



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**814055**  
 Component  
**Transmission (Auto)**  
 Fluid  
**PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info |             | <b>GFL0099270</b>  | ---      | ---      |
| Sample Date   | Client Info |             | <b>15 Jan 2024</b> | ---      | ---      |
| Machine Age   | hrs         | Client Info | <b>148</b>         | ---      | ---      |
| Oil Age       | hrs         | Client Info | <b>0</b>           | ---      | ---      |
| Oil Changed   | Client Info |             | <b>Not Chngd</b>   | ---      | ---      |
| Sample Status |             |             | <b>NORMAL</b>      | ---      | ---      |

## CONTAMINATION

|       | method    | limit/base | current    | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.1       | <b>NEG</b> | ---      | ---      |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >220 | <b>37</b>    | ---      | ---      |
| Chromium | ppm    | ASTM D5185m >2   | <b>&lt;1</b> | ---      | ---      |
| Nickel   | ppm    | ASTM D5185m >5   | <b>&lt;1</b> | ---      | ---      |
| Titanium | ppm    | ASTM D5185m      | <b>&lt;1</b> | ---      | ---      |
| Silver   | ppm    | ASTM D5185m >5   | <b>0</b>     | ---      | ---      |
| Aluminum | ppm    | ASTM D5185m >75  | <b>9</b>     | ---      | ---      |
| Lead     | ppm    | ASTM D5185m >95  | <b>3</b>     | ---      | ---      |
| Copper   | ppm    | ASTM D5185m >60  | <b>9</b>     | ---      | ---      |
| Tin      | ppm    | ASTM D5185m >10  | <b>2</b>     | ---      | ---      |
| Vanadium | ppm    | ASTM D5185m      | <b>&lt;1</b> | ---      | ---      |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>     | ---      | ---      |

## ADDITIVES

|            | method | limit/base  | current      | history1 | history2 |
|------------|--------|-------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m | <b>48</b>    | ---      | ---      |
| Barium     | ppm    | ASTM D5185m | <b>&lt;1</b> | ---      | ---      |
| Molybdenum | ppm    | ASTM D5185m | <b>0</b>     | ---      | ---      |
| Manganese  | ppm    | ASTM D5185m | <b>3</b>     | ---      | ---      |
| Magnesium  | ppm    | ASTM D5185m | <b>&lt;1</b> | ---      | ---      |
| Calcium    | ppm    | ASTM D5185m | <b>113</b>   | ---      | ---      |
| Phosphorus | ppm    | ASTM D5185m | <b>209</b>   | ---      | ---      |
| Zinc       | ppm    | ASTM D5185m | <b>19</b>    | ---      | ---      |
| Sulfur     | ppm    | ASTM D5185m | <b>1609</b>  | ---      | ---      |

## CONTAMINANTS


|           | method | limit/base      | current   | history1 | history2 |
|-----------|--------|-----------------|-----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25 | <b>17</b> | ---      | ---      |
| Sodium    | ppm    | ASTM D5185m     | <b>5</b>  | ---      | ---      |
| Potassium | ppm    | ASTM D5185m >20 | <b>3</b>  | ---      | ---      |

## VISUAL

|                  | method | limit/base    | current      | history1 | history2 |
|------------------|--------|---------------|--------------|----------|----------|
| White Metal      | scalar | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Yellow Metal     | scalar | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Precipitate      | scalar | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Silt             | scalar | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Debris           | scalar | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Sand/Dirt        | scalar | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Appearance       | scalar | *Visual NORML | <b>NORML</b> | ---      | ---      |
| Odor             | scalar | *Visual NORML | <b>NORML</b> | ---      | ---      |
| Emulsified Water | scalar | *Visual >0.1  | <b>NEG</b>   | ---      | ---      |
| Free Water       | scalar | *Visual       | <b>NEG</b>   | ---      | ---      |



# OIL ANALYSIS REPORT

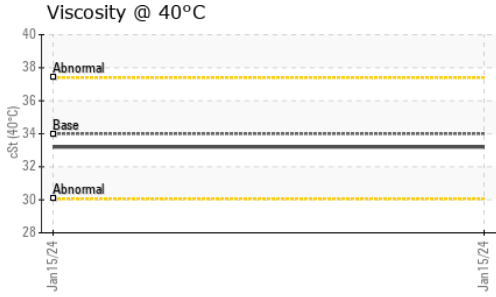




## FLUID PROPERTIES

| method      | limit/base       | current     | history1 | history2 |
|-------------|------------------|-------------|----------|----------|
| Visc @ 40°C | cSt ASTM D445 34 | <b>33.2</b> | ---      | ---      |

## SAMPLE IMAGES

| method | limit/base | current  | history1 | history2 |
|--------|------------|----------|----------|----------|
| Color  |            | no image | no image | no image |
| Bottom |            | no image | no image | no image |

## GRAPHS

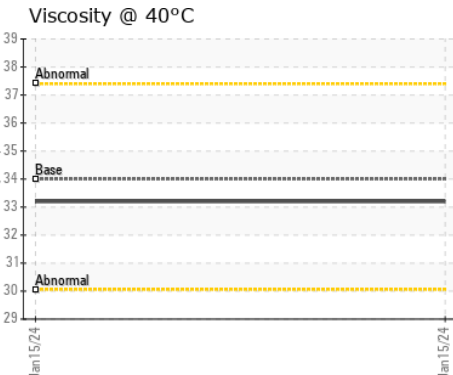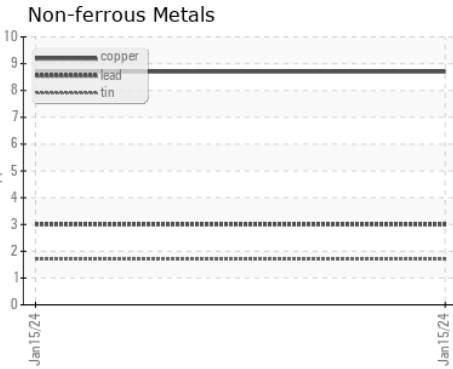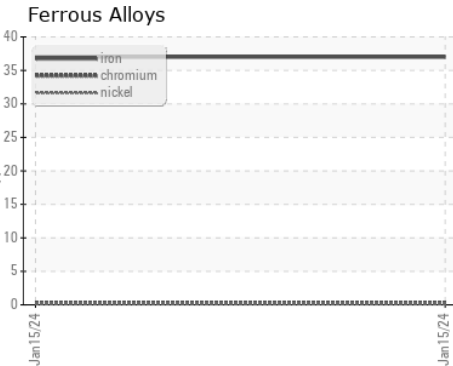

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0099270 **Recieved** : 31 Jan 2024  
**Lab Number** : **06076464** **Diagnosed** : 01 Feb 2024  
**Unique Number** : 10858555 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 846 - Mayfield Hauling**  
 3426 State Route 45  
 Mayfield, KY  
 US 42066  
 Contact: Jack Lindsey  
 jack.lindsey@gflenv.com  
 T: (270)970-3690  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)