


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**CHICAGO 95TH**  
Machine Id  
**JOHN DEERE 744J L-74 (S/N DW744JX596276)**  
Component  
**Diesel Engine**  
Fluid  
**NAPA Motor Oil 15W40 (--- GAL)**

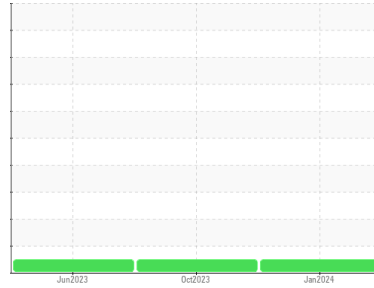

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0113118</b>	PCA0105656	PCA0097258
Sample Date	Client Info		<b>19 Jan 2024</b>	02 Oct 2023	28 Jun 2023
Machine Age	hrs	Client Info	<b>7613</b>	7337	0
Oil Age	hrs	Client Info	<b>250</b>	1000	0
Oil Changed	Client Info		<b>Changed</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.1	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.21	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >51	<b>2</b>	5	6
Chromium	ppm	ASTM D5185m >11	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	4
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >31	<b>1</b>	1	<1
Lead	ppm	ASTM D5185m >26	<b>2</b>	1	2
Copper	ppm	ASTM D5185m >26	<b>4</b>	<1	4
Tin	ppm	ASTM D5185m >4	<b>1</b>	<1	1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>4</b>	4	11
Barium	ppm	ASTM D5185m	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m	<b>50</b>	48	46
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>870</b>	837	790
Calcium	ppm	ASTM D5185m	<b>978</b>	931	1339
Phosphorus	ppm	ASTM D5185m	<b>975</b>	917	1006
Zinc	ppm	ASTM D5185m	<b>1153</b>	1137	1241
Sulfur	ppm	ASTM D5185m	<b>2987</b>	2768	3793

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >22	<b>4</b>	3	4
Sodium	ppm	ASTM D5185m >31	<b>2</b>	2	2
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	4



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0.3	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.4</b>	6.6	5.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.1</b>	17.8	17.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.8</b>	14.0	12.3
Base Number (BN)	mg KOH/g	ASTM D2896	<b>9.4</b>	7.6	8.8









# OIL ANALYSIS REPORT

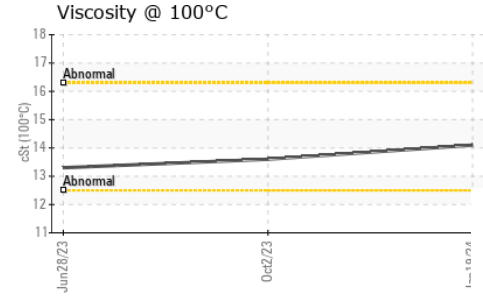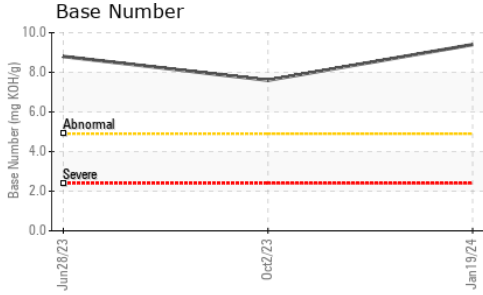

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>14.1</b>	13.6	13.3

## GRAPHS

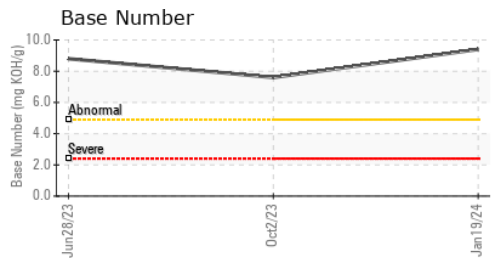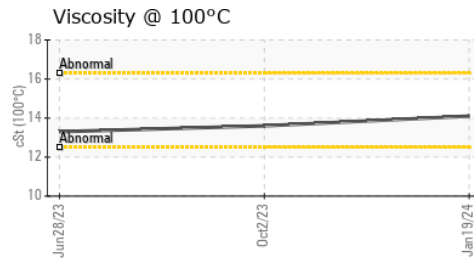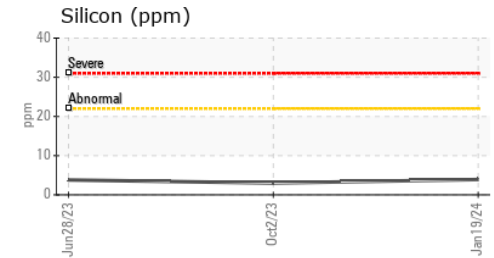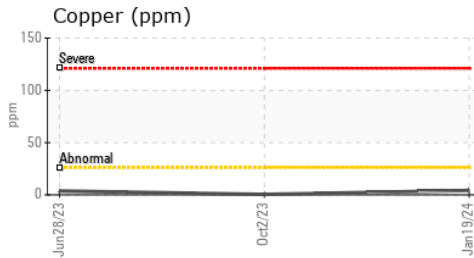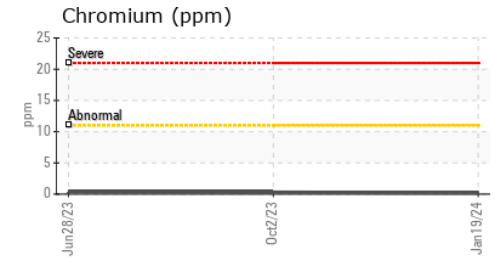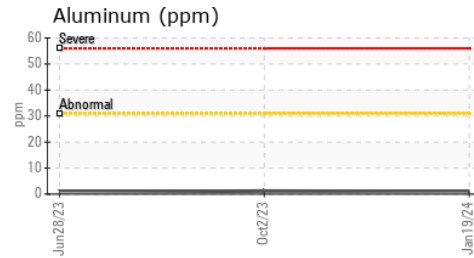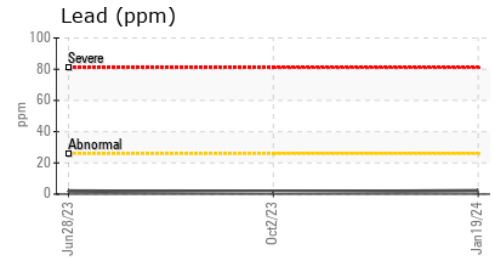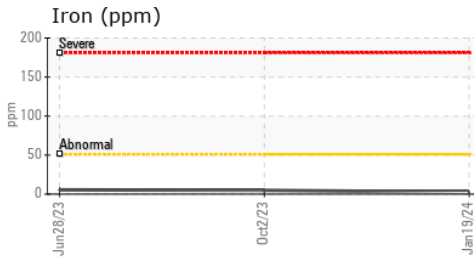

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0113118 **Received** : 01 Feb 2024  
**Lab Number** : **06076487** **Tested** : 01 Feb 2024  
**Unique Number** : 10858578 **Diagnosed** : 01 Feb 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**NORTH AMERICAN STEVEDORING CO**  
 9301 S KREITER AVE  
 CHICAGO, IL  
 US 60617  
 Contact: PACO MARTINEZ  
 paco.martinez@qsl.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: