


OIL ANALYSIS REPORT

Sample Rating Trend

FUEL

Area
CHICAGO 95TH
 Machine Id
INTERNATIONAL 8100 4X2 WT-03 (S/N 1HSHBAAN9SH645707)
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

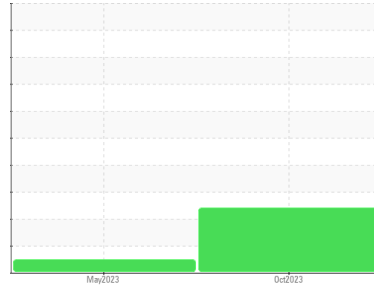

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of fuel present in the oil.

Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0105645	PCA0097265	---
Sample Date	Client Info	16 Oct 2023	09 May 2023	---
Machine Age	hrs	Client Info	0	254134
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	Changed	---
Sample Status		SEVERE	NORMAL	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG
Glycol	WC Method		NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	6	13
Chromium	ppm	ASTM D5185m	>20	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	<1
Titanium	ppm	ASTM D5185m		<1	1
Silver	ppm	ASTM D5185m	>3	0	0
Aluminum	ppm	ASTM D5185m	>20	2	1
Lead	ppm	ASTM D5185m	>40	2	4
Copper	ppm	ASTM D5185m	>330	<1	2
Tin	ppm	ASTM D5185m	>15	<1	1
Vanadium	ppm	ASTM D5185m		<1	<1
Cadmium	ppm	ASTM D5185m		0	<1

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	250	<1	5
Barium	ppm	ASTM D5185m	10	0	0
Molybdenum	ppm	ASTM D5185m	100	38	62
Manganese	ppm	ASTM D5185m		<1	<1
Magnesium	ppm	ASTM D5185m	450	648	1045
Calcium	ppm	ASTM D5185m	3000	784	1229
Phosphorus	ppm	ASTM D5185m	1150	793	1087
Zinc	ppm	ASTM D5185m	1350	923	1397
Sulfur	ppm	ASTM D5185m	4250	2374	3997

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	3	3
Sodium	ppm	ASTM D5185m	>158	1	2
Potassium	ppm	ASTM D5185m	>20	<1	2
Fuel	%	ASTM D3524	>2.0	18.0	<1.0




INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	0.2	0.1
Nitration	Abs/cm	*ASTM D7624	>20	8.3	7.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.9	19.6

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.2	15.8
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.7	9.6









OIL ANALYSIS REPORT

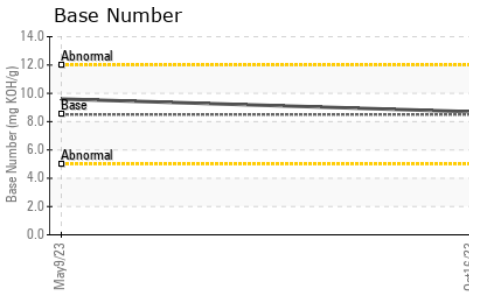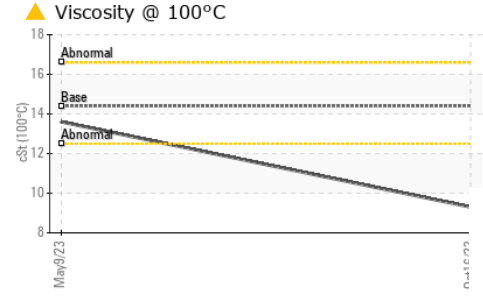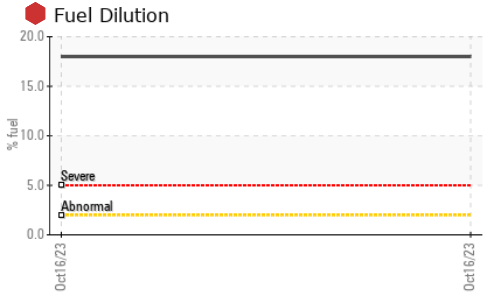

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	▲ 9.3	13.6	---

GRAPHS

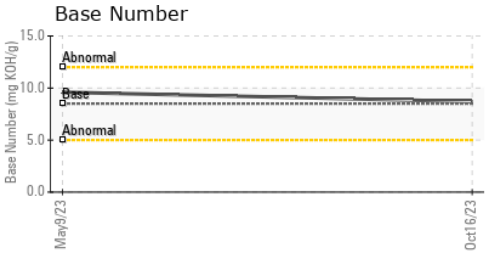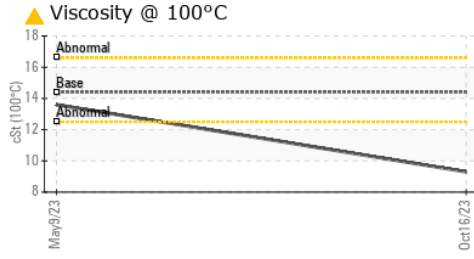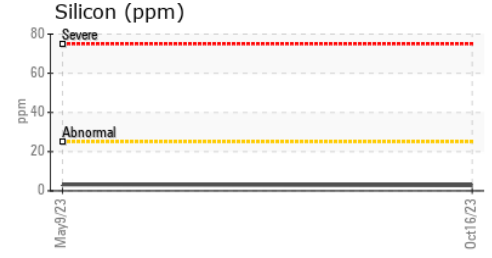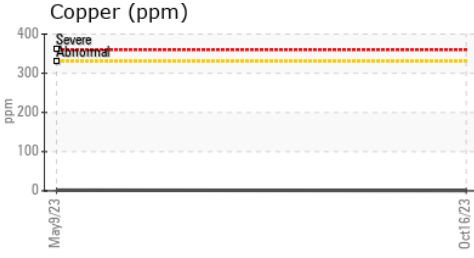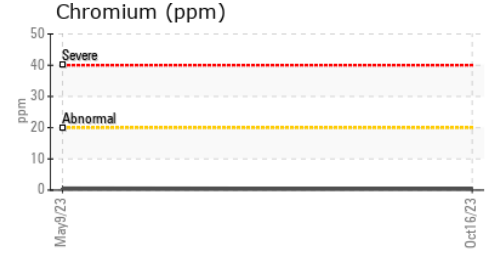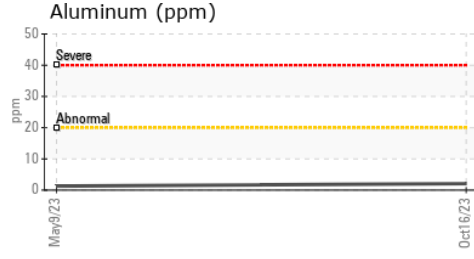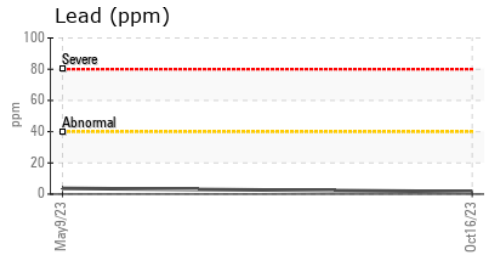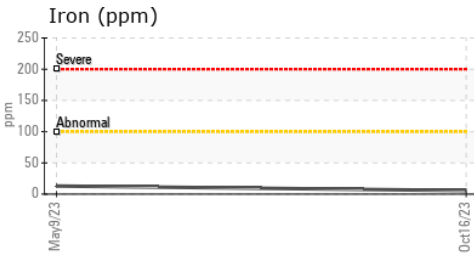

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0105645 **Received** : 01 Feb 2024
Lab Number : 06076491 **Tested** : 05 Feb 2024
Unique Number : 10858582 **Diagnosed** : 05 Feb 2024 - Jonathan Hester
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, TBN)

NORTH AMERICAN STEVEDORING CO
 9301 S KREITER AVE
 CHICAGO, IL
 US 60617
 Contact: PACO MARTINEZ
 paco.martinez@qsl.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: