


# OIL ANALYSIS REPORT

Sample Rating Trend

GLYCOL

Area  
**CHICAGO 95TH**  
Machine Id  
**HYSTER H110FT 111-51 (S/N R005V01742K)**  
Component  
**Propane Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 10W30 (--- GAL)**

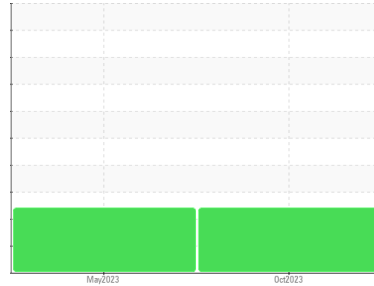

## DIAGNOSIS

### Recommendation

We advise that you check for possible coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high. Fuel content negligible.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0105653</b>	PCA0097284	---
Sample Date	Client Info		<b>09 Oct 2023</b>	26 May 2023	---
Machine Age	hrs	Client Info	<b>5964</b>	3743	---
Oil Age	hrs	Client Info	<b>500</b>	0	---
Oil Changed	Client Info		<b>N/A</b>	Changed	---
Sample Status			<b>ABNORMAL</b>	SEVERE	---

CONTAMINATION	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	---

WEAR METALS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>37</b>	39	---
Chromium	ppm	ASTM D5185m >25	<b>2</b>	2	---
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	2	---
Silver	ppm	ASTM D5185m >5	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	6	---
Lead	ppm	ASTM D5185m >25	<b>19</b>	11	---
Copper	ppm	ASTM D5185m >35	<b>6</b>	4	---
Tin	ppm	ASTM D5185m >8	<b>1</b>	1	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	---


ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>12</b>	8	---
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 100	<b>64</b>	45	---
Manganese	ppm	ASTM D5185m	<b>4</b>	3	---
Magnesium	ppm	ASTM D5185m 450	<b>582</b>	661	---
Calcium	ppm	ASTM D5185m 3000	<b>824</b>	995	---
Phosphorus	ppm	ASTM D5185m 1150	<b>619</b>	762	---
Zinc	ppm	ASTM D5185m 1350	<b>788</b>	971	---
Sulfur	ppm	ASTM D5185m 4250	<b>2308</b>	2792	---

CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>9</b>	8	---
Sodium	ppm	ASTM D5185m	<b>▲ 45</b>	9	---
Potassium	ppm	ASTM D5185m >20	<b>▲ 106</b>	19	---
Fuel	%	ASTM D3524 >4.0	<b>0.3</b>	18.9	---


INFRA-RED	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0.7	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.8</b>	13.3	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.4</b>	25.1	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>11.7</b>	25.6	---
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>5.0</b>	5.3	---


# OIL ANALYSIS REPORT

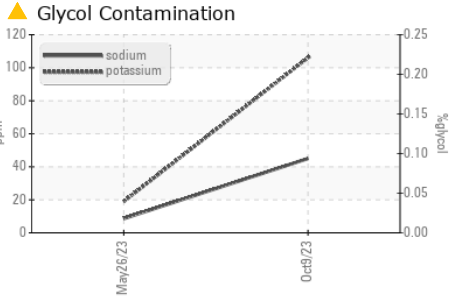










VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

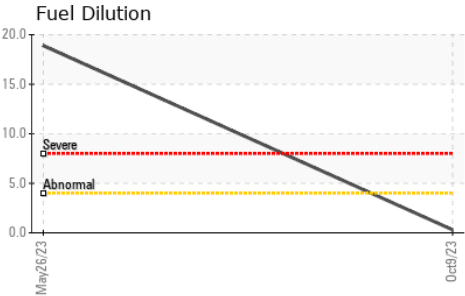

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.9	▲ 9.1	---

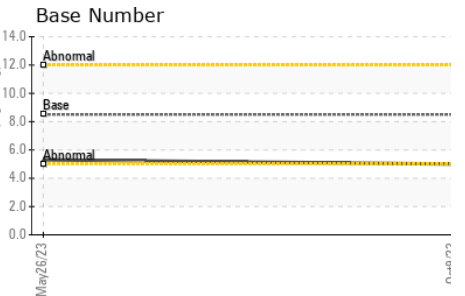

## GRAPHS

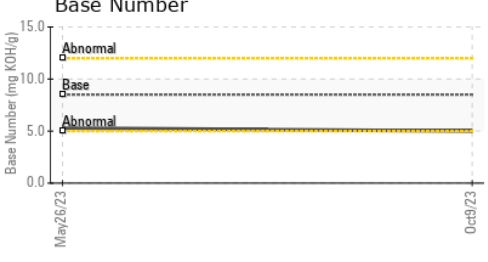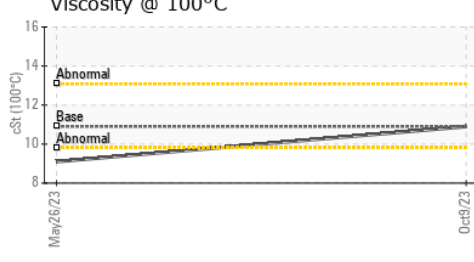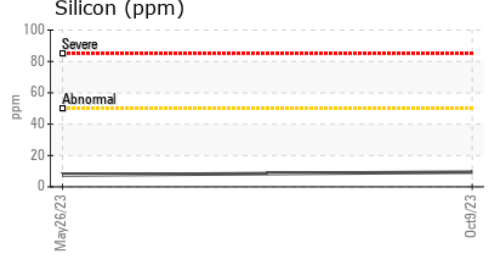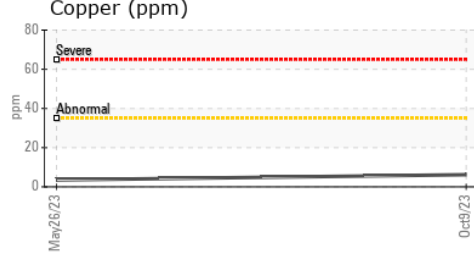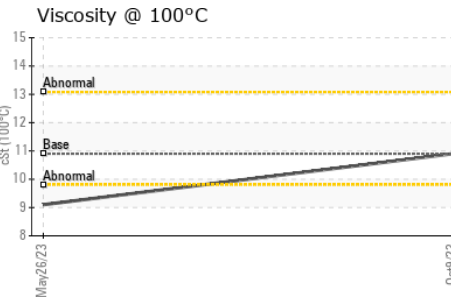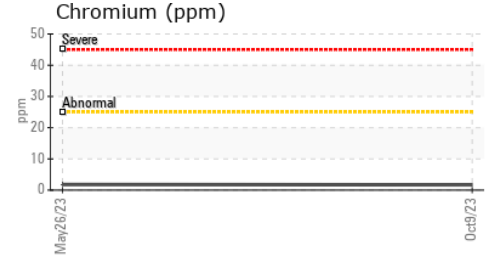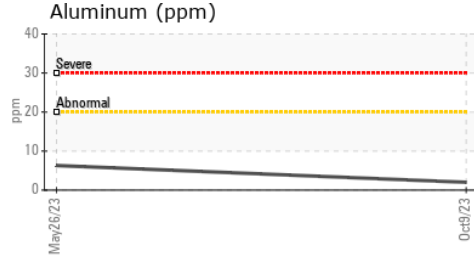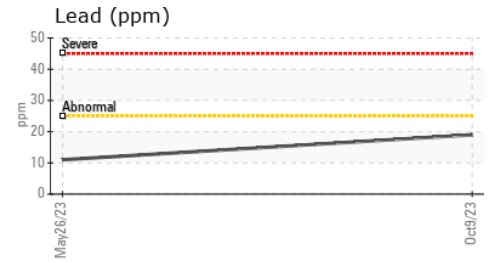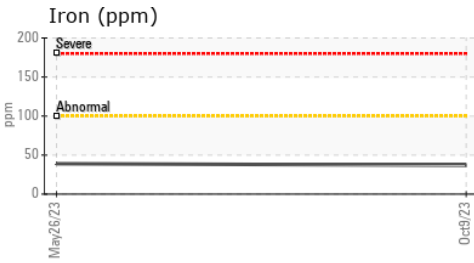

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0105653 **Received** : 01 Feb 2024  
**Lab Number** : 06076499 **Tested** : 05 Feb 2024  
**Unique Number** : 10858590 **Diagnosed** : 05 Feb 2024 - Jonathan Hester  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, PercentFuel )

**NORTH AMERICAN STEVEDORING CO**  
 9301 S KREITER AVE  
 CHICAGO, IL  
 US 60617  
 Contact: PACO MARTINEZ  
 paco.martinez@qsl.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: