


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

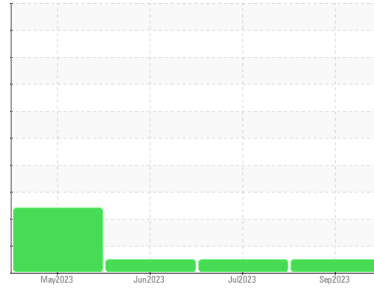

Area  
**CHICAGO 95TH**  
 Machine Id  
**TAYLOR T520M 452-11 (S/N S ED 34772)**  
 Component  
**Diesel Engine**  
 Fluid  
**NAPA Motor Oil 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0105671</b>	PCA0097294	PCA0097286
Sample Date	Client Info		<b>06 Sep 2023</b>	11 Jul 2023	23 Jun 2023
Machine Age	hrs	Client Info	<b>14390</b>	0	14252
Oil Age	hrs	Client Info	<b>500</b>	0	250
Oil Changed	Client Info		<b>N/A</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	<b>5</b>	9	9
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m >2	<b>1</b>	2	2
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185m >40	<b>2</b>	2	2
Copper	ppm	ASTM D5185m >330	<b>3</b>	<1	<1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>8</b>	5	4
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>48</b>	44	46
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>804</b>	730	790
Calcium	ppm	ASTM D5185m	<b>1012</b>	1069	1179
Phosphorus	ppm	ASTM D5185m	<b>941</b>	884	965
Zinc	ppm	ASTM D5185m	<b>1110</b>	1088	1190
Sulfur	ppm	ASTM D5185m	<b>2679</b>	3265	3570

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	3	3
Sodium	ppm	ASTM D5185m	<b>4</b>	4	2
Potassium	ppm	ASTM D5185m >20	<b>1</b>	12	4



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>0.5</b>	0.4	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.0</b>	5.4	5.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.5</b>	17.9	18.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.8</b>	12.9	13.2
Base Number (BN)	mg KOH/g	ASTM D2896	<b>9.5</b>	9.2	9.2









# OIL ANALYSIS REPORT

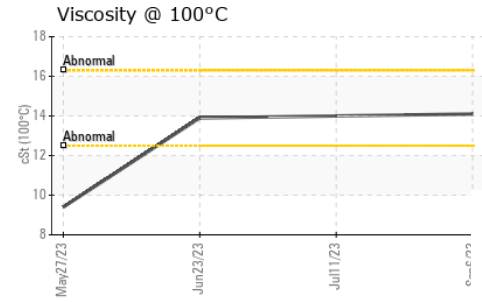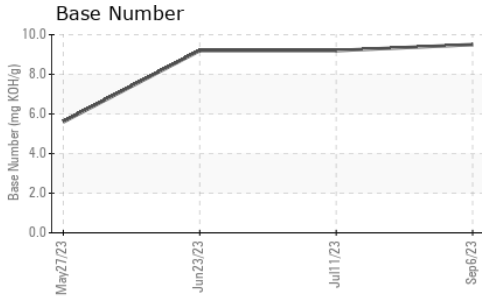

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>14.1</b>	14.0	13.9

## GRAPHS

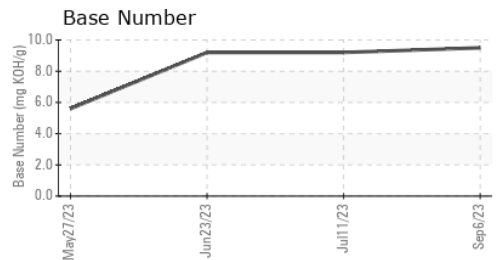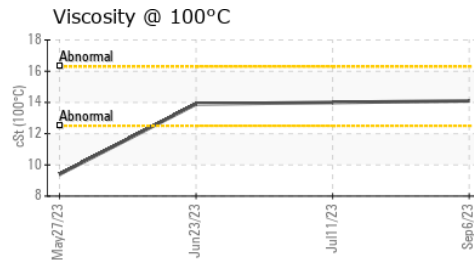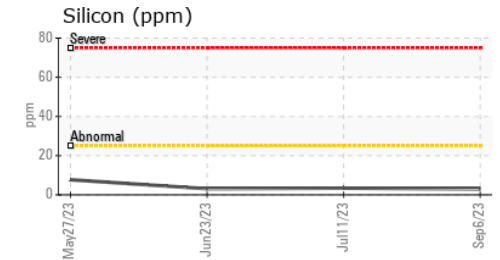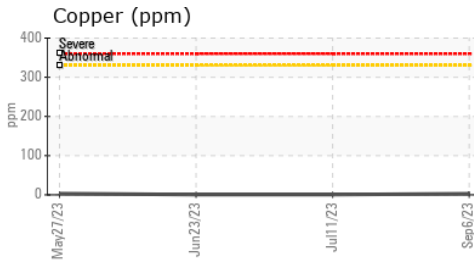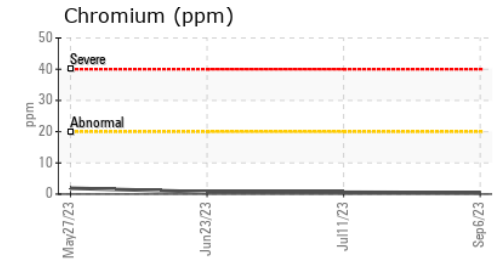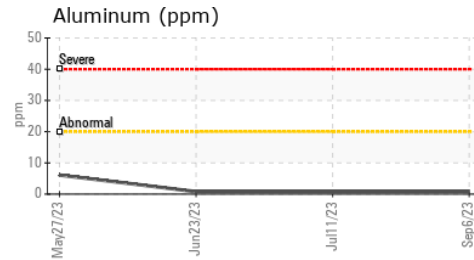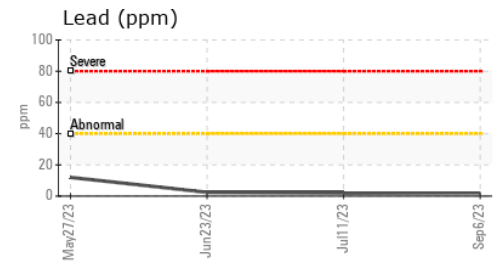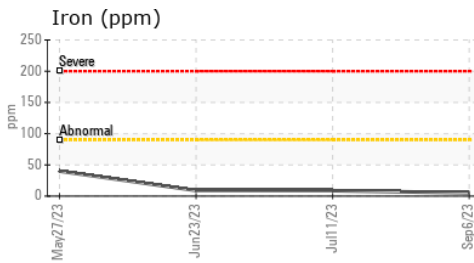

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0105671      **Received** : 01 Feb 2024  
**Lab Number** : **06076510**      **Tested** : 01 Feb 2024  
**Unique Number** : 10858601      **Diagnosed** : 01 Feb 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**NORTH AMERICAN STEVEDORING CO**  
 9301 S KREITER AVE  
 CHICAGO, IL  
 US 60617  
 Contact: PACO MARTINEZ  
 paco.martinez@qsl.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: