




# OIL ANALYSIS REPORT

Sample Rating Trend

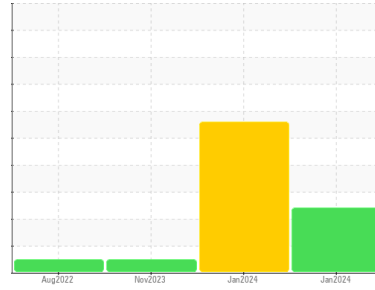

GLYCOL



Machine Id  
**7823M**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0110050</b>	GFL0110020	GFL0059146
Sample Date	Client Info	<b>26 Jan 2024</b>	11 Jan 2024	07 Nov 2023
Machine Age	hrs	<b>8765</b>	8607	8503
Oil Age	hrs	<b>600</b>	8607	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>ABNORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	<b>7</b>	▲ 111	71
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	6	2
Nickel	ppm ASTM D5185m >2	<b>0</b>	1	<1
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	<1	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	3
Aluminum	ppm ASTM D5185m >20	<b>4</b>	▲ 18	5
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	6	<1
Copper	ppm ASTM D5185m >330	<b>&lt;1</b>	7	6
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	1	0
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>16</b>	28	0
Barium	ppm ASTM D5185m 0	<b>0</b>	0	6
Molybdenum	ppm ASTM D5185m 60	<b>63</b>	153	67
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	2	<1
Magnesium	ppm ASTM D5185m 1010	<b>841</b>	936	938
Calcium	ppm ASTM D5185m 1070	<b>894</b>	1065	1182
Phosphorus	ppm ASTM D5185m 1150	<b>944</b>	1026	1035
Zinc	ppm ASTM D5185m 1270	<b>1106</b>	1314	1260
Sulfur	ppm ASTM D5185m 2060	<b>2631</b>	3144	3098

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>18</b>	▲ 36	14
Sodium	ppm ASTM D5185m	▲ <b>451</b>	▲ 1802	0
Potassium	ppm ASTM D5185m >20	▲ <b>38</b>	▲ 23	2
Glycol	% *ASTM D2982	<b>NEG</b>	NEG	NEG

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>0.2</b>	2.3	0.9
Nitration	Abs/cm *ASTM D7624 >20	<b>8.0</b>	17.8	13.0
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.6</b>	28.9	24.9

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.2</b>	22.1	25.7
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>10.5</b>	9.9	5.8







# OIL ANALYSIS REPORT

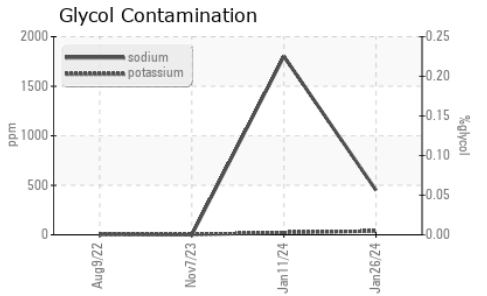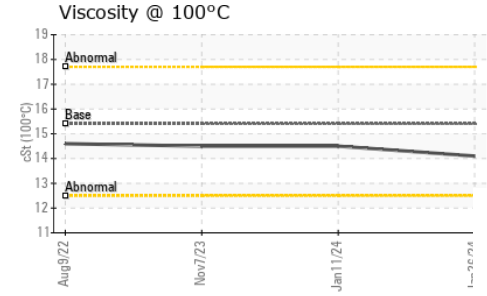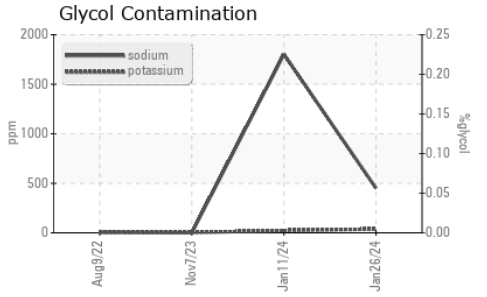

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.1</b>	14.5

## GRAPHS

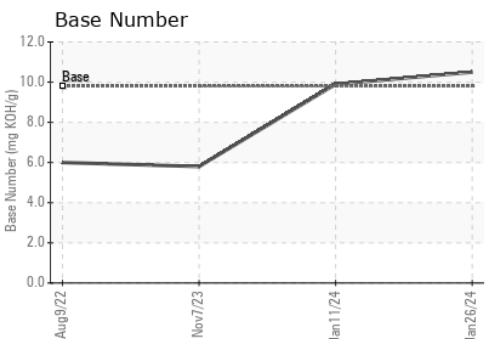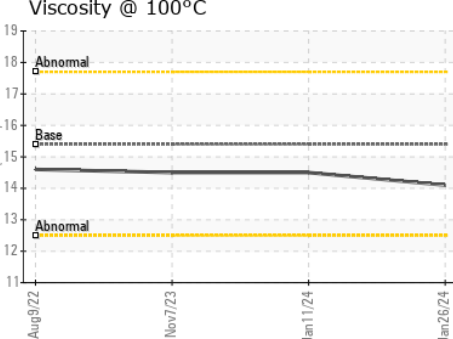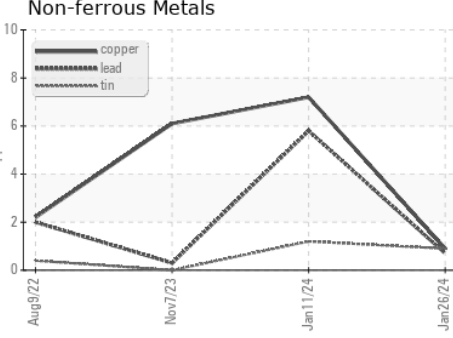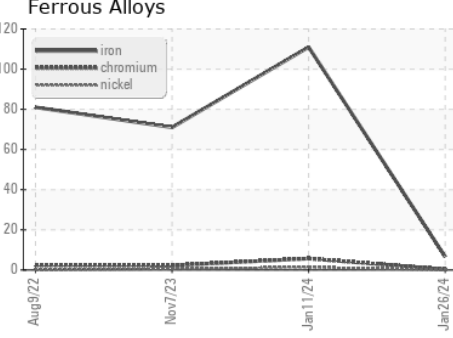

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0110050 **Received** : 01 Feb 2024  
**Lab Number** : 06076542 **Tested** : 05 Feb 2024  
**Unique Number** : 10858633 **Diagnosed** : 05 Feb 2024 - Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 410 - Michigan West**  
 39000 Van Born Rd  
 Wayne, MI  
 US 48184  
 Contact: Belal Dgheish  
 bdgheish@gflenv.com  
 T: (734)714-2340  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)