


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

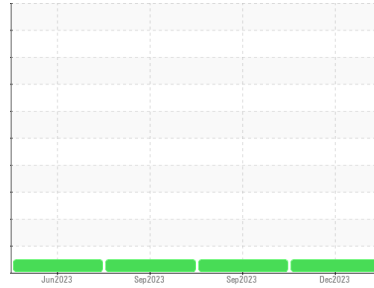

Area
CHICAGO 95TH
 Machine Id
DOOSAN DV250S-7 355-01 (S/N FDC06-2290-00094)
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	PCA0113128	PCA0105670	PCA0105662	
Sample Date	Client Info	10 Dec 2023	07 Sep 2023	05 Sep 2023	
Machine Age	hrs	Client Info	6190	14390	17365
Oil Age	hrs	Client Info	500	250	250
Oil Changed	Client Info	Changed	N/A	Changed	
Sample Status		NORMAL	NORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.1	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	1	<1	0
Chromium	ppm ASTM D5185m >20	0	<1	<1
Nickel	ppm ASTM D5185m >5	0	0	0
Titanium	ppm ASTM D5185m	<1	1	1
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	1	<1	<1
Lead	ppm ASTM D5185m >40	<1	3	2
Copper	ppm ASTM D5185m >30	<1	4	<1
Tin	ppm ASTM D5185m >15	<1	1	<1
Vanadium	ppm ASTM D5185m	0	<1	<1
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	5	4	5
Barium	ppm ASTM D5185m	<1	0	0
Molybdenum	ppm ASTM D5185m	55	48	50
Manganese	ppm ASTM D5185m	<1	<1	<1
Magnesium	ppm ASTM D5185m	902	825	861
Calcium	ppm ASTM D5185m	998	1018	975
Phosphorus	ppm ASTM D5185m	1016	965	977
Zinc	ppm ASTM D5185m	1197	1154	1162
Sulfur	ppm ASTM D5185m	2969	3005	2925

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	3	2	2
Sodium	ppm ASTM D5185m	<1	1	2
Potassium	ppm ASTM D5185m >20	0	<1	<1



INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.1	0.3	0.1
Nitration	Abs/cm *ASTM D7624 >20	5.3	5.7	5.2
Sulfation	Abs/.1mm *ASTM D7415 >30	17.5	18.0	17.4

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	13.2	13.4	13.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	9.4	9.2	9.2









OIL ANALYSIS REPORT

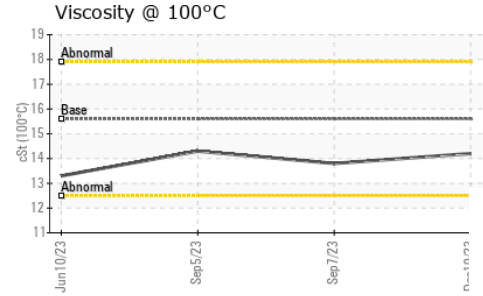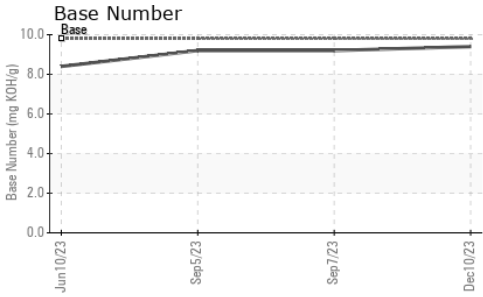

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.6	14.2	13.8	14.3

GRAPHS

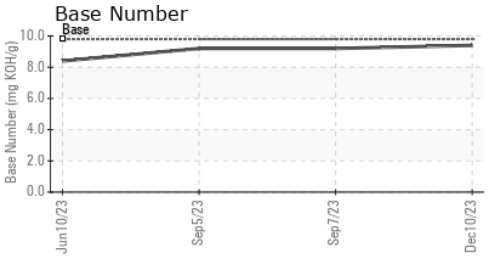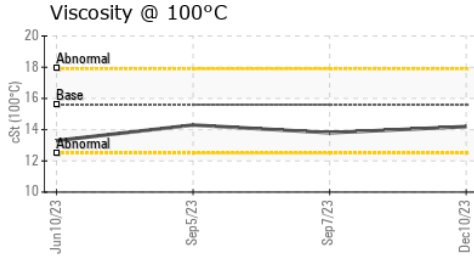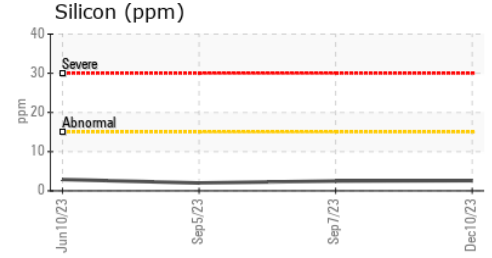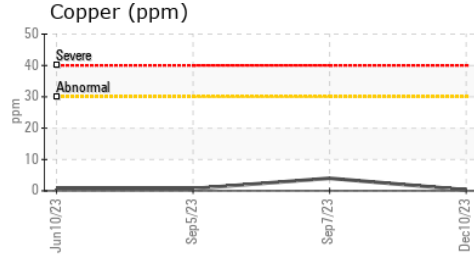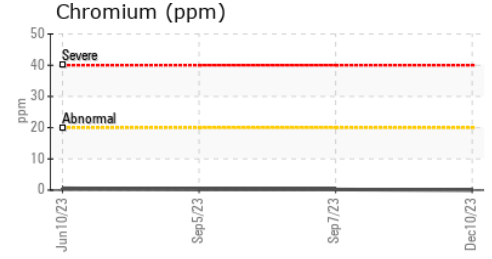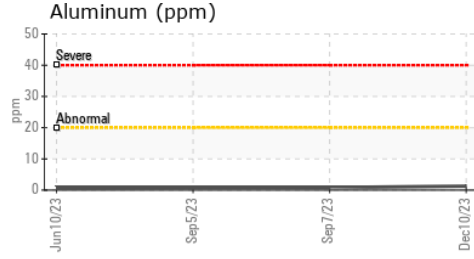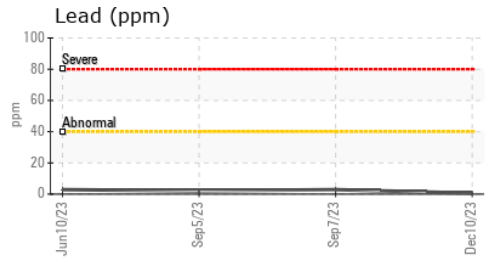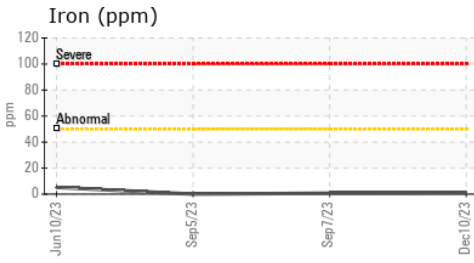

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0113128 **Received** : 01 Feb 2024
Lab Number : **06076570** **Tested** : 01 Feb 2024
Unique Number : 10858661 **Diagnosed** : 01 Feb 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

NORTH AMERICAN STEVEDORING CO
 9301 S KREITER AVE
 CHICAGO, IL
 US 60617
 Contact: PACO MARTINEZ
 paco.martinez@qsl.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: