


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

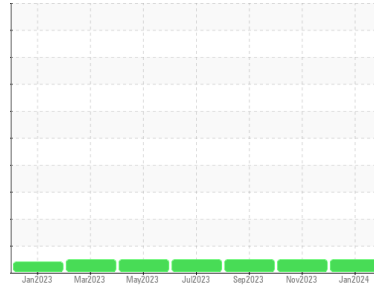

Area  
**Plymouth & Brockton**  
Machine Id  
**11448**

Component  
**Diesel Engine**  
Fluid

**PETRO CANADA DURON SHP 15W40 (36 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0104733</b>	PCA0098615	PCA0098691
Sample Date	Client Info		<b>27 Jan 2024</b>	11 Nov 2023	07 Sep 2023
Machine Age	mls	Client Info	<b>85937</b>	68745	58647
Oil Age	mls	Client Info	<b>12000</b>	24000	12000
Oil Changed	Client Info		<b>Not Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	<b>11</b>	13	5
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	<1	<1
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>0</b>	0	0
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>5</b>	6	10
Barium	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>56</b>	60	57
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 1010	<b>878</b>	1004	936
Calcium	ppm	ASTM D5185m 1070	<b>984</b>	1210	1093
Phosphorus	ppm	ASTM D5185m 1150	<b>953</b>	1146	1026
Zinc	ppm	ASTM D5185m 1270	<b>1165</b>	1505	1272
Sulfur	ppm	ASTM D5185m 2060	<b>2766</b>	3402	3178

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	3	4
Sodium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	0



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>1.2</b>	1.1	0.6
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.6</b>	7.9	6.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.1</b>	19.7	18.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.8</b>	14.0	13.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.50</b>	9.74	10.43









# OIL ANALYSIS REPORT

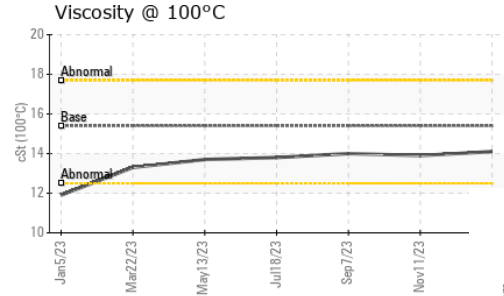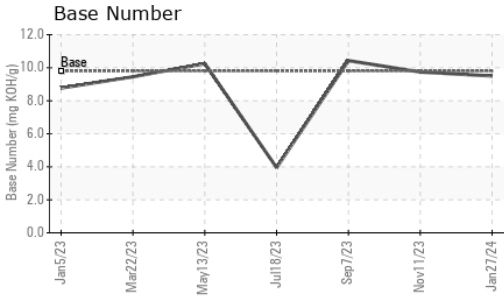

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.1</b>	13.9	14.0

## GRAPHS

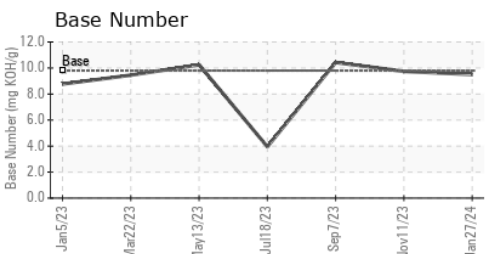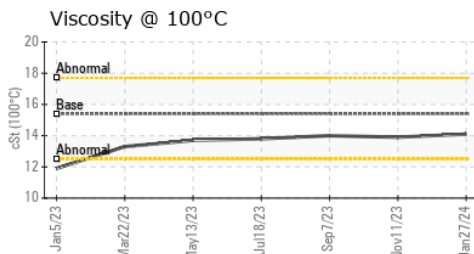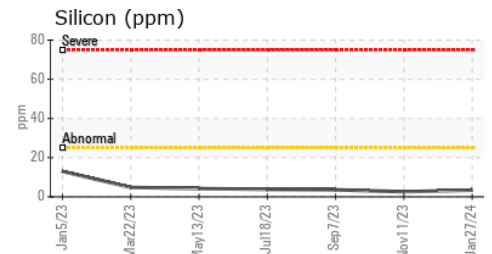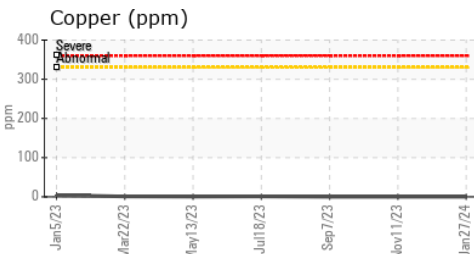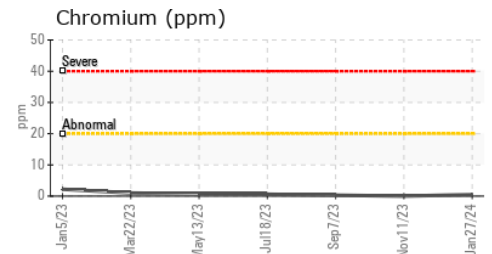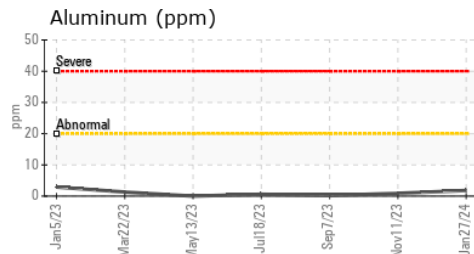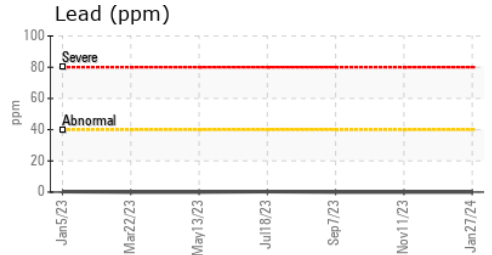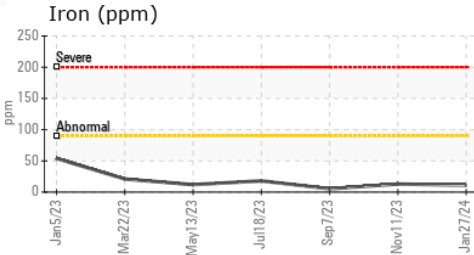

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0104733 **Recieved** : 01 Feb 2024  
**Lab Number** : **06077075** **Diagnosed** : 02 Feb 2024  
**Unique Number** : 10859166 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**PLYMOUTH & BROCKTON**  
 8 INDUSTRIAL PARK RD  
 PLYMOUTH, MA  
 US 02360  
 Contact: Donald Pelquin  
 Dpelquin@P-B.com  
 T: (508)732-6039  
 F: (508)732-6091

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)