


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

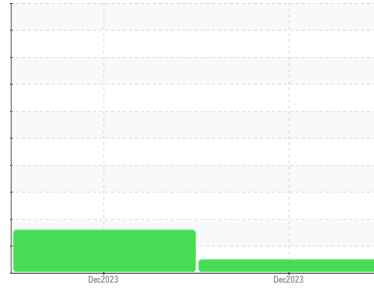

Machine Id  
**CHEVROLET 610 (S/N 1GNSKLED7NR271857)**

Component  
**Gasoline Engine**

Fluid  
**PETRO CANADA SUPREME 5W20 MOTOR OIL (8 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0112917</b>	PCA0112901	---
Sample Date	Client Info		<b>29 Dec 2023</b>	01 Dec 2023	---
Machine Age	mls	Client Info	<b>2944</b>	1393	---
Oil Age	mls	Client Info	<b>1551</b>	1393	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	ABNORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	<b>16</b>	45	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	---
Nickel	ppm	ASTM D5185m >5	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m >40	<b>2</b>	5	---
Lead	ppm	ASTM D5185m >50	<b>2</b>	<1	---
Copper	ppm	ASTM D5185m >155	<b>92</b>	266	---
Tin	ppm	ASTM D5185m >10	<b>1</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 183	<b>45</b>	48	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 36	<b>78</b>	148	---
Manganese	ppm	ASTM D5185m 0	<b>8</b>	23	---
Magnesium	ppm	ASTM D5185m 417	<b>552</b>	403	---
Calcium	ppm	ASTM D5185m 1318	<b>1151</b>	1166	---
Phosphorus	ppm	ASTM D5185m 773	<b>685</b>	650	---
Zinc	ppm	ASTM D5185m 845	<b>812</b>	740	---
Sulfur	ppm	ASTM D5185m 2690	<b>2106</b>	1728	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>35</b>	▲ 184	---
Sodium	ppm	ASTM D5185m >400	<b>2</b>	8	---
Potassium	ppm	ASTM D5185m >20	<b>3</b>	16	---



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0.1	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.3</b>	6.7	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.8</b>	16.7	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.6</b>	10.9	---
Base Number (BN)	mg KOH/g	ASTM D2896 6.5	<b>5.4</b>	5.8	---









# OIL ANALYSIS REPORT

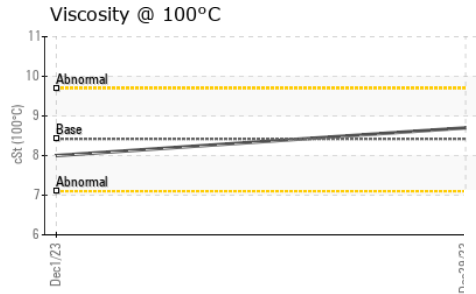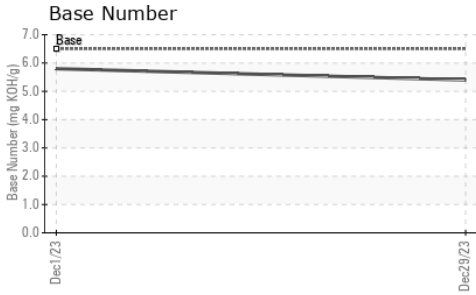

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	8.42	<b>8.7</b>	8	---

## GRAPHS

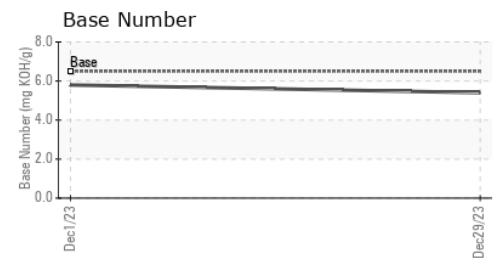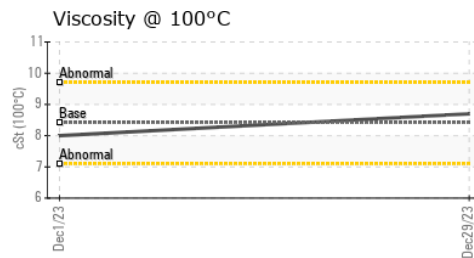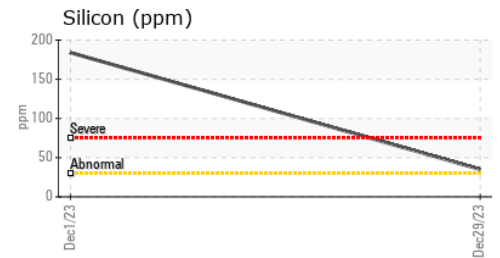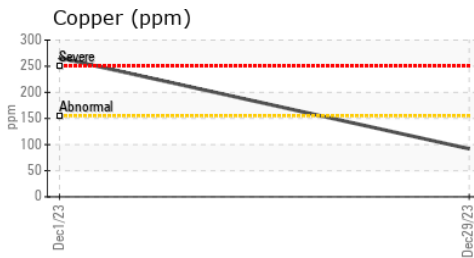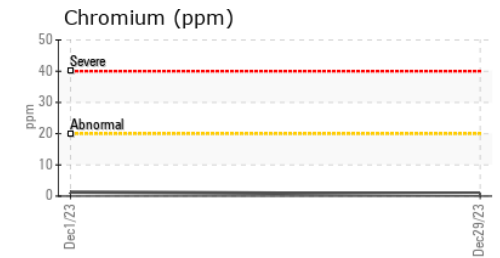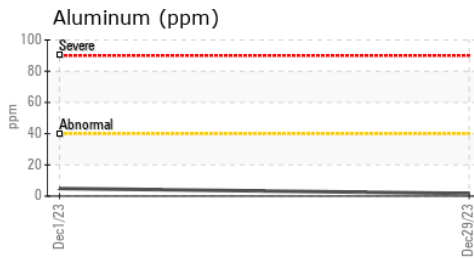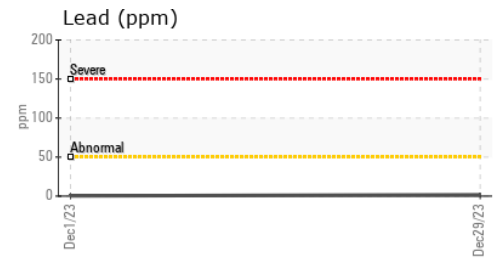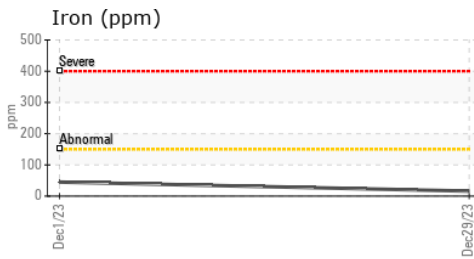

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0112917      **Received** : 01 Feb 2024  
**Lab Number** : **06077444**      **Tested** : 02 Feb 2024  
**Unique Number** : 10859535      **Diagnosed** : 02 Feb 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**VILLAGE OF NORTH RIVERSIDE**  
 2345 S DESPLAINES  
 NORTH RIVERSIDE, IL  
 US 60546  
 Contact: Service Manager  
 vznrpdw@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: