


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

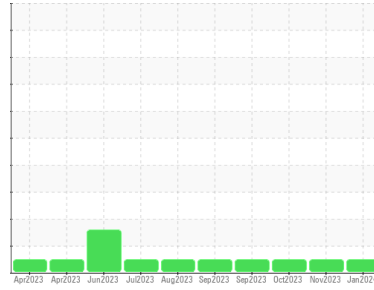

Machine Id  
**FORD 611 (S/N 1FM5K8AROHGC56634)**

Component  
**Gasoline Engine**

Fluid  
**PETRO CANADA SUPREME 5W20 MOTOR OIL (6 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0112904</b>	PCA0112896	PCA0105345
Sample Date	Client Info		<b>10 Jan 2024</b>	16 Nov 2023	25 Oct 2023
Machine Age	mls	Client Info	<b>105194</b>	104293	102961
Oil Age	mls	Client Info	<b>901</b>	1332	1933
Oil Changed	Client Info		<b>Changed</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	<b>&lt;1</b>	2	3
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >40	<b>1</b>	2	2
Lead	ppm	ASTM D5185m >50	<b>1</b>	0	<1
Copper	ppm	ASTM D5185m >155	<b>1</b>	<1	2
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 183	<b>93</b>	80	62
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	9
Molybdenum	ppm	ASTM D5185m 36	<b>68</b>	63	69
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 417	<b>571</b>	499	524
Calcium	ppm	ASTM D5185m 1318	<b>1149</b>	1103	1243
Phosphorus	ppm	ASTM D5185m 773	<b>752</b>	701	730
Zinc	ppm	ASTM D5185m 845	<b>845</b>	787	833
Sulfur	ppm	ASTM D5185m 2690	<b>2762</b>	2796	3064

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>14</b>	15	21
Sodium	ppm	ASTM D5185m >400	<b>2</b>	4	2
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	2



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.5</b>	6.9	7.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>16.6</b>	16.8	18.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>11.1</b>	11.6	13.4
Base Number (BN)	mg KOH/g	ASTM D2896 6.5	<b>5.9</b>	6.1	5.7









# OIL ANALYSIS REPORT

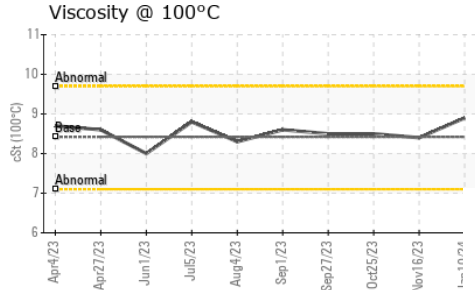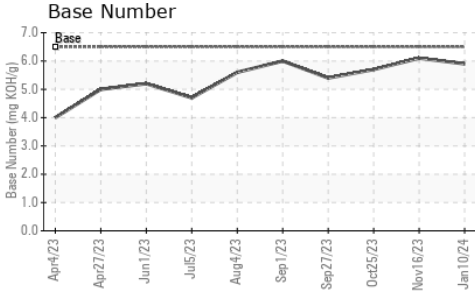

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	8.42	8.9	8.4

## GRAPHS

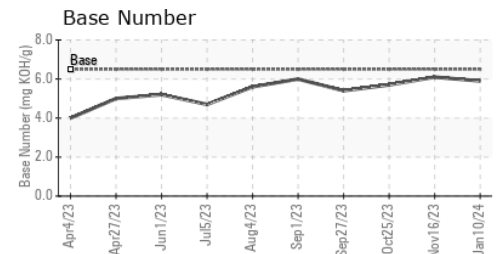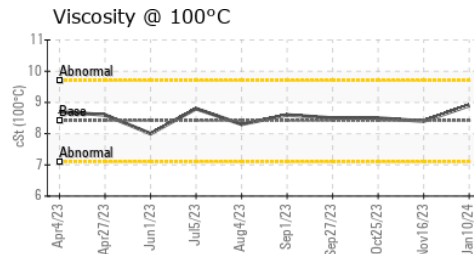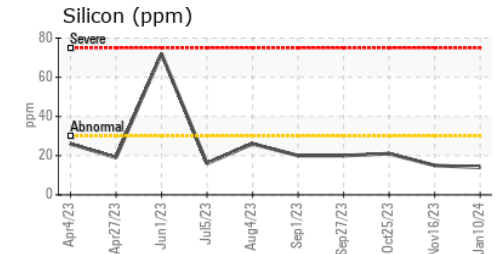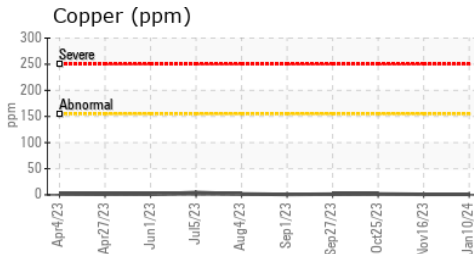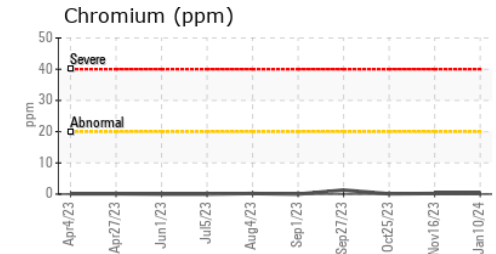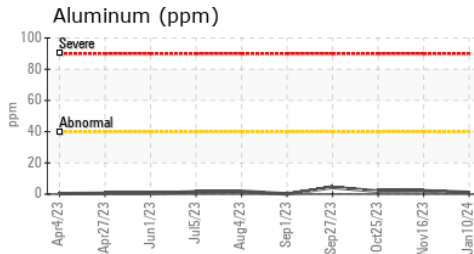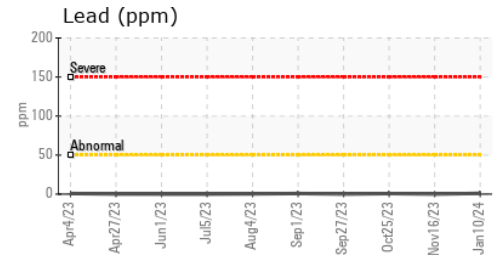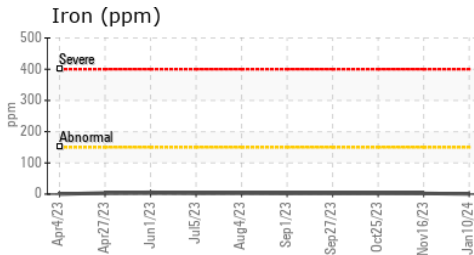

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0112904      **Received** : 01 Feb 2024  
**Lab Number** : 06077446      **Tested** : 02 Feb 2024  
**Unique Number** : 10859537      **Diagnosed** : 02 Feb 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**VILLAGE OF NORTH RIVERSIDE**  
 2345 S DESPLAINES  
 NORTH RIVERSIDE, IL  
 US 60546  
 Contact: Service Manager  
 vznrpdw@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: