


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

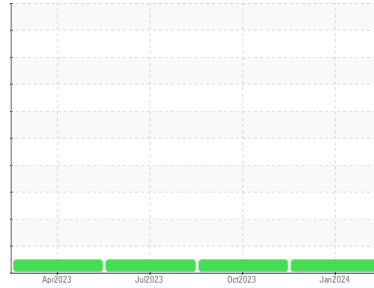

Machine Id  
**FORD 624 (S/N 1FM5K8AR1EGA28492)**  
 Component  
**Gasoline Engine**  
 Fluid  
**PETRO CANADA SUPREME 5W20 MOTOR OIL (6 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0112910</b>	PCA0105347	PCA0100372
Sample Date	Client Info		<b>25 Jan 2024</b>	20 Oct 2023	18 Jul 2023
Machine Age	mls	Client Info	<b>100763</b>	99237	97781
Oil Age	mls	Client Info	<b>1526</b>	1456	1496
Oil Changed	Client Info		<b>Changed</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	<b>4</b>	2	3
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m >5	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >40	<b>1</b>	2	1
Lead	ppm	ASTM D5185m >50	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m >155	<b>5</b>	8	6
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 183	<b>125</b>	110	120
Barium	ppm	ASTM D5185m 0	<b>0</b>	9	2
Molybdenum	ppm	ASTM D5185m 36	<b>67</b>	67	63
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 417	<b>514</b>	510	455
Calcium	ppm	ASTM D5185m 1318	<b>1123</b>	1222	1230
Phosphorus	ppm	ASTM D5185m 773	<b>704</b>	728	681
Zinc	ppm	ASTM D5185m 845	<b>797</b>	810	798
Sulfur	ppm	ASTM D5185m 2690	<b>2642</b>	3119	2828

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>16</b>	16	15
Sodium	ppm	ASTM D5185m >400	<b>3</b>	3	4
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	<1



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0.1	0
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.5</b>	7.7	7.6
Sulfation	Abs.1mm	*ASTM D7415 >30	<b>17.6</b>	16.6	17.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs.1mm	*ASTM D7414 >25	<b>11.5</b>	11.7	11.7
Base Number (BN)	mg KOH/g	ASTM D2896 6.5	<b>4.7</b>	4.7	5.4









# OIL ANALYSIS REPORT

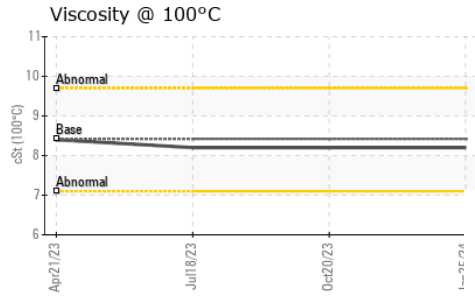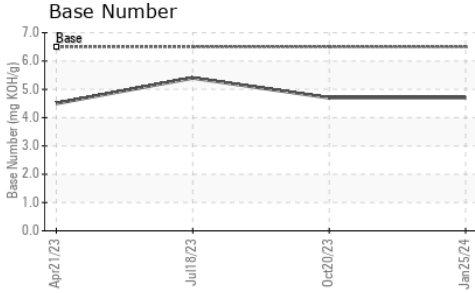

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	8.42	<b>8.2</b>	8.2

## GRAPHS

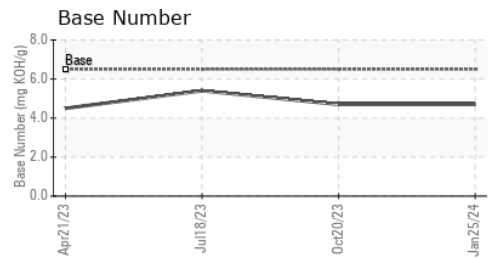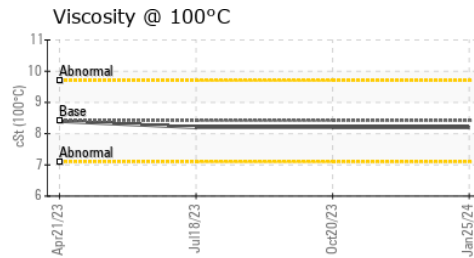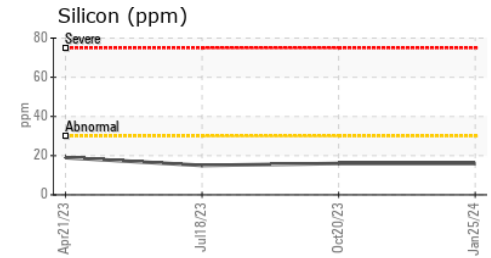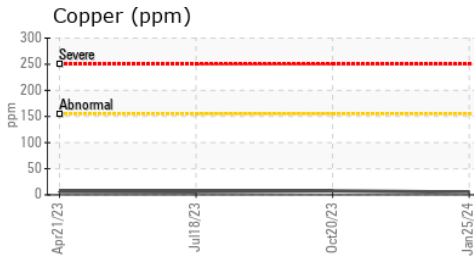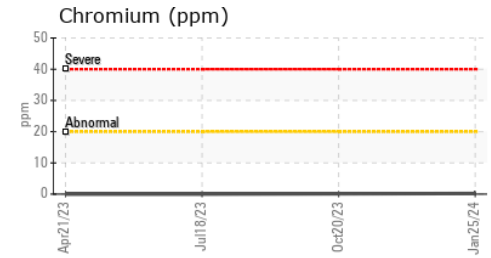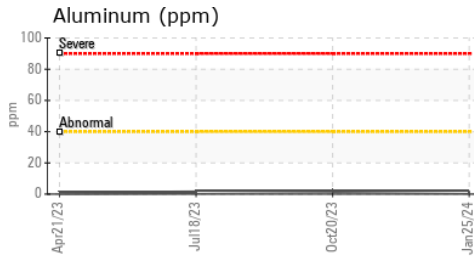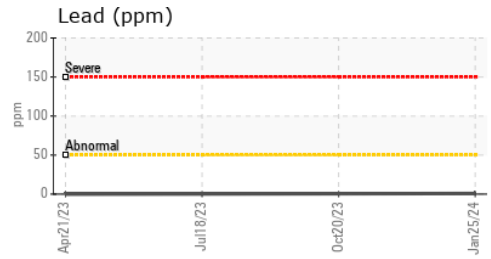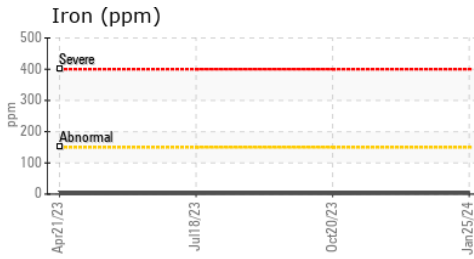

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0112910      **Received** : 01 Feb 2024  
**Lab Number** : 06077449      **Tested** : 02 Feb 2024  
**Unique Number** : 10859540      **Diagnosed** : 02 Feb 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**VILLAGE OF NORTH RIVERSIDE**  
 2345 S DESPLAINES  
 NORTH RIVERSIDE, IL  
 US 60546  
 Contact: Service Manager  
 vznrdpw@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: