


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

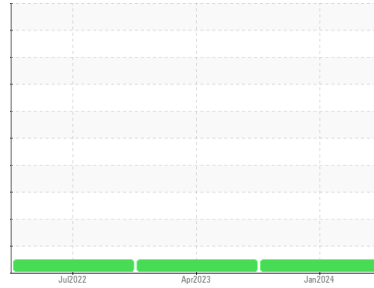

Area  
**(89831X) Walgreens - Tractor**  
Machine Id  
**[Walgreens - Tractor] 136A68043**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0116417</b>	PCA0095126	PCA0078517
Sample Date	Client Info	<b>22 Jan 2024</b>	17 Apr 2023	25 Jul 2022
Machine Age	mls Client Info	<b>622639</b>	569846	509776
Oil Age	mls Client Info	<b>52864</b>	60070	39266
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	<b>36</b>	39	20
Chromium	ppm ASTM D5185m >5	<b>2</b>	2	1
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >30	<b>21</b>	24	12
Lead	ppm ASTM D5185m >30	<b>&lt;1</b>	0	0
Copper	ppm ASTM D5185m >150	<b>4</b>	4	3
Tin	ppm ASTM D5185m >5	<b>1</b>	0	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	<b>2</b>	4	4
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 50	<b>66</b>	65	60
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	1	<1
Magnesium	ppm ASTM D5185m 950	<b>936</b>	991	849
Calcium	ppm ASTM D5185m 1050	<b>1043</b>	1202	1060
Phosphorus	ppm ASTM D5185m 995	<b>1020</b>	1034	902
Zinc	ppm ASTM D5185m 1180	<b>1189</b>	1283	1152
Sulfur	ppm ASTM D5185m 2600	<b>2459</b>	3076	2432

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>7</b>	7	5
Sodium	ppm ASTM D5185m	<b>2</b>	3	<1
Potassium	ppm ASTM D5185m >20	<b>7</b>	8	<1



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>1.2</b>	1.4	1.2
Nitration	Abs/cm *ASTM D7624 >20	<b>10.6</b>	11.0	11.2
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>23.8</b>	23.3	24.4

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>19.7</b>	20.2	19.3
Base Number (BN)	mg KOH/g ASTM D2896	<b>5.5</b>	4.4	7.0





# OIL ANALYSIS REPORT

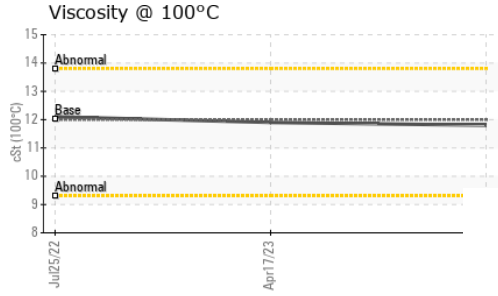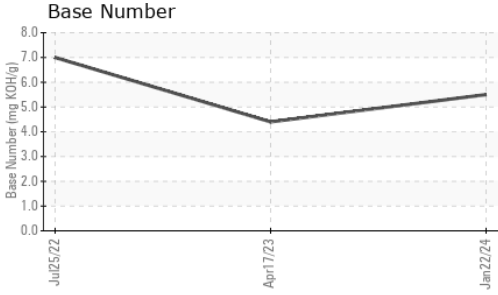

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.8</b>	11.9	12.1

## GRAPHS

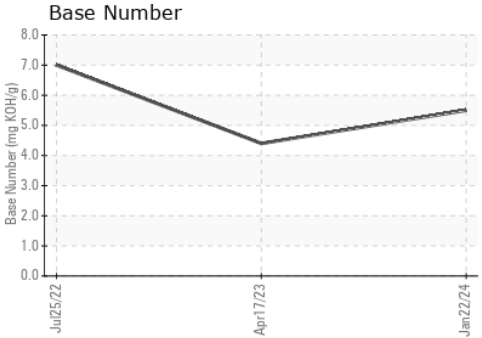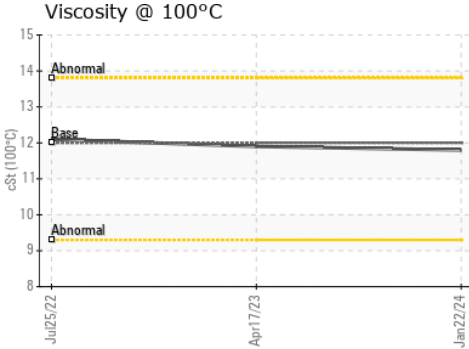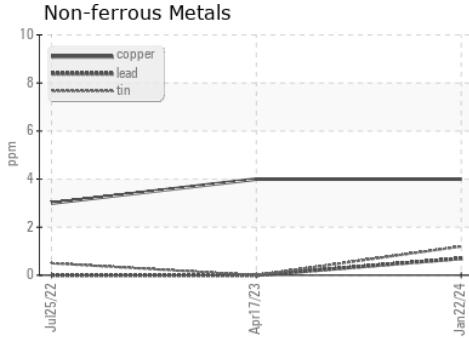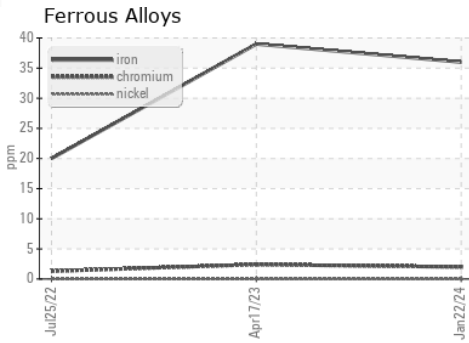

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0116417 **Received** : 01 Feb 2024  
**Lab Number** : **06077453** **Diagnosed** : 02 Feb 2024  
**Unique Number** : 10859544 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1373 - Berkeley-Anderson/Pendergrass**  
 101 Alliance Parkway  
 Willamston, SC  
 US 29697  
 Contact: Sonny Boucher  
 sboucher@transervice.com  
 T: (864)226-2304  
 F: (864)226-2329

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)