



# OIL ANALYSIS REPORT

Sample Rating Trend

COOL CHEMICALS

Machine Id  
**433020**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**



## DIAGNOSIS

### ▲ Recommendation

Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### ▲ Contamination

Sodium and/or potassium levels are high. Test for glycol is negative.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0103963</b>	---	---
Sample Date	Client Info			<b>27 Jan 2024</b>	---	---
Machine Age	hrs	Client Info		<b>603</b>	---	---
Oil Age	hrs	Client Info		<b>603</b>	---	---
Oil Changed	Client Info			<b>Changed</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>31</b>	---	---
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>9	<b>11</b>	---	---
Lead	ppm	ASTM D5185m	>30	<b>1</b>	---	---
Copper	ppm	ASTM D5185m	>35	<b>15</b>	---	---
Tin	ppm	ASTM D5185m	>4	<b>1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	50	<b>7</b>	---	---
Barium	ppm	ASTM D5185m	5	<b>2</b>	---	---
Molybdenum	ppm	ASTM D5185m	50	<b>48</b>	---	---
Manganese	ppm	ASTM D5185m	0	<b>13</b>	---	---
Magnesium	ppm	ASTM D5185m	560	<b>710</b>	---	---
Calcium	ppm	ASTM D5185m	1510	<b>1143</b>	---	---
Phosphorus	ppm	ASTM D5185m	780	<b>653</b>	---	---
Zinc	ppm	ASTM D5185m	870	<b>872</b>	---	---
Sulfur	ppm	ASTM D5185m	2040	<b>2233</b>	---	---


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>+100	<b>33</b>	---	---
Sodium	ppm	ASTM D5185m		<b>4</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>▲ 51</b>	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		<b>0</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>12.3</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.5</b>	---	---


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.0</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	<b>4.9</b>	---	---



# OIL ANALYSIS REPORT





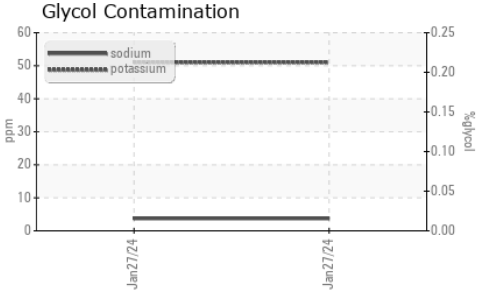


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

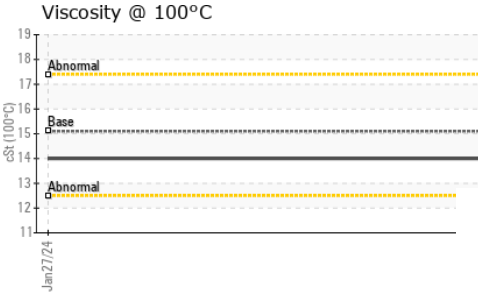

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.0	---

## GRAPHS

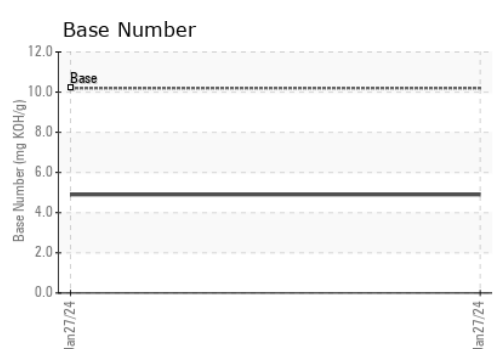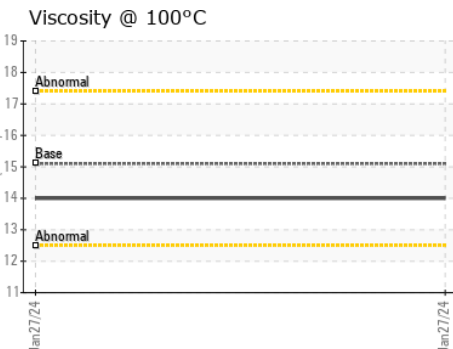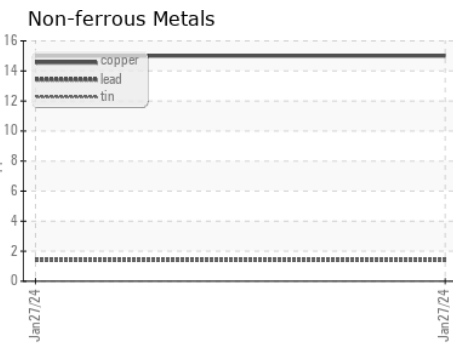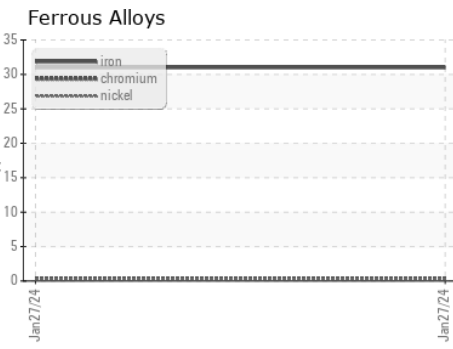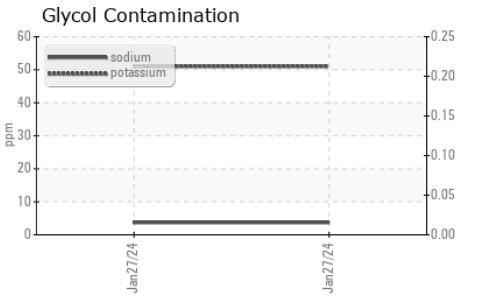

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0103963 **Received** : 02 Feb 2024  
**Lab Number** : 06077954 **Diagnosed** : 05 Feb 2024  
**Unique Number** : 10860045 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 865 - East Mount Hauling**  
 7213 East Mount Houston Road  
 Houston, TX  
 US 77050  
 Contact: Saul Castillo  
 saul.castillo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: