




OIL ANALYSIS REPORT

Sample Rating Trend

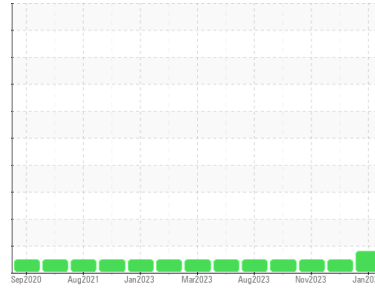

WEAR



Machine Id
920088-205328

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (12 GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

Valve wear is indicated. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			GFL0109151	GFL0098336	GFL0098291
Sample Date	Client Info			25 Jan 2024	29 Nov 2023	14 Nov 2023
Machine Age	hrs	Client Info		9659	9342	9226
Oil Age	hrs	Client Info		317	700	150
Oil Changed	Client Info			N/A	Changed	Not Chngd
Sample Status				ABNORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>165	18	10	7
Chromium	ppm	ASTM D5185m	>5	▲ 7	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	0	0
Titanium	ppm	ASTM D5185m	>2	<1	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	1	1
Lead	ppm	ASTM D5185m	>150	<1	0	0
Copper	ppm	ASTM D5185m	>90	<1	0	<1
Tin	ppm	ASTM D5185m	>5	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<1	0	0
Barium	ppm	ASTM D5185m	0	0	3	0
Molybdenum	ppm	ASTM D5185m	60	57	60	59
Manganese	ppm	ASTM D5185m	0	<1	0	0
Magnesium	ppm	ASTM D5185m	1010	934	870	903
Calcium	ppm	ASTM D5185m	1070	961	972	1013
Phosphorus	ppm	ASTM D5185m	1150	977	945	943
Zinc	ppm	ASTM D5185m	1270	1200	1132	1168
Sulfur	ppm	ASTM D5185m	2060	3110	3185	3160

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>35	4	2	2
Sodium	ppm	ASTM D5185m		0	1	1
Potassium	ppm	ASTM D5185m	>20	8	4	4


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>7.5	0.6	0.6	0.4
Nitration	Abs/cm	*ASTM D7624	>20	6.0	7.0	6.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.0	18.5	18.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	12.8	13.7	13.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	8.6	8.3	8.3




OIL ANALYSIS REPORT


▲ Ferrous Alloys

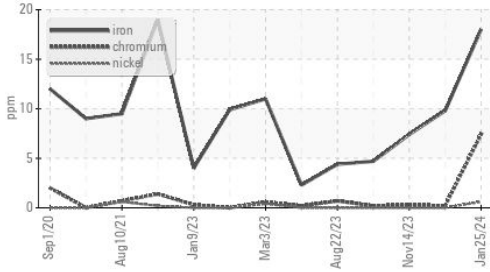

Base Number

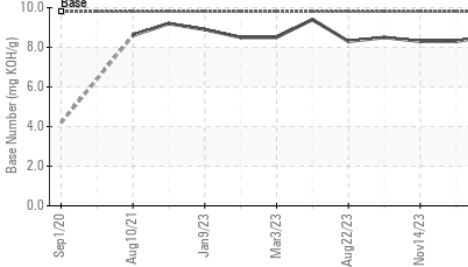

Viscosity @ 100°C

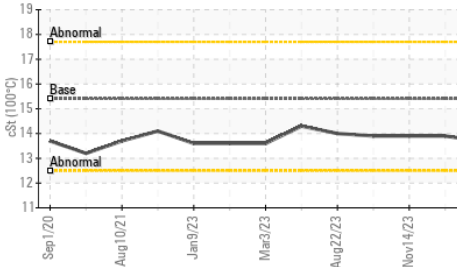


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.7	13.9

GRAPHS


▲ Ferrous Alloys

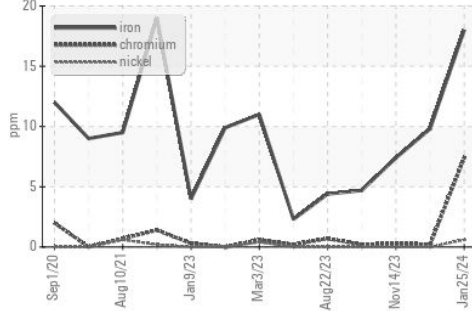


Non-ferrous Metals

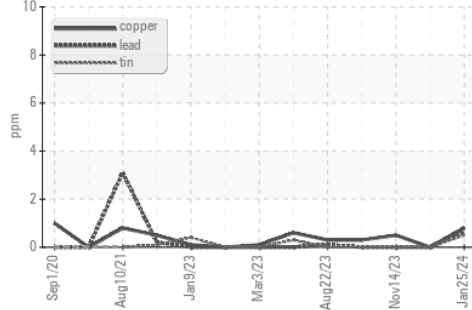

Viscosity @ 100°C

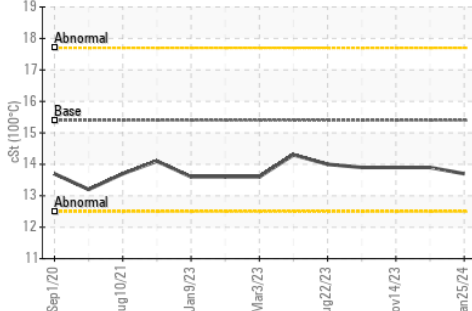

Base Number

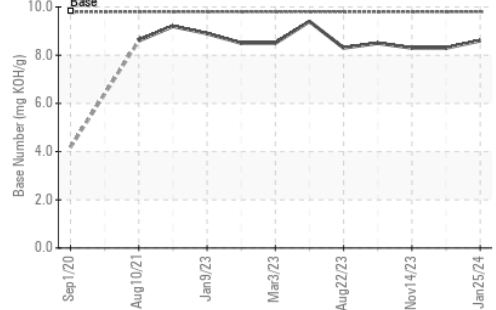

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0109151 **Recieved** : 02 Feb 2024
Lab Number : 06078168 **Diagnosed** : 05 Feb 2024
Unique Number : 10860259 **Diagnostician** : Don Baldrige
Test Package : FLEET

GFL Environmental - 822 - Springfield Hauling
 2120 West Bennett Street
 Springfield, MO
 US 65807
 Contact: Dennis Moore
 dennis.moore@gflenv.com
 T: (417)403-3641
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)