




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

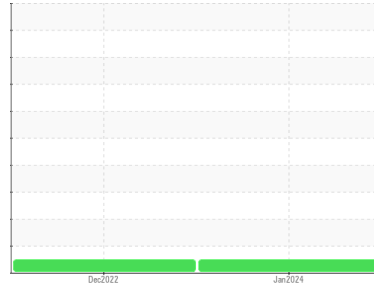

Machine Id  
**422037**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0099266</b>	GFL0065994	---
Sample Date	Client Info	<b>31 Jan 2024</b>	14 Dec 2022	---
Machine Age	hrs	<b>20071</b>	19930	---
Oil Age	hrs	<b>0</b>	0	---
Oil Changed	Client Info	<b>Changed</b>	Changed	---
Sample Status		<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method >0.2	<b>NEG</b>	NEG	---
Glycol	WC Method	<b>NEG</b>	NEG	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>4</b>	4	---
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	---
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	0	---
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	---
Silver	ppm ASTM D5185m >3	<b>0</b>	0	---
Aluminum	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	---
Lead	ppm ASTM D5185m >40	<b>1</b>	1	---
Copper	ppm ASTM D5185m >330	<b>&lt;1</b>	<1	---
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	---
Vanadium	ppm ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>3</b>	3	---
Barium	ppm ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm ASTM D5185m 60	<b>59</b>	63	---
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	---
Magnesium	ppm ASTM D5185m 1010	<b>961</b>	964	---
Calcium	ppm ASTM D5185m 1070	<b>982</b>	1126	---
Phosphorus	ppm ASTM D5185m 1150	<b>931</b>	1121	---
Zinc	ppm ASTM D5185m 1270	<b>1220</b>	1308	---
Sulfur	ppm ASTM D5185m 2060	<b>3071</b>	3612	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>7</b>	4	---
Sodium	ppm ASTM D5185m	<b>0</b>	1	---
Potassium	ppm ASTM D5185m >20	<b>1</b>	0	---

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.1</b>	0.1	---
Nitration	Abs/cm *ASTM D7624 >20	<b>4.8</b>	5.6	---
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>17.6</b>	18.9	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>13.3</b>	14.1	---
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>9.3</b>	10.2	---







# OIL ANALYSIS REPORT

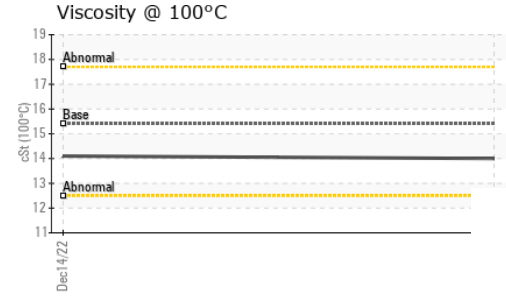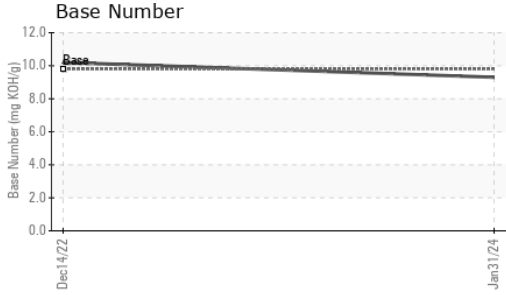

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.0</b>	14.1	---

## GRAPHS

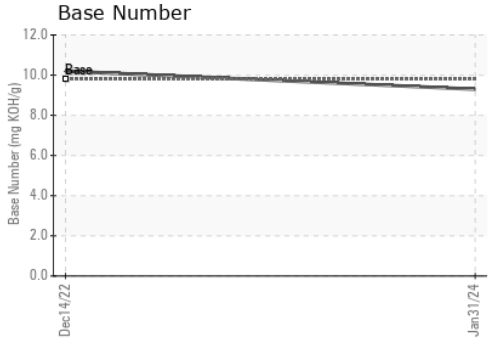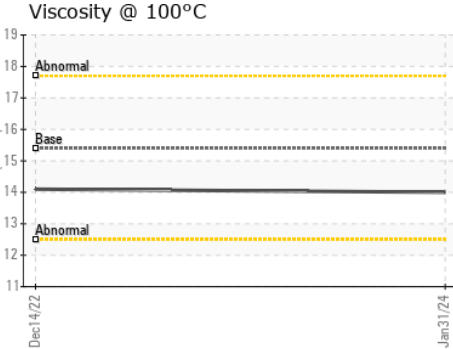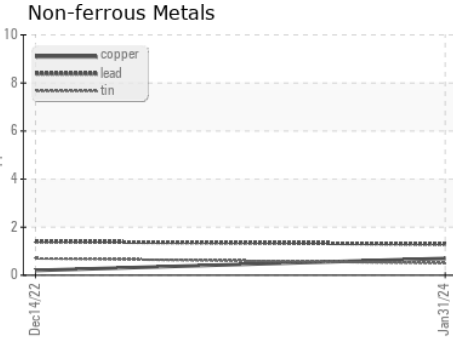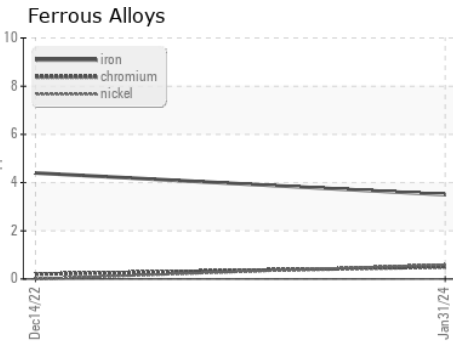

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0099266    **Recieved** : 02 Feb 2024  
 Lab Number : **06078807**    **Diagnosed** : 05 Feb 2024  
 Unique Number : 10860898    **Diagnostician** : Wes Davis  
 Test Package : FLEET

**GFL Environmental - 844 - Princeton Hauling**  
 10129 Highway 62 West  
 Princeton, KY  
 US 42445  
 Contact: ROBERT THIBAUT  
 robert.thibault@gflenv.com  
 T: (931)237-6045  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)