


# OIL ANALYSIS REPORT

## Sample Rating Trend

**NORMAL**

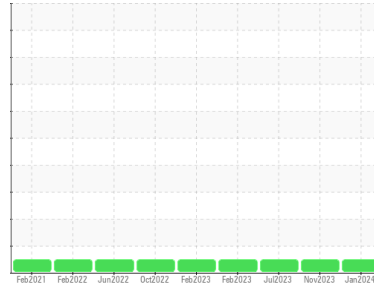

Machine Id  
**301121**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0117081</b>	PCA0110456	PCA0101327
Sample Date	Client Info			<b>26 Jan 2024</b>	02 Nov 2023	11 Jul 2023
Machine Age	mls Client Info			<b>33746</b>	32652	30086
Oil Age	mls Client Info			<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>29</b>	24	19
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>13</b>	12	8
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	1	0
Copper	ppm	ASTM D5185m	>330	<b>5</b>	3	4
Tin	ppm	ASTM D5185m	>15	<b>1</b>	1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>7</b>	11	10
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>61</b>	59	61
Manganese	ppm	ASTM D5185m	0	<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	950	<b>937</b>	921	857
Calcium	ppm	ASTM D5185m	1050	<b>1056</b>	1070	1116
Phosphorus	ppm	ASTM D5185m	995	<b>945</b>	1064	1018
Zinc	ppm	ASTM D5185m	1180	<b>1220</b>	1256	1160
Sulfur	ppm	ASTM D5185m	2600	<b>3193</b>	3120	3231

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>5</b>	4	4
Sodium	ppm	ASTM D5185m		<b>0</b>	<1	0
Potassium	ppm	ASTM D5185m	>20	<b>12</b>	10	8

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.4	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.6</b>	8.2	7.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.9</b>	18.9	18.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.0</b>	14.9	14.1
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.2</b>	9.0	9.0









# OIL ANALYSIS REPORT

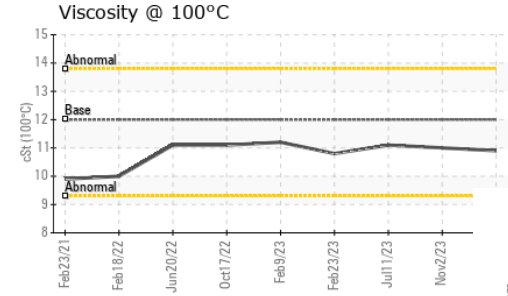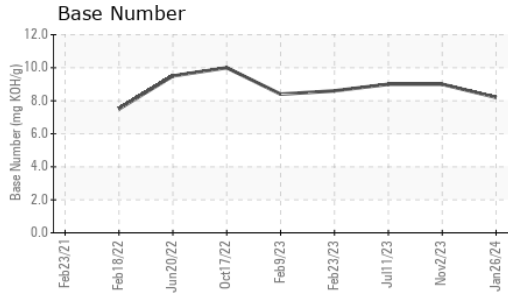

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	10.9	11.0

## GRAPHS

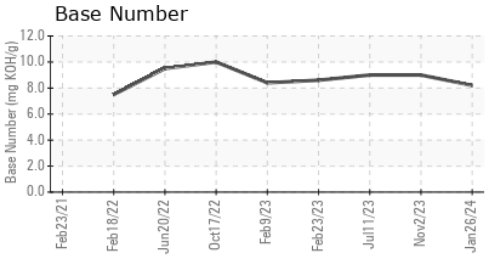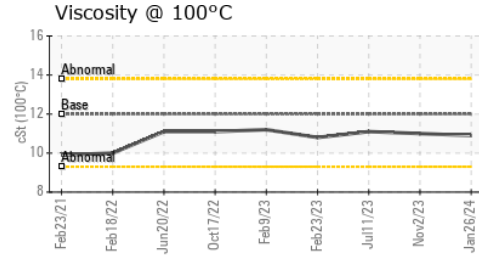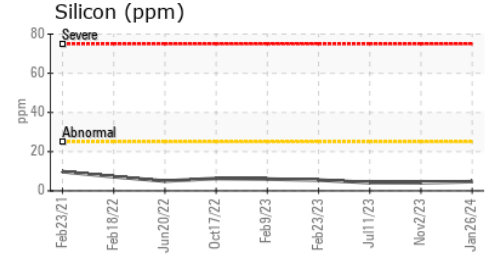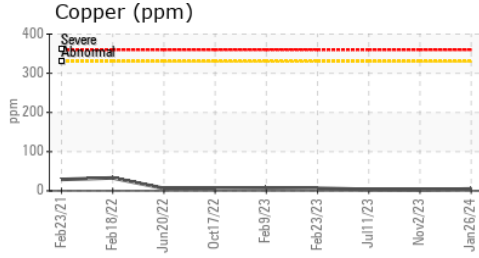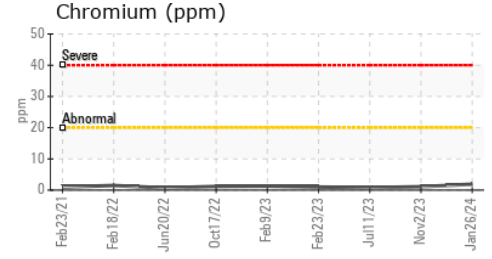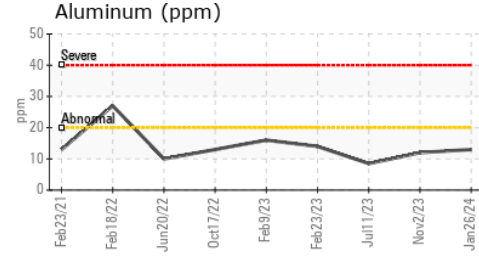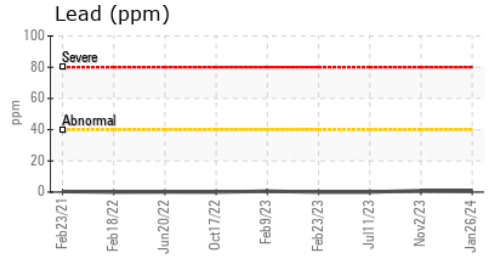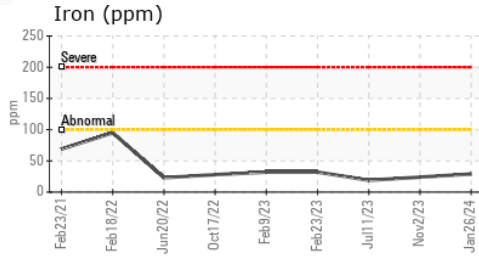

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0117081 **Recieved** : 02 Feb 2024  
**Lab Number** : 06078917 **Diagnosed** : 05 Feb 2024  
**Unique Number** : 10861008 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #119**  
 39 INDUSTRIAL AVE  
 HASBROUCK HEIGHTS, NJ  
 US 07604  
 Contact: MIKE LONGETTE  
 mlongette@millertransgroup.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: (201)528-7053