


Machine Id
542176

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

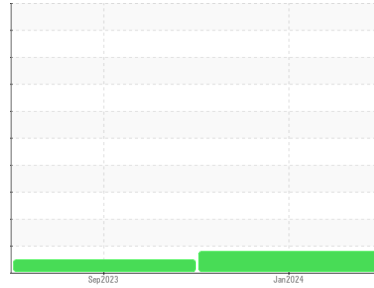

DIAGNOSIS

Recommendation
No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear
The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other metal levels are typical for a new component breaking in.

Contamination
There is no indication of any contamination in the oil.

Fluid Condition
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0117050	PCA0106252	---
Sample Date	Client Info		29 Jan 2024	16 Sep 2023	---
Machine Age	mls	Client Info	15723	7653	---
Oil Age	mls	Client Info	0	0	---
Oil Changed	Client Info		Not Chngd	Not Chngd	---
Sample Status			ABNORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	---
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	50	29	---
Chromium	ppm	ASTM D5185m >20	3	2	---
Nickel	ppm	ASTM D5185m >4	2	1	---
Titanium	ppm	ASTM D5185m	<1	<1	---
Silver	ppm	ASTM D5185m >3	1	2	---
Aluminum	ppm	ASTM D5185m >20	14	8	---
Lead	ppm	ASTM D5185m >40	<1	<1	---
Copper	ppm	ASTM D5185m >330	▲ 481	295	---
Tin	ppm	ASTM D5185m >15	5	5	---
Vanadium	ppm	ASTM D5185m	0	<1	---
Cadmium	ppm	ASTM D5185m	<1	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	28	35	---
Barium	ppm	ASTM D5185m 0	0	<1	---
Molybdenum	ppm	ASTM D5185m 50	44	43	---
Manganese	ppm	ASTM D5185m 0	5	4	---
Magnesium	ppm	ASTM D5185m 950	552	584	---
Calcium	ppm	ASTM D5185m 1050	1564	1807	---
Phosphorus	ppm	ASTM D5185m 995	757	861	---
Zinc	ppm	ASTM D5185m 1180	970	1092	---
Sulfur	ppm	ASTM D5185m 2600	2330	2702	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	9	6	---
Sodium	ppm	ASTM D5185m	<1	2	---
Potassium	ppm	ASTM D5185m >20	54	19	---




INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	1.2	0.7	---
Nitration	Abs/cm	*ASTM D7624 >20	10.6	7.8	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	24.2	22.9	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	22.3	20.4	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.1	8.9	---









OIL ANALYSIS REPORT

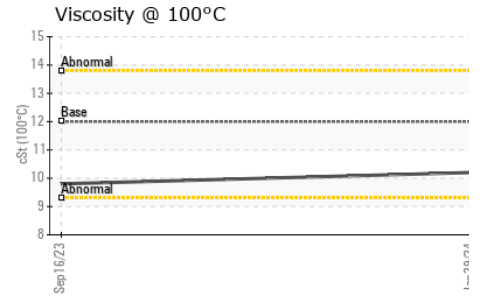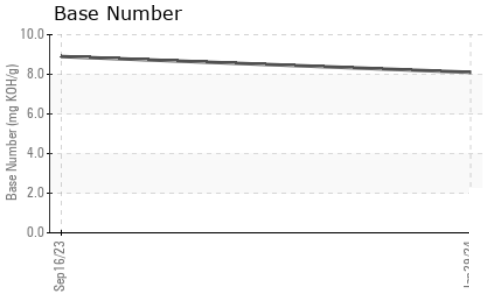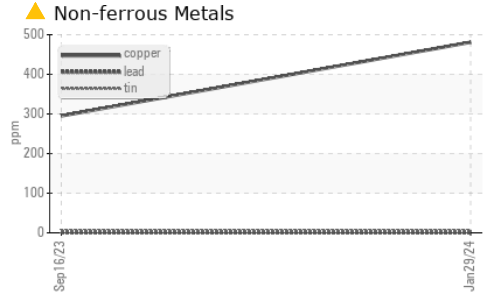

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	10.2	9.8

GRAPHS

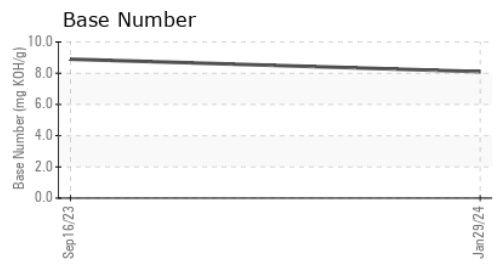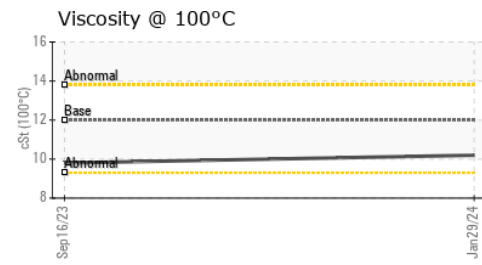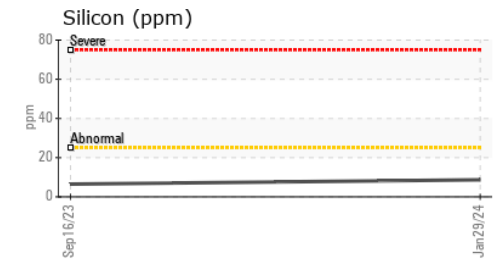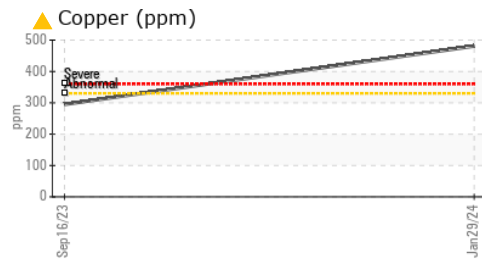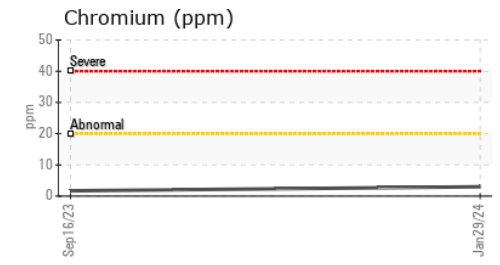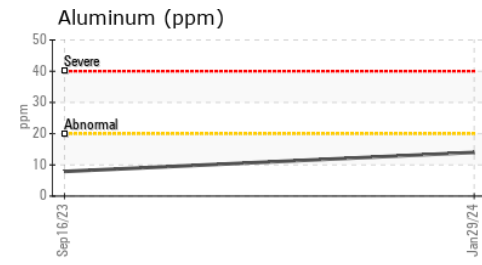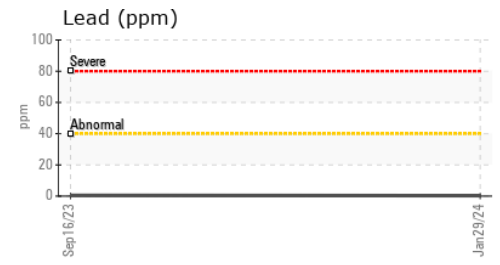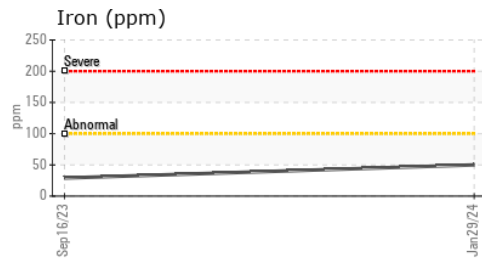

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0117050 **Received** : 02 Feb 2024
Lab Number : 06078919 **Tested** : 06 Feb 2024
Unique Number : 10861010 **Diagnosed** : 06 Feb 2024 - Jonathan Hester
Test Package : MOB 1 (Additional Tests: TBN)

MILLER TRUCK LEASING #119
 39 INDUSTRIAL AVE
 HASBROUCK HEIGHTS, NJ
 US 07604
 Contact: MIKE LONGETTE
 mlongette@millertransgroup.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (201)528-7053