




Machine Id
FREIGHTLINER 684390
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (40 QTS)

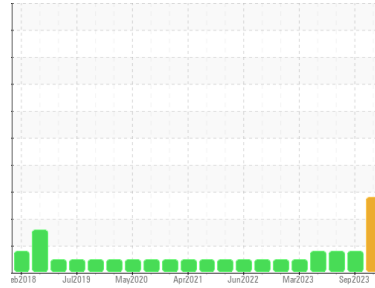

DIAGNOSIS

Recommendation
 We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear
 All component wear rates are normal.

Contamination
 There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0117040	PCA0106240	PCA0095931
Sample Date	Client Info		20 Jan 2024	15 Sep 2023	10 Jun 2023
Machine Age	mls	Client Info	0	446844	0
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	Not Changd	N/A
Sample Status			SEVERE	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	21	73	83
Chromium	ppm	ASTM D5185m >20	<1	8	8
Nickel	ppm	ASTM D5185m >2	0	<1	<1
Titanium	ppm	ASTM D5185m >2	<1	<1	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >30	12	47	66
Lead	ppm	ASTM D5185m >30	0	<1	<1
Copper	ppm	ASTM D5185m >30	2	6	9
Tin	ppm	ASTM D5185m >15	<1	<1	2
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	43	0	5
Barium	ppm	ASTM D5185m 0	2	0	0
Molybdenum	ppm	ASTM D5185m 50	16	69	77
Manganese	ppm	ASTM D5185m 0	<1	1	2
Magnesium	ppm	ASTM D5185m 950	187	951	1019
Calcium	ppm	ASTM D5185m 1050	877	1085	1189
Phosphorus	ppm	ASTM D5185m 995	548	1021	1061
Zinc	ppm	ASTM D5185m 1180	578	1258	1365
Sulfur	ppm	ASTM D5185m 2600	1616	2995	3288

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	5	7	9
Sodium	ppm	ASTM D5185m	3	3	5
Potassium	ppm	ASTM D5185m >20	8	24	22
Fuel	%	ASTM D3524 >3.0	53.2	<1.0	<1.0

INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.3	1.1	2
Nitration	Abs/cm	*ASTM D7624 >20	7.8	9.9	12.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.8	21.3	26.4

FLUID DEGRADATION


	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	18.0	17.1	21.8
Base Number (BN)	mg KOH/g	ASTM D2896	4.3	7.1	5.1

OIL ANALYSIS REPORT


Fuel Dilution

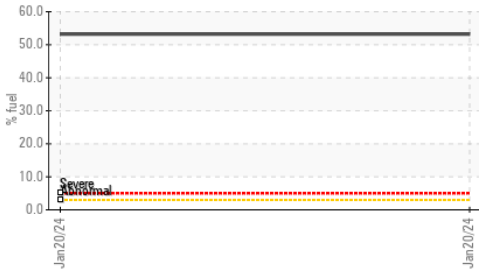

Viscosity @ 100°C

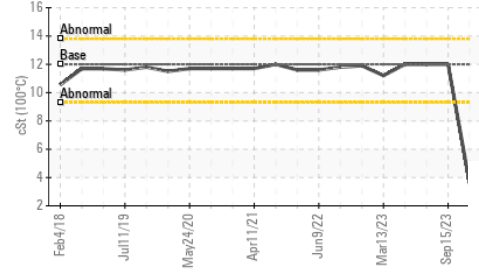

Base Number

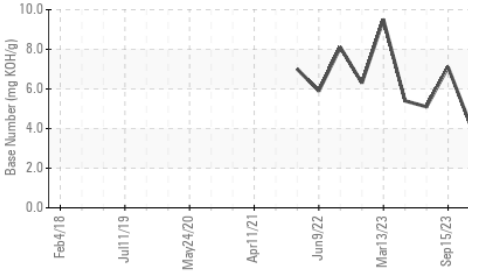


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	3.6	12.0

GRAPHS


Iron (ppm)

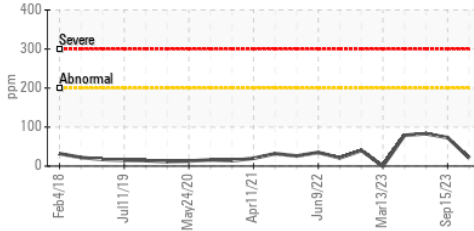


Lead (ppm)

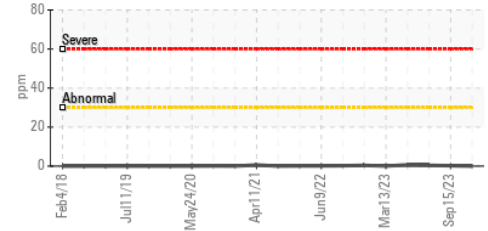


Aluminum (ppm)

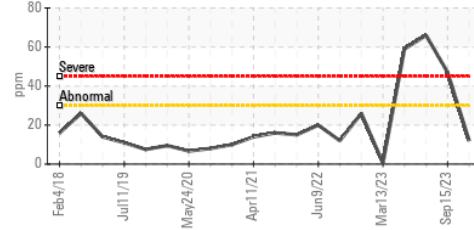


Chromium (ppm)

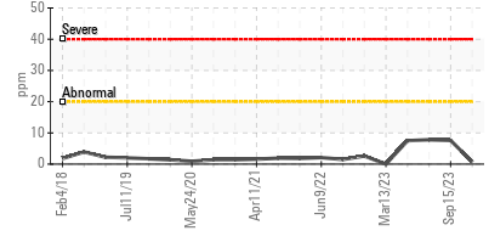


Copper (ppm)

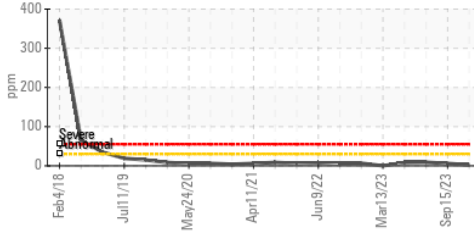


Silicon (ppm)

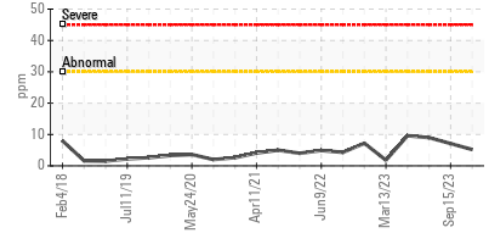

Viscosity @ 100°C

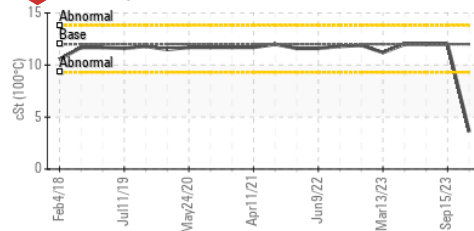

Base Number

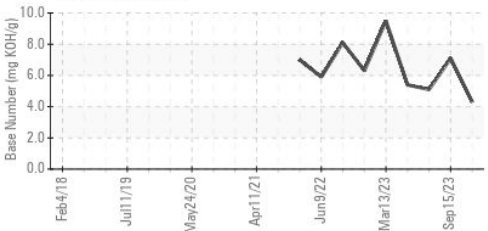

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0117040 **Received** : 02 Feb 2024
Lab Number : 06078926 **Tested** : 07 Feb 2024
Unique Number : 10861017 **Diagnosed** : 07 Feb 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, TBN)

MILLER TRUCK LEASING #119
 39 INDUSTRIAL AVE
 HASBROUCK HEIGHTS, NJ
 US 07604
 Contact: MIKE LONGETTE
 mlongette@millertransgroup.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: (201)528-7053