


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

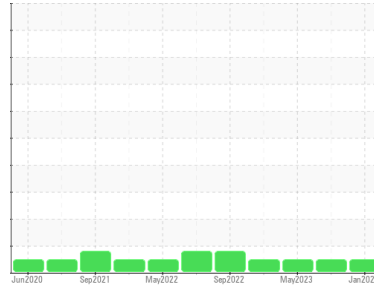

Machine Id  
**598036**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0117035</b>	PCA0106257	PCA0098078
Sample Date	Client Info			<b>25 Jan 2024</b>	22 Sep 2023	25 May 2023
Machine Age	mls Client Info			<b>309421</b>	289310	0
Oil Age	mls Client Info			<b>0</b>	0	0
Oil Changed	Client Info			<b>Not Chngd</b>	Changed	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>16</b>	12	25
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	2
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>16</b>	11	17
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>330	<b>4</b>	4	8
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>2</b>	0	9
Barium	ppm	ASTM D5185m	0	<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>63</b>	64	63
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m	950	<b>967</b>	1092	974
Calcium	ppm	ASTM D5185m	1050	<b>1122</b>	1147	1219
Phosphorus	ppm	ASTM D5185m	995	<b>1140</b>	1179	1076
Zinc	ppm	ASTM D5185m	1180	<b>1224</b>	1499	1374
Sulfur	ppm	ASTM D5185m	2600	<b>3456</b>	3500	3634

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>7</b>	4	7
Sodium	ppm	ASTM D5185m		<b>0</b>	0	2
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	5	10

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.9</b>	0.9	1.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.9</b>	7.4	9.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.1</b>	19.3	22.7

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.5</b>	14.2	18.2
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.4</b>	8.5	6.7









# OIL ANALYSIS REPORT

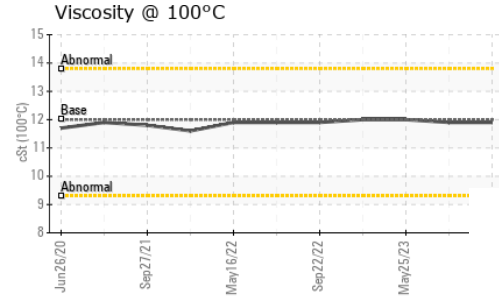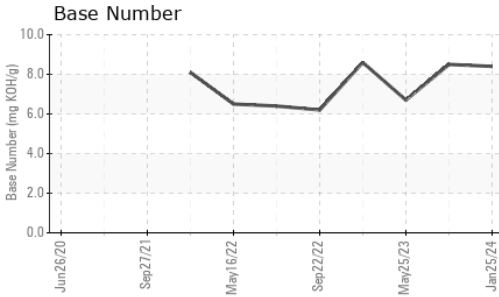

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.9	12.0

## GRAPHS

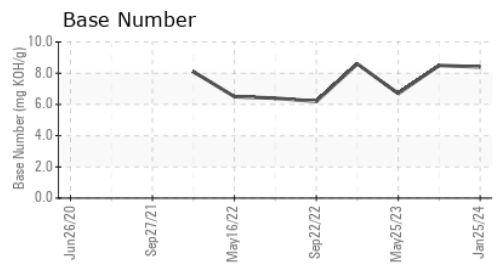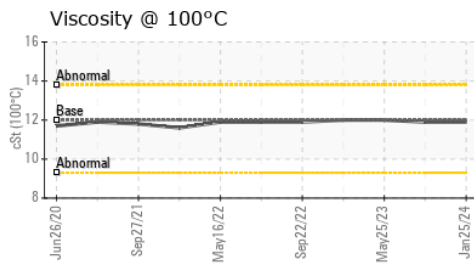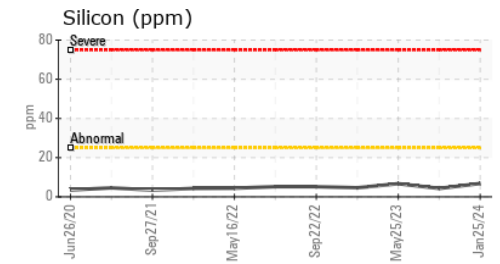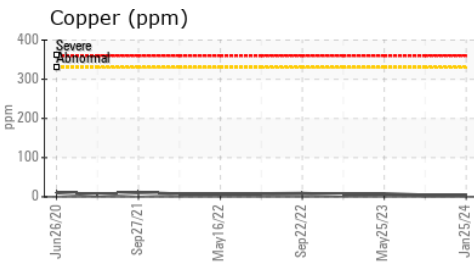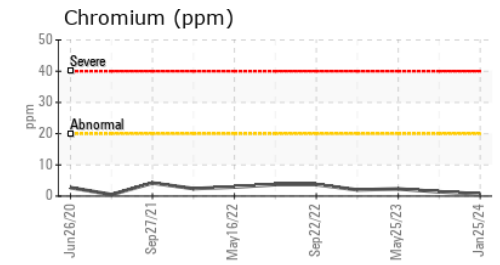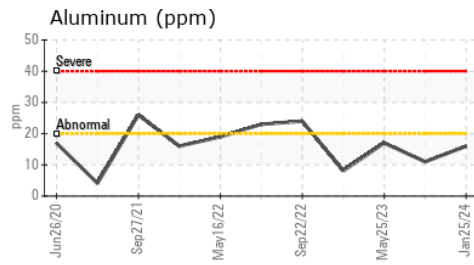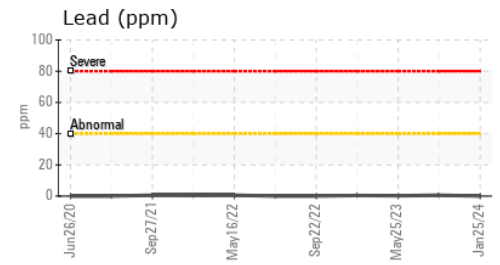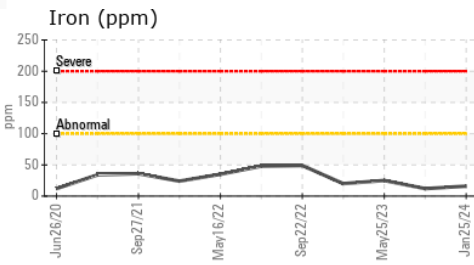

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0117035 **Recieved** : 02 Feb 2024  
**Lab Number** : 06078942 **Diagnosed** : 05 Feb 2024  
**Unique Number** : 10861033 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #119**  
 39 INDUSTRIAL AVE  
 HASBROUCK HEIGHTS, NJ  
 US 07604  
 Contact: MIKE LONGETTE  
 mlongette@millertransgroup.com  
 T:  
 F: (201)528-7053

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)