


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

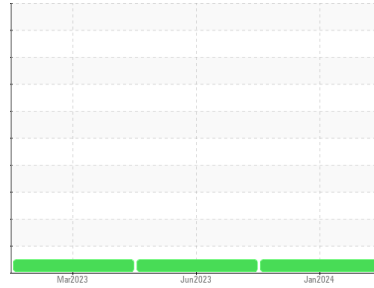

Area  
**(16043Z) Walgreens - Tractor**  
 Machine Id  
**[Walgreens - Tractor] 136A61392**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0093956</b>	PCA0093851	PCA0093916
Sample Date	Client Info	<b>07 Jan 2024</b>	12 Jun 2023	08 Mar 2023
Machine Age	mls Client Info	<b>434100</b>	383860	351682
Oil Age	mls Client Info	<b>434100</b>	383860	0
Oil Changed	Client Info	<b>N/A</b>	Not Changd	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	<b>9</b>	14	17
Chromium	ppm ASTM D5185m >5	<b>0</b>	3	3
Nickel	ppm ASTM D5185m >2	<b>0</b>	<1	0
Titanium	ppm ASTM D5185m	<b>4</b>	3	1
Silver	ppm ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm ASTM D5185m >30	<b>3</b>	10	13
Lead	ppm ASTM D5185m >30	<b>&lt;1</b>	1	0
Copper	ppm ASTM D5185m >150	<b>&lt;1</b>	4	5
Tin	ppm ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	<b>9</b>	6	2
Barium	ppm ASTM D5185m 0	<b>0</b>	4	0
Molybdenum	ppm ASTM D5185m 50	<b>54</b>	61	59
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	1	1
Magnesium	ppm ASTM D5185m 950	<b>918</b>	1018	955
Calcium	ppm ASTM D5185m 1050	<b>1041</b>	1178	1132
Phosphorus	ppm ASTM D5185m 995	<b>1049</b>	1041	956
Zinc	ppm ASTM D5185m 1180	<b>1241</b>	1300	1283
Sulfur	ppm ASTM D5185m 2600	<b>3210</b>	3411	2794

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>6</b>	3	4
Sodium	ppm ASTM D5185m	<b>&lt;1</b>	2	2
Potassium	ppm ASTM D5185m >20	<b>8</b>	19	25



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.2</b>	0.5	0.6
Nitration	Abs/cm *ASTM D7624 >20	<b>6.3</b>	8.5	8.7
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.0</b>	20.4	21.0

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>14.0</b>	16.3	17.2
Base Number (BN)	mg KOH/g ASTM D2896	<b>8.5</b>	7.5	6.7





# OIL ANALYSIS REPORT

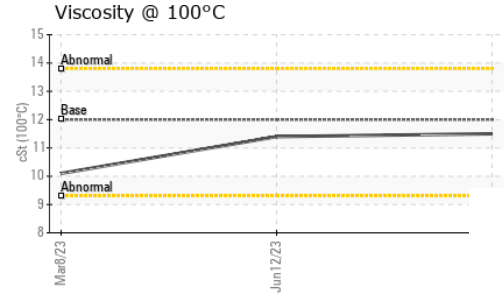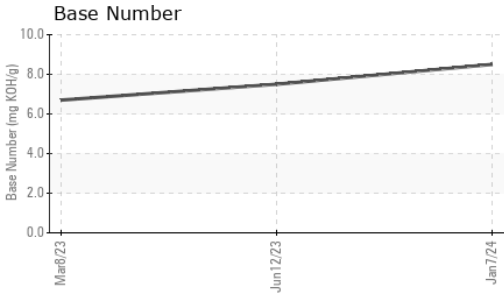

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.5</b>	11.4	10.1

## GRAPHS

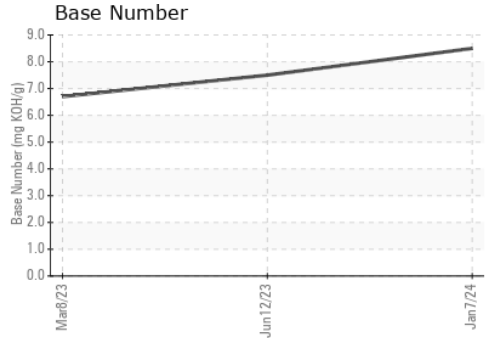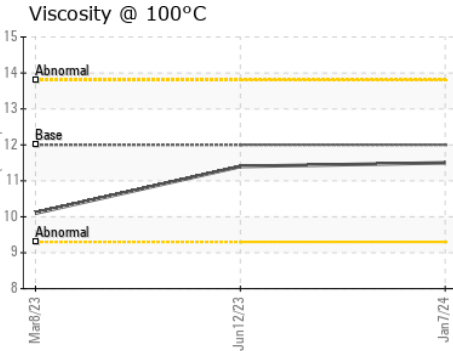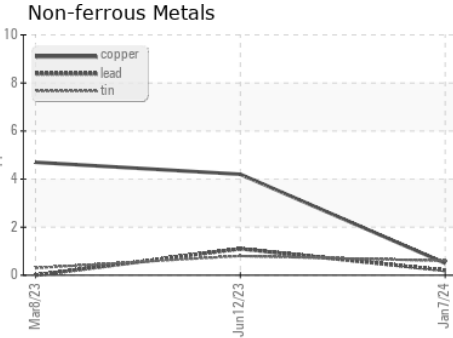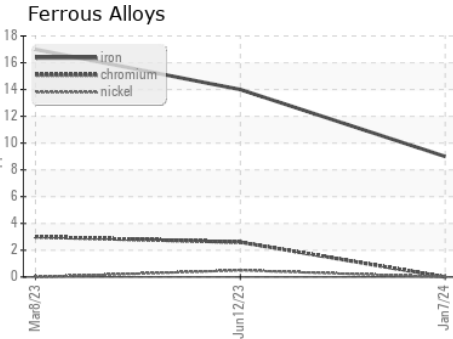

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0093956 **Received** : 02 Feb 2024  
**Lab Number** : **06078991** **Diagnosed** : 05 Feb 2024  
**Unique Number** : 10861082 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1372 - Berkeley-Moreno Valley**  
 17500 Perris Blvd.  
 Moreno Valley, CA  
 US 92551  
 Contact: Ryan Cruz  
 rcruz@transervice.com  
 T: (951)924-7131  
 F: (951)924-7151

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)