


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
KOMATSU HD605-7 LB-64 (S/N 10877)
Component
Hydraulic System
Fluid
PETRO CANADA HYDREX MV 32 (32 GAL)

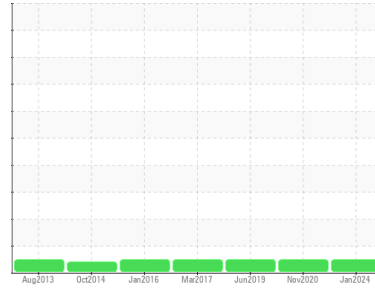

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0110078	WCDB2670	WCDB2856
Sample Date	Client Info		16 Jan 2024	12 Nov 2020	06 Jun 2019
Machine Age	hrs	Client Info	15561	12276	11277
Oil Age	hrs	Client Info	1983	999	2712
Oil Changed	Client Info		Changed	Not Changd	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<1	2	2
Chromium	ppm	ASTM D5185m >10	<1	<1	<1
Nickel	ppm	ASTM D5185m >10	<1	0	<1
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m	<1	0	0
Aluminum	ppm	ASTM D5185m >10	2	0	1
Lead	ppm	ASTM D5185m >10	2	0	1
Copper	ppm	ASTM D5185m >75	2	<1	<1
Tin	ppm	ASTM D5185m >10	<1	<1	0
Antimony	ppm	ASTM D5185m	---	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<1	<1
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	<1	<1	<1
Manganese	ppm	ASTM D5185m	2	0	<1
Magnesium	ppm	ASTM D5185m	5	<1	0
Calcium	ppm	ASTM D5185m	59	63	74
Phosphorus	ppm	ASTM D5185m	329	337	311
Zinc	ppm	ASTM D5185m	435	405	374
Sulfur	ppm	ASTM D5185m	869	790	664





CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	5	3	5
Sodium	ppm	ASTM D5185m	3	0	<1
Potassium	ppm	ASTM D5185m >20	4	0	<1

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	429	1259	1552
Particles >6µm	ASTM D7647	>1300	92	210	289
Particles >14µm	ASTM D7647	>160	8	13	15
Particles >21µm	ASTM D7647	>40	2	3	1
Particles >38µm	ASTM D7647	>10	0	0	0
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	16/14/10	17/15/11	18/15/11

OIL ANALYSIS REPORT

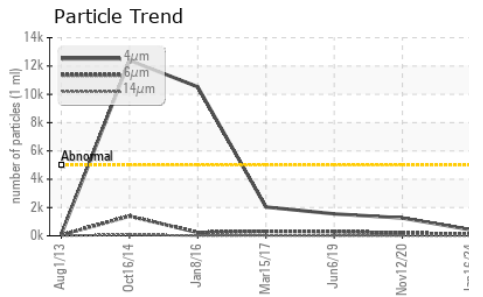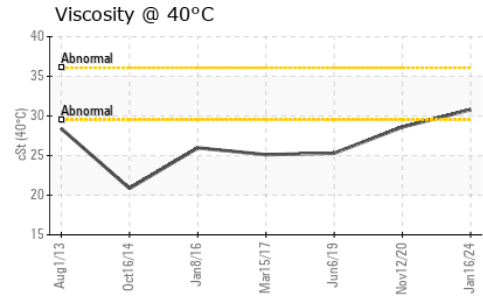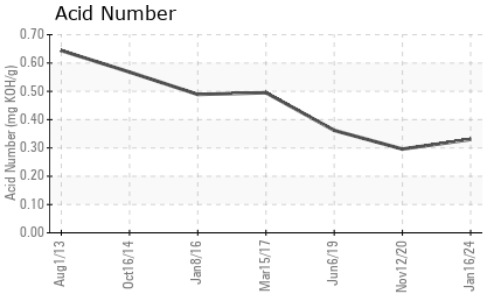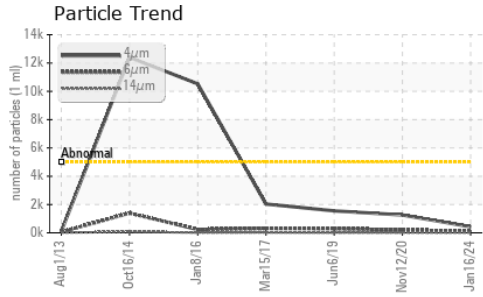


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.33	0.296	0.362






VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		30.8	28.6	25.3

SAMPLE IMAGES

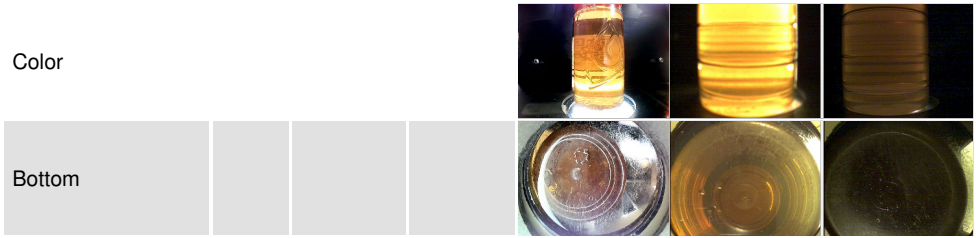

GRAPHS

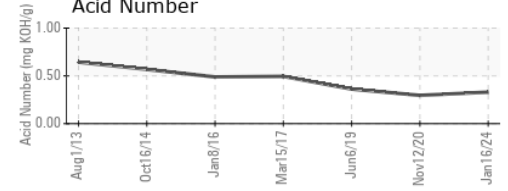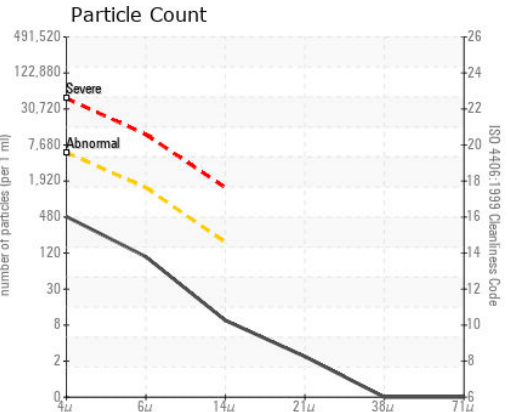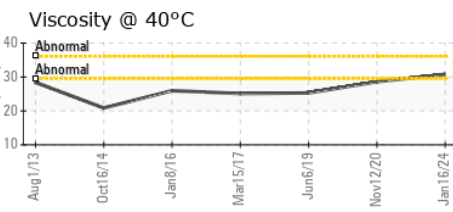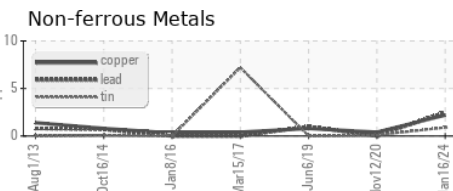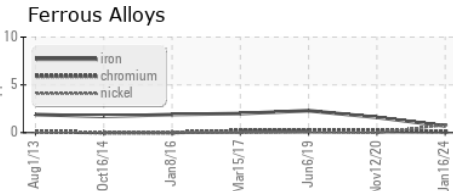

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0110078
Lab Number : **06079072**
Unique Number : 10861163
Test Package : MOB 2
Received : 02 Feb 2024
Tested : 05 Feb 2024
Diagnosed : 06 Feb 2024 - Jonathan Hester

LORUSSO BRISTOL STONE CORP
 611 PLEASANT ST
 WEYMOUTH, MA
 US 02189
 Contact: PAUL MOGAN
 lbstone611@comcast.net
 T: (781)331-5379
 F: (781)337-8274

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)