


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
KOMATSU HD605-7 LB-64 (S/N 10877)
 Component
Left Planetary
 Fluid
KENDALL SUPER-D 3 SAE 30 (6 GAL)

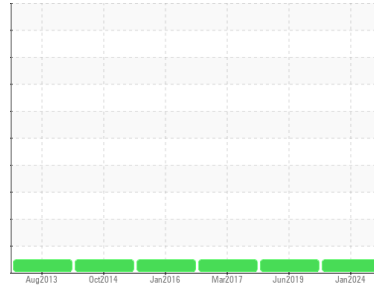

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0110086	WCDB2851	WCM2280356
Sample Date	Client Info		16 Jan 2024	06 Jun 2019	15 Mar 2017
Machine Age	hrs	Client Info	15561	11277	8565
Oil Age	hrs	Client Info	1983	2712	1774
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	17	30	25
Chromium	ppm	ASTM D5185m >10	<1	<1	<1
Nickel	ppm	ASTM D5185m >10	<1	0	<1
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m	<1	0	0
Aluminum	ppm	ASTM D5185m >25	1	<1	2
Lead	ppm	ASTM D5185m >25	0	<1	1
Copper	ppm	ASTM D5185m >75	<1	<1	2
Tin	ppm	ASTM D5185m >10	<1	<1	2
Antimony	ppm	ASTM D5185m >5	---	2	0
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	7	<1	<1
Barium	ppm	ASTM D5185m	0	0	<1
Molybdenum	ppm	ASTM D5185m	<1	<1	<1
Manganese	ppm	ASTM D5185m	<1	<1	2
Magnesium	ppm	ASTM D5185m	25	18	6
Calcium	ppm	ASTM D5185m	2634	2102	2230
Phosphorus	ppm	ASTM D5185m	985	983	993
Zinc	ppm	ASTM D5185m 1330	1155	1165	1110
Sulfur	ppm	ASTM D5185m	4487	3214	1383



CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	15	7	13
Sodium	ppm	ASTM D5185m	1	1	2
Potassium	ppm	ASTM D5185m >20	0	<1	2

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.44	1.625	1.55

OIL ANALYSIS REPORT







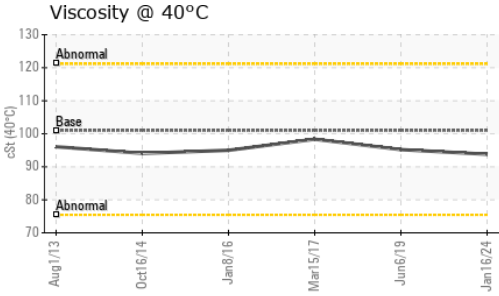
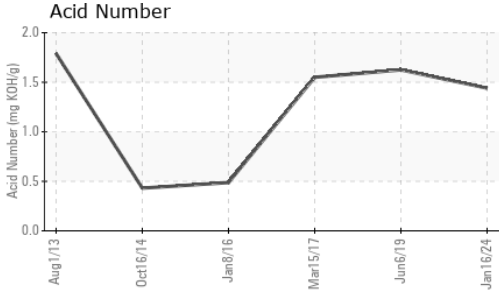


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 101	93.8	95.2	98.35

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

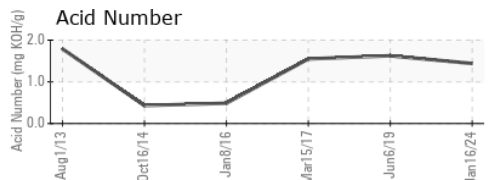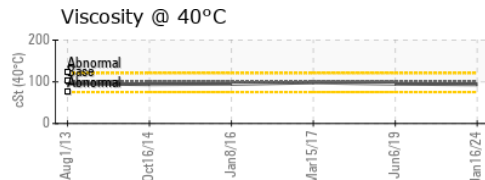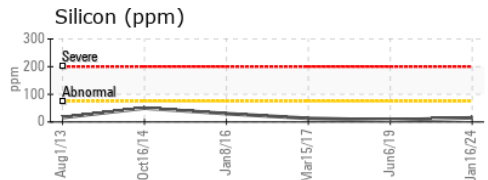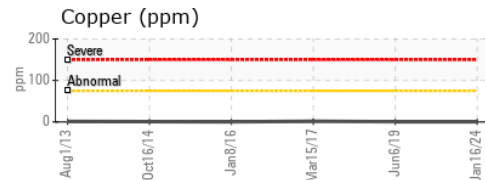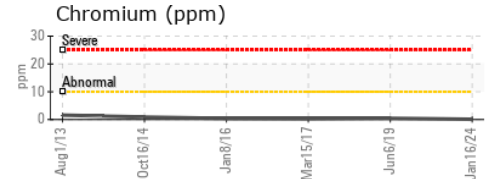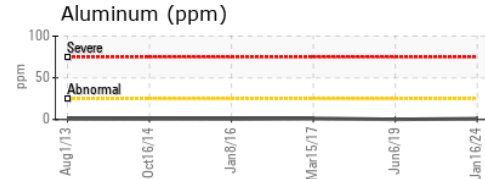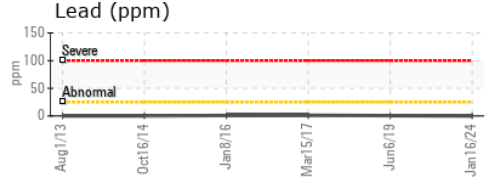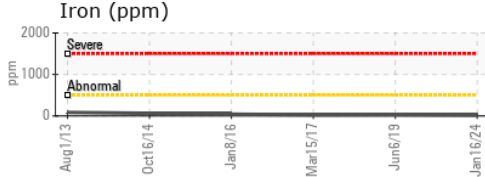

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0110086 **Recieved** : 02 Feb 2024
Lab Number : 06079218 **Diagnosed** : 05 Feb 2024
Unique Number : 10861309 **Diagnostician** : Wes Davis
Test Package : MOB 2

LORUSSO BRISTOL STONE CORP
 611 PLEASANT ST
 WEYMOUTH, MA
 US 02189
 Contact: PAUL MOGAN
 lbstone611@comcast.net
 T: (781)331-5379
 F: (781)337-8274

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)