


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**LIEBHERR L586 LB-51 (S/N 024947)**  
 Component  
**Diesel Engine**  
 Fluid  
**FLEETLINE SUPERFLEET XHD 15W40 (11 GAL)**

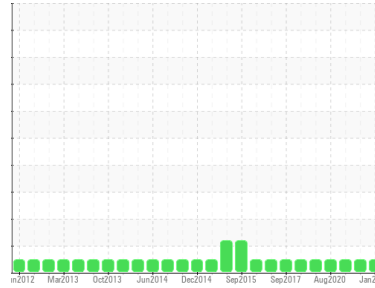

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0110120</b>	WC0570166	WC0569655
Sample Date	Client Info		<b>09 Jan 2024</b>	02 Oct 2021	14 Jul 2021
Machine Age	hrs	Client Info	<b>12510</b>	8947	8435
Oil Age	hrs	Client Info	<b>283</b>	251	258
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>&lt;1</b>	3	5
Chromium	ppm	ASTM D5185m >5	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >15	<b>1</b>	0	3
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m >125	<b>0</b>	1	3
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>26</b>	7	293
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>38</b>	62	104
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	1
Magnesium	ppm	ASTM D5185m	<b>123</b>	936	626
Calcium	ppm	ASTM D5185m	<b>1824</b>	1046	1450
Phosphorus	ppm	ASTM D5185m	<b>935</b>	1054	690
Zinc	ppm	ASTM D5185m	<b>1094</b>	1149	759
Sulfur	ppm	ASTM D5185m	<b>3541</b>	2708	2125

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >60	<b>4</b>	3	7
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	1	34
Potassium	ppm	ASTM D5185m >20	<b>2</b>	<1	0



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.8</b>	5.6	6.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>16.1</b>	17.5	23.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>10.4</b>	13.3	17.1
Base Number (BN)	mg KOH/g	ASTM D2896	<b>9.24</b>	9.86	9.43









# OIL ANALYSIS REPORT

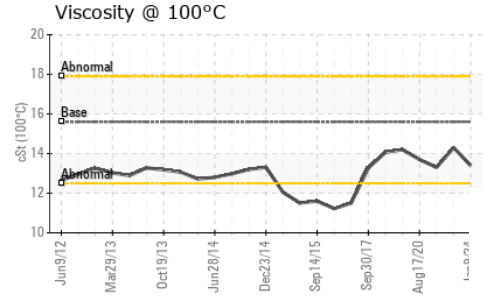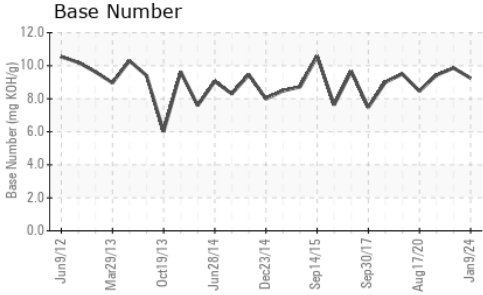

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.6	<b>13.4</b>	14.3	13.3

## GRAPHS

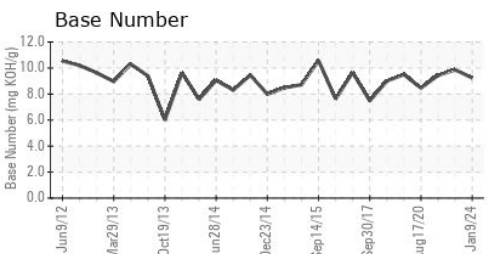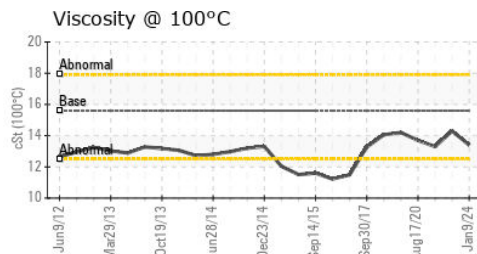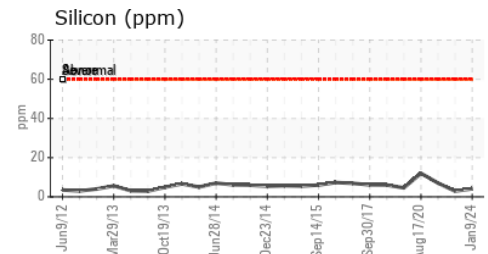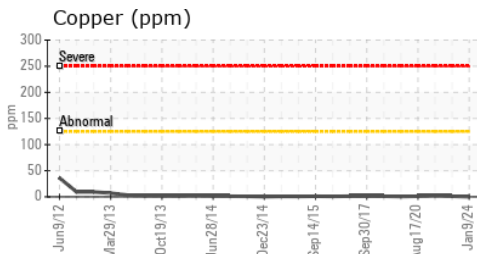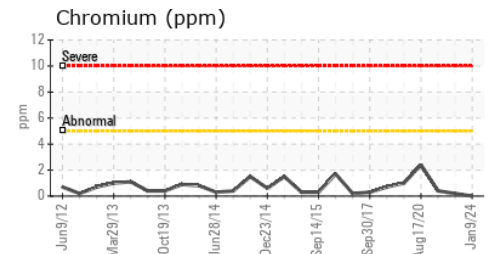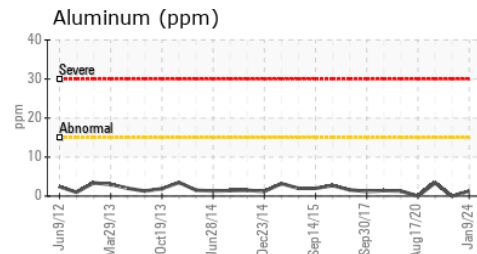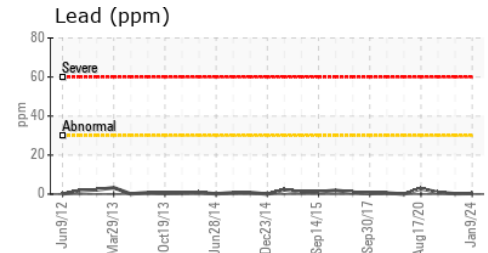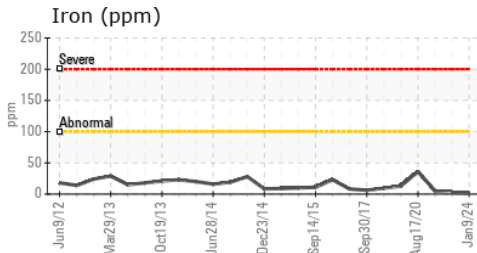

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0110120 **Received** : 02 Feb 2024  
**Lab Number** : **06079262** **Tested** : 06 Feb 2024  
**Unique Number** : 10861353 **Diagnosed** : 06 Feb 2024 - Wes Davis  
**Test Package** : MOB 2

**LORUSSO BRISTOL STONE CORP**  
 611 PLEASANT ST  
 WEYMOUTH, MA  
 US 02189  
 Contact: PAUL MOGAN  
 lbstone611@comcast.net  
 T: (781)331-5379  
 F: (781)337-8274

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)