




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**420087 - SW4007**  
Component  
**Transmission (Auto)**  
Fluid  
**DEXRON III (--- GAL)**

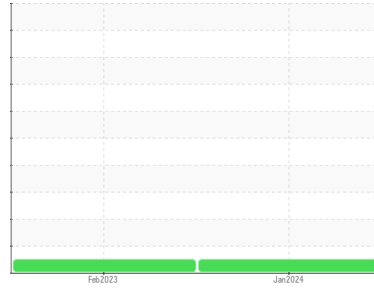

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Transmission )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0105478</b>	GFL0065823	---
Sample Date	Client Info		<b>31 Jan 2024</b>	18 Feb 2023	---
Machine Age	mls	Client Info	<b>175048</b>	155874	---
Oil Age	mls	Client Info	<b>175048</b>	0	---
Oil Changed	Client Info		<b>Changed</b>	N/A	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >160	<b>41</b>	87	---
Chromium	ppm	ASTM D5185m >5	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m >5	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m	<b>0</b>	0	---
Silver	ppm	ASTM D5185m >5	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >50	<b>10</b>	23	---
Lead	ppm	ASTM D5185m >50	<b>4</b>	12	---
Copper	ppm	ASTM D5185m >225	<b>9</b>	25	---
Tin	ppm	ASTM D5185m >10	<b>2</b>	4	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>125</b>	84	---
Barium	ppm	ASTM D5185m	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	<b>0</b>	<1	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	1	---
Magnesium	ppm	ASTM D5185m	<b>1</b>	0	---
Calcium	ppm	ASTM D5185m	<b>125</b>	22	---
Phosphorus	ppm	ASTM D5185m	<b>454</b>	199	---
Zinc	ppm	ASTM D5185m	<b>12</b>	22	---
Sulfur	ppm	ASTM D5185m	<b>2530</b>	1243	---

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>4</b>	5	---
Sodium	ppm	ASTM D5185m	<b>4</b>	5	---
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	---

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual	<b>NEG</b>	NEG	---



# OIL ANALYSIS REPORT



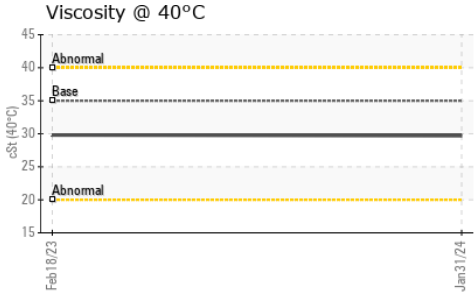


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	35.0	29.7	29.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

## GRAPHS

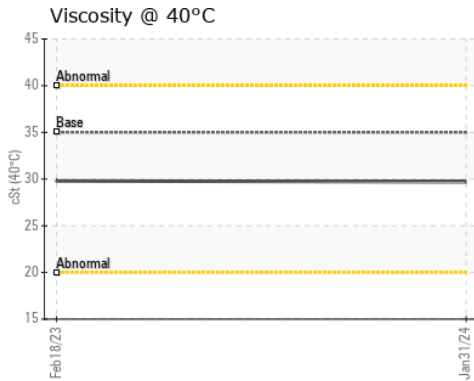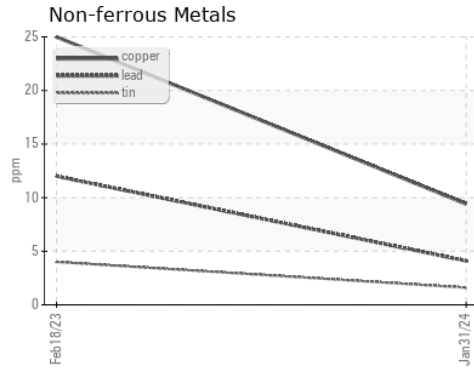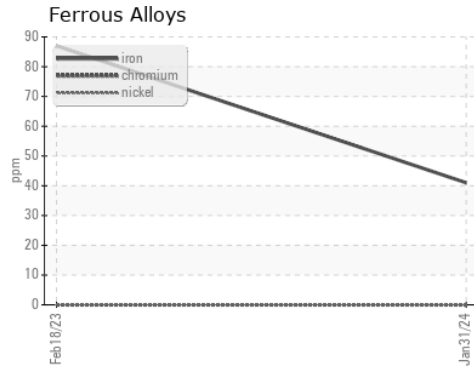

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0105478  
**Lab Number** : 06080305  
**Unique Number** : 10862396  
**Test Package** : FLEET

**Received** : 05 Feb 2024  
**Tested** : 07 Feb 2024  
**Diagnosed** : 07 Feb 2024 - Don Baldrige

**GFL Environmental - 983 - Sugar Land Hauling**  
 16011 West Belfort Street  
 Sugar Land, TX  
 US 77498  
 Contact: Adrian Martinez  
 adrianmartinez@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: