




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

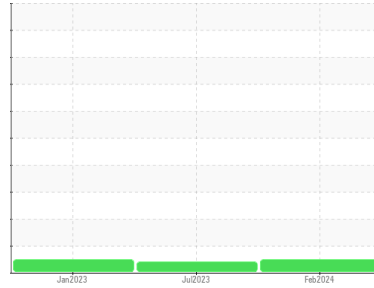

Machine Id  
**731125**

Component  
**Transmission (Auto)**

Fluid  
**PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0109814</b>  | GFL0083748  | GFL0070260  |
| Sample Date   | Client Info |             | <b>01 Feb 2024</b> | 07 Jul 2023 | 25 Jan 2023 |
| Machine Age   | hrs         | Client Info | <b>6799</b>        | 5633        | 4279        |
| Oil Age       | hrs         | Client Info | <b>0</b>           | 5633        | 4279        |
| Oil Changed   | Client Info |             | <b>Not Changed</b> | Not Changd  | Not Changed |
| Sample Status |             |             | <b>NORMAL</b>      | ABNORMAL    | NORMAL      |

## CONTAMINATION

|       | method    | limit/base | current    | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.1       | <b>NEG</b> | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base       | current    | history1 | history2 |
|----------|--------|------------------|------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >160 | <b>119</b> | 98       | 105      |
| Chromium | ppm    | ASTM D5185m >5   | <b>0</b>   | <1       | <1       |
| Nickel   | ppm    | ASTM D5185m >5   | <b>0</b>   | 0        | <1       |
| Titanium | ppm    | ASTM D5185m      | <b>0</b>   | 0        | 0        |
| Silver   | ppm    | ASTM D5185m >5   | <b>0</b>   | 0        | 0        |
| Aluminum | ppm    | ASTM D5185m >50  | <b>33</b>  | 24       | 22       |
| Lead     | ppm    | ASTM D5185m >50  | <b>7</b>   | 2        | 8        |
| Copper   | ppm    | ASTM D5185m >225 | <b>11</b>  | 7        | 9        |
| Tin      | ppm    | ASTM D5185m >10  | <b>3</b>   | <1       | 2        |
| Vanadium | ppm    | ASTM D5185m      | <b>0</b>   | 0        | 0        |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>   | 0        | 0        |

## ADDITIVES

|            | method | limit/base  | current      | history1 | history2 |
|------------|--------|-------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m | <b>74</b>    | 77       | 87       |
| Barium     | ppm    | ASTM D5185m | <b>0</b>     | 0        | 0        |
| Molybdenum | ppm    | ASTM D5185m | <b>&lt;1</b> | 2        | 1        |
| Manganese  | ppm    | ASTM D5185m | <b>3</b>     | 2        | 4        |
| Magnesium  | ppm    | ASTM D5185m | <b>0</b>     | 6        | 0        |
| Calcium    | ppm    | ASTM D5185m | <b>65</b>    | 74       | 55       |
| Phosphorus | ppm    | ASTM D5185m | <b>262</b>   | 260      | 257      |
| Zinc       | ppm    | ASTM D5185m | <b>0</b>     | 12       | 0        |
| Sulfur     | ppm    | ASTM D5185m | <b>1051</b>  | 1171     | 808      |

## CONTAMINANTS


|           | method | limit/base      | current   | history1 | history2 |
|-----------|--------|-----------------|-----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >20 | <b>6</b>  | 5        | 6        |
| Sodium    | ppm    | ASTM D5185m     | <b>21</b> | 14       | 11       |
| Potassium | ppm    | ASTM D5185m >20 | <b>4</b>  | <1       | 3        |

## VISUAL

|                  | method | limit/base    | current      | history1 | history2 |
|------------------|--------|---------------|--------------|----------|----------|
| White Metal      | scalar | *Visual NONE  | <b>NONE</b>  | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual NONE  | <b>NONE</b>  | NONE     | NONE     |
| Precipitate      | scalar | *Visual NONE  | <b>NONE</b>  | NONE     | NONE     |
| Silt             | scalar | *Visual NONE  | <b>NONE</b>  | NONE     | NONE     |
| Debris           | scalar | *Visual NONE  | <b>NONE</b>  | ▲ MODER  | NONE     |
| Sand/Dirt        | scalar | *Visual NONE  | <b>NONE</b>  | NONE     | NONE     |
| Appearance       | scalar | *Visual NORML | <b>NORML</b> | NORML    | NORML    |
| Odor             | scalar | *Visual NORML | <b>NORML</b> | NORML    | NORML    |
| Emulsified Water | scalar | *Visual >0.1  | <b>NEG</b>   | NEG      | NEG      |
| Free Water       | scalar | *Visual       | <b>NEG</b>   | NEG      | NEG      |



# OIL ANALYSIS REPORT



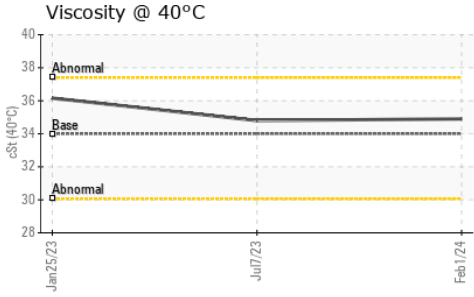


| FLUID PROPERTIES | method | limit/base   | current     | history1 | history2 |
|------------------|--------|--------------|-------------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445 34 | <b>34.9</b> | 34.8     | 36.16    |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

|        |  |  |          |          |          |
|--------|--|--|----------|----------|----------|
| Color  |  |  | no image | no image | no image |
| Bottom |  |  | no image | no image | no image |

## GRAPHS

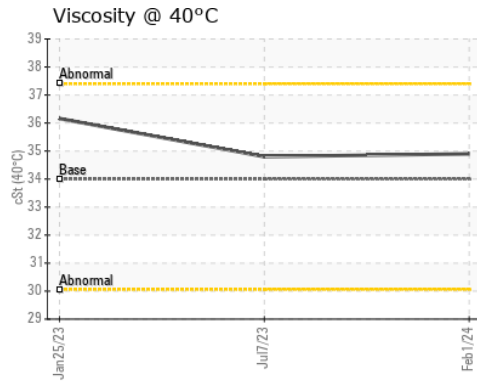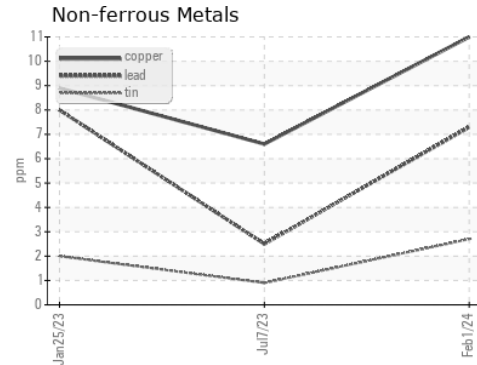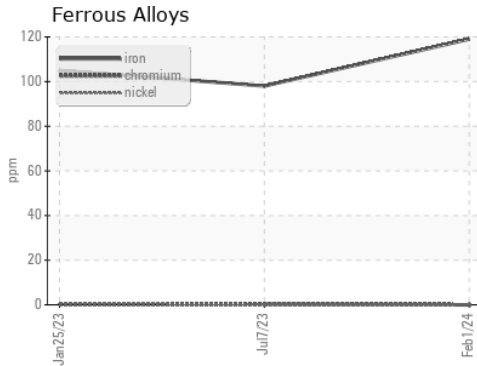

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0109814 **Received** : 05 Feb 2024  
**Lab Number** : **06080307** **Diagnosed** : 06 Feb 2024  
**Unique Number** : 10862398 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 836 - Kansas City Hauling**  
 7801 East Truman Road  
 Kansas City, MO  
 US 64126  
 Contact: Loyce Stewart  
 loyce.stewart@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: