




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

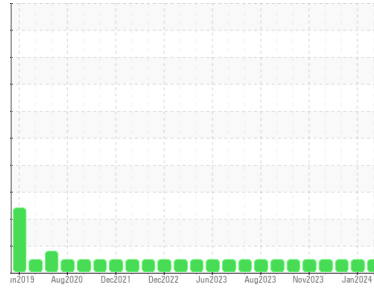

Machine Id  
**829057-101295**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>GFL0102980</b>  | GFL0102978  | GFL0102973  |
| Sample Date        | Client Info |             |            | <b>04 Feb 2024</b> | 15 Jan 2024 | 07 Jan 2024 |
| Machine Age        | hrs         | Client Info |            | <b>11086</b>       | 11017       | 10958       |
| Oil Age            | hrs         | Client Info |            | <b>0</b>           | 0           | 0           |
| Oil Changed        | Client Info |             |            | <b>N/A</b>         | N/A         | N/A         |
| Sample Status      |             |             |            | <b>NORMAL</b>      | NORMAL      | NORMAL      |

| CONTAMINATION |           | method | limit/base | current        | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel          | WC Method | >5     |            | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water         | WC Method | >0.2   |            | <b>NEG</b>     | NEG      | NEG      |
| Glycol        | WC Method |        |            | <b>NEG</b>     | NEG      | NEG      |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >100       | <b>&lt;1</b> | 8        | 12       |
| Chromium    | ppm | ASTM D5185m | >20        | <b>&lt;1</b> | <1       | <1       |
| Nickel      | ppm | ASTM D5185m | >4         | <b>0</b>     | 0        | <1       |
| Titanium    | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |
| Silver      | ppm | ASTM D5185m | >3         | <b>0</b>     | 0        | 0        |
| Aluminum    | ppm | ASTM D5185m | >20        | <b>4</b>     | 3        | 5        |
| Lead        | ppm | ASTM D5185m | >40        | <b>0</b>     | 0        | <1       |
| Copper      | ppm | ASTM D5185m | >330       | <b>0</b>     | <1       | <1       |
| Tin         | ppm | ASTM D5185m | >15        | <b>0</b>     | 0        | <1       |
| Vanadium    | ppm | ASTM D5185m |            | <b>0</b>     | <1       | 0        |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |

| ADDITIVES  |     | method      | limit/base | current     | history1 | history2 |
|------------|-----|-------------|------------|-------------|----------|----------|
| Boron      | ppm | ASTM D5185m | 250        | <b>21</b>   | 16       | 6        |
| Barium     | ppm | ASTM D5185m | 10         | <b>0</b>    | 0        | 0        |
| Molybdenum | ppm | ASTM D5185m | 100        | <b>56</b>   | 60       | 63       |
| Manganese  | ppm | ASTM D5185m |            | <b>0</b>    | <1       | <1       |
| Magnesium  | ppm | ASTM D5185m | 450        | <b>828</b>  | 894      | 941      |
| Calcium    | ppm | ASTM D5185m | 3000       | <b>1113</b> | 1172     | 1136     |
| Phosphorus | ppm | ASTM D5185m | 1150       | <b>985</b>  | 1043     | 1143     |
| Zinc       | ppm | ASTM D5185m | 1350       | <b>1200</b> | 1241     | 1349     |
| Sulfur     | ppm | ASTM D5185m | 4250       | <b>2921</b> | 3130     | 3253     |



| CONTAMINANTS |     | method      | limit/base | current  | history1 | history2 |
|--------------|-----|-------------|------------|----------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >25        | <b>4</b> | 4        | 4        |
| Sodium       | ppm | ASTM D5185m | >216       | <b>0</b> | 2        | 6        |
| Potassium    | ppm | ASTM D5185m | >20        | <b>0</b> | 1        | <1       |

| INFRA-RED |          | method      | limit/base | current     | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 | >3         | <b>0.4</b>  | 0.4      | 0.6      |
| Nitration | Abs/cm   | *ASTM D7624 | >20        | <b>6.8</b>  | 6.3      | 8.1      |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30        | <b>18.7</b> | 18.5     | 19.4     |

| FLUID DEGRADATION |          | method      | limit/base | current     | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation         | Abs/.1mm | *ASTM D7414 | >25        | <b>14.0</b> | 13.8     | 15.0     |
| Base Number (BN)  | mg KOH/g | ASTM D2896  | 8.5        | <b>8.8</b>  | 8.7      | 8.3      |







# OIL ANALYSIS REPORT

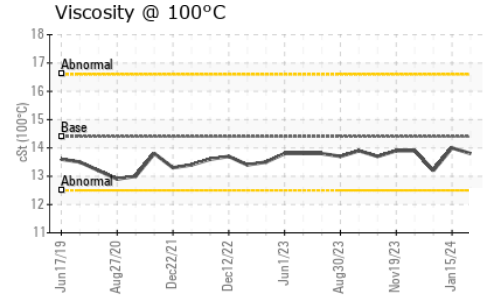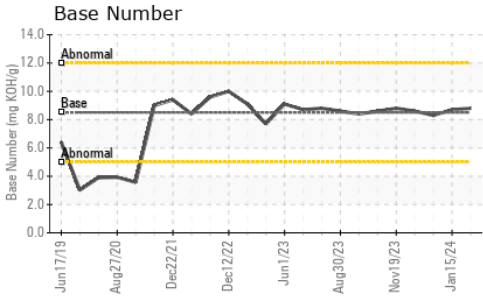

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1    | history2 |      |
|------------------|--------|------------|---------|-------------|----------|------|
| Visc @ 100°C     | cSt    | ASTM D445  | 14.4    | <b>13.8</b> | 14.0     | 13.2 |

## GRAPHS

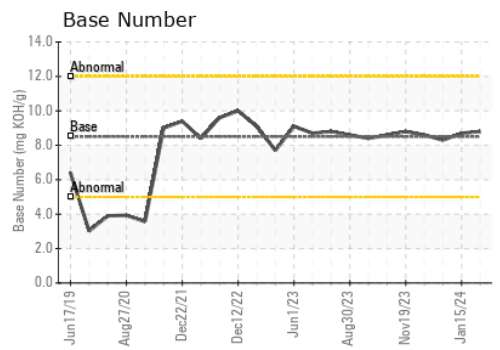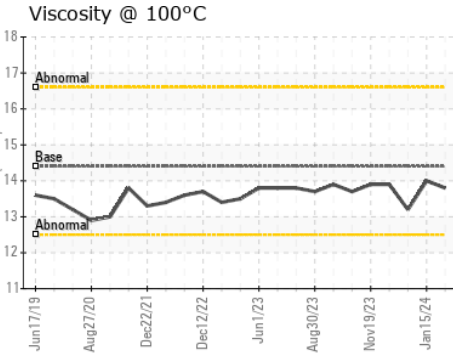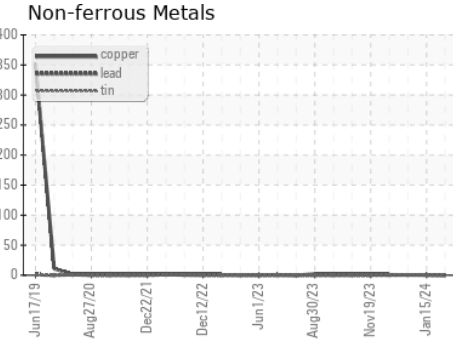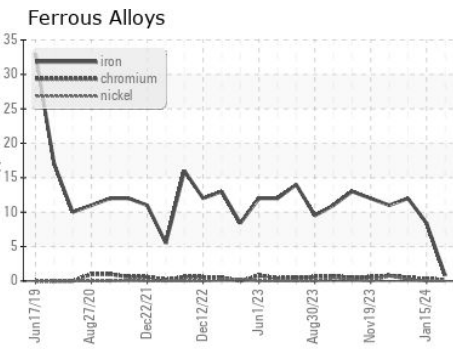

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0102980 **Recieved** : 05 Feb 2024  
**Lab Number** : **06080406** **Diagnosed** : 06 Feb 2024  
**Unique Number** : 10862497 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 816 - WCA of South Arkansas**  
 3083 Smackover Hwy  
 El Dorado, AR  
 US 71730  
 Contact: Mike Howell  
 mike.howell@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: