




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**(55050Z)**  
Machine Id  
**913086**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (11 GAL)**

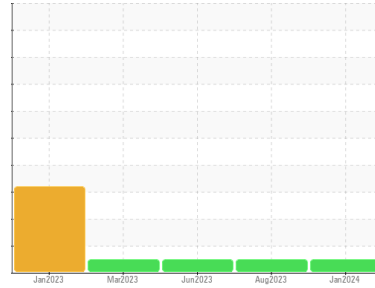

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0107480</b>	GFL0064704	GFL0072497
Sample Date	Client Info		<b>30 Jan 2024</b>	29 Aug 2023	09 Jun 2023
Machine Age	hrs	Client Info	<b>3539</b>	2337	1744
Oil Age	hrs	Client Info	<b>593</b>	593	588
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>3</b>	14	20
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>5</b>	<1	1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	1
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>4</b>	13	41
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>18</b>	28	14
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>66</b>	69	60
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>883</b>	774	952
Calcium	ppm	ASTM D5185m 1070	<b>1124</b>	1430	1184
Phosphorus	ppm	ASTM D5185m 1150	<b>943</b>	838	926
Zinc	ppm	ASTM D5185m 1270	<b>1181</b>	1098	1233
Sulfur	ppm	ASTM D5185m 2060	<b>2614</b>	2871	2833

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	5	6
Sodium	ppm	ASTM D5185m	<b>2</b>	7	4
Potassium	ppm	ASTM D5185m >20	<b>0</b>	<1	0

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.6</b>	0.6	0.7
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.4</b>	9.1	9.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.3</b>	21.9	21.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.3</b>	17.0	17.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.5</b>	6.5	7.2







# OIL ANALYSIS REPORT

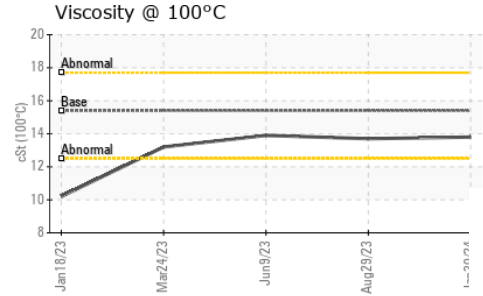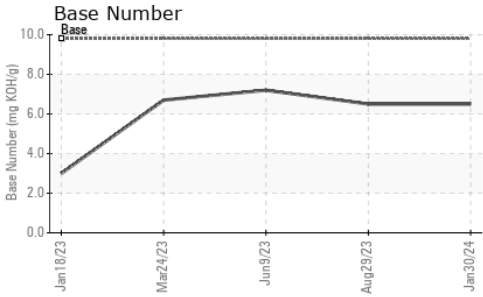

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.8</b>	13.7	13.9

## GRAPHS

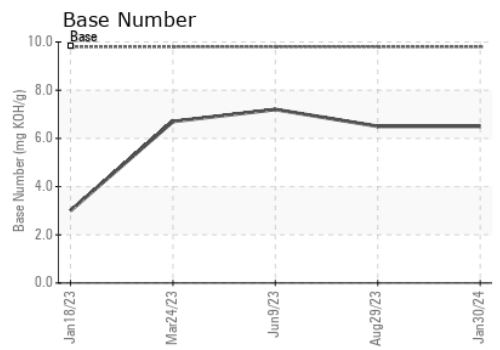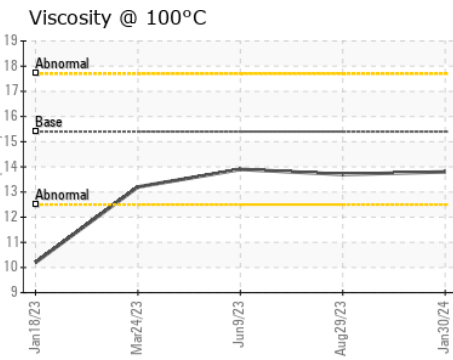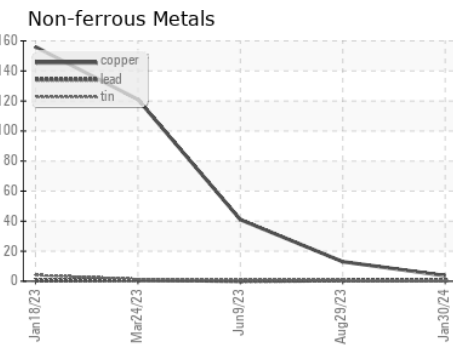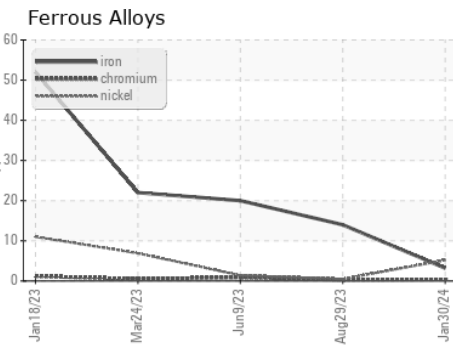

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0107480 **Received** : 05 Feb 2024  
**Lab Number** : **06080474** **Diagnosed** : 06 Feb 2024  
**Unique Number** : 10862565 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 912 - Fort Atkinson HC**  
 1215 Klement St.  
 Fort Atkinson, WI  
 US 53538  
 Contact: LEONARD KOZLEUCHAR  
 leonard.kozleuchar@gflenv.com  
 T: (262)210-6528  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)