

OIL ANALYSIS REPORT

Walgreens - Out of Service [Walgreens - Out of Service] 136A624567 Component

Diesel Engine

PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.







				Jan2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0103636		
Sample Date		Client Info		24 Jan 2024		
Machine Age	mls	Client Info		64567		
Oil Age	mls	Client Info		31918		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METAL	.S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	43		
Chromium	ppm	ASTM D5185m	>20	3		
Nickel	ppm	ASTM D5185m	>4	1		
Titanium	ppm	ASTM D5185m		5		
Silver	ppm	ASTM D5185m	>3	<1		
Aluminum	ppm	ASTM D5185m	>20	19		
Lead	ppm	ASTM D5185m	>40	<1		
Copper	ppm	ASTM D5185m	>330	122		
Tin	ppm	ASTM D5185m	>15	2		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	9		
Barium	ppm	ASTM D5185m	0	0		
Molybdenum	ppm	ASTM D5185m	50	52		
Manganese	ppm	ASTM D5185m	0	2		
Magnesium	ppm	ASTM D5185m	950	829		
Calcium	ppm	ASTM D5185m	1050	1186		
Phosphorus	ppm	ASTM D5185m	995	937		
Zinc	ppm	ASTM D5185m	1180	1161		
Sulfur	ppm	ASTM D5185m	2600	2142		
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	6		
Sodium	ppm	ASTM D5185m		5		
Potassium	ppm	ASTM D5185m	>20	51		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.8		
Nitration	Abs/cm	*ASTM D7624	>20	9.1		
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.2		
FLUID DEGRAI	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.1		
Base Number (BN)	mg KOH/g	ASTM D2896		6.6		




OIL ANALYSIS REPORT

VISUAL





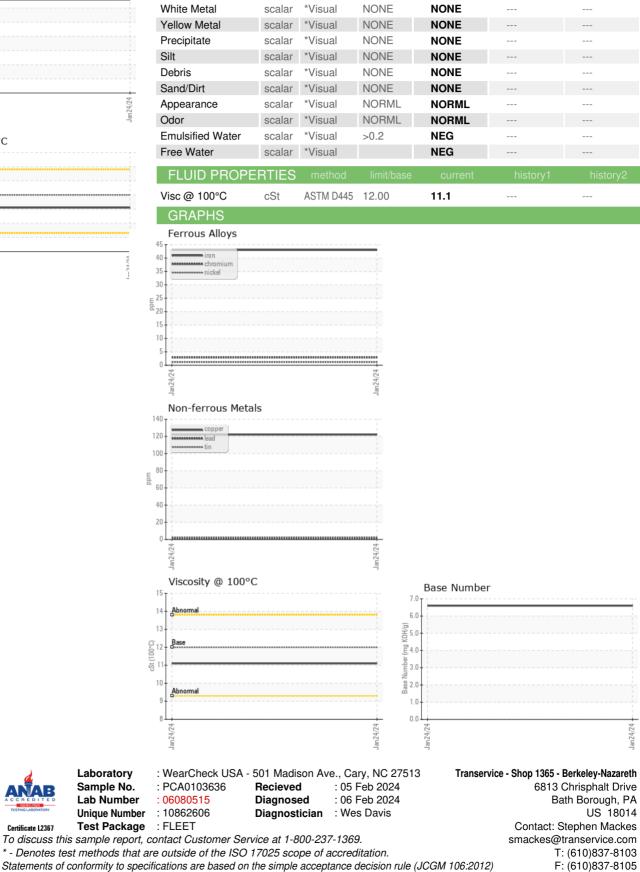

Report Id: TSV1365 [WUSCAR] 06080515 (Generated: 02/07/2024 09:17:14) Rev: 1

Certificate L2367

Contact/Location: Stephen Mackes - TSV1365