


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

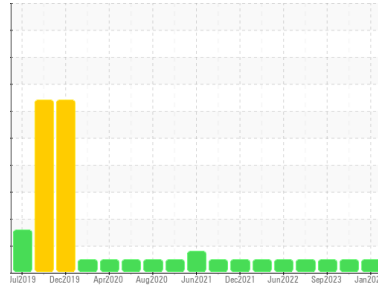

Area  
**KEMP QUARRIES / HULBERT**  
Machine Id  
**WL131**  
Component  
**Rear Differential**  
Fluid  
**MOBIL MOBILTRANS HD 50 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0109186</b>	PCA0109232	PCA0086856
Sample Date	Client Info		<b>27 Jan 2024</b>	03 Nov 2023	15 Sep 2023
Machine Age	hrs	Client Info	<b>10805</b>	10240	9868
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	<b>66</b>	55	45
Chromium	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m >3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>2</b>	<1	0
Lead	ppm	ASTM D5185m >13	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m >103	<b>3</b>	3	3
Tin	ppm	ASTM D5185m >5	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>10</b>	15	9
Barium	ppm	ASTM D5185m	<b>5</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	<1	2
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>30</b>	31	35
Calcium	ppm	ASTM D5185m	<b>3252</b>	3093	3240
Phosphorus	ppm	ASTM D5185m	<b>1019</b>	1045	1024
Zinc	ppm	ASTM D5185m	<b>1234</b>	1213	1260
Sulfur	ppm	ASTM D5185m	<b>5056</b>	5260	4642


## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >100	<b>15</b>	29	13
Sodium	ppm	ASTM D5185m	<b>0</b>	2	1
Potassium	ppm	ASTM D5185m >20	<b>1</b>	0	0

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	LIGHT
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT








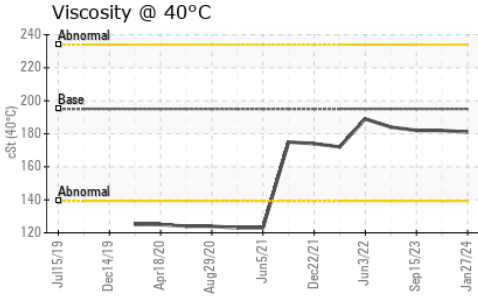


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	195	<b>181</b>	182	182

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

## GRAPHS

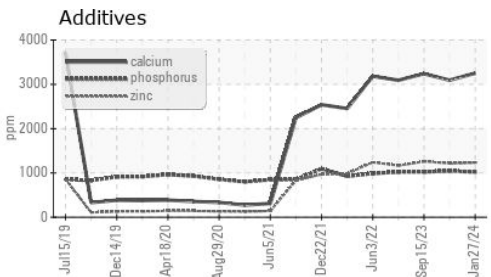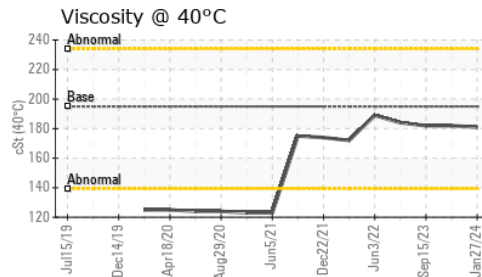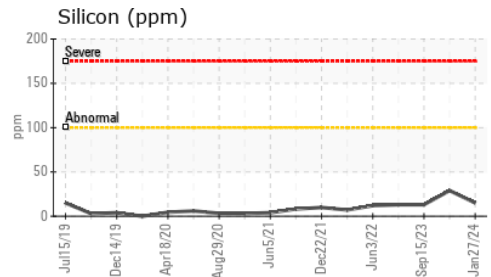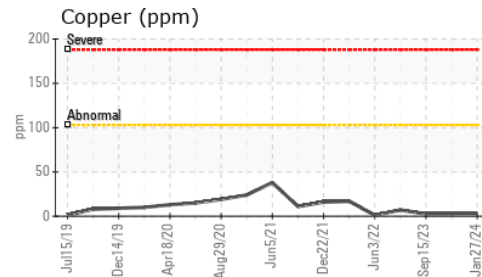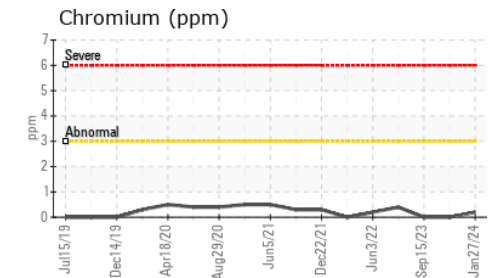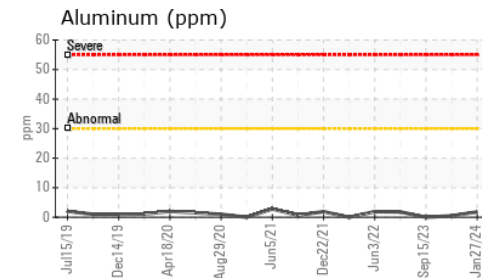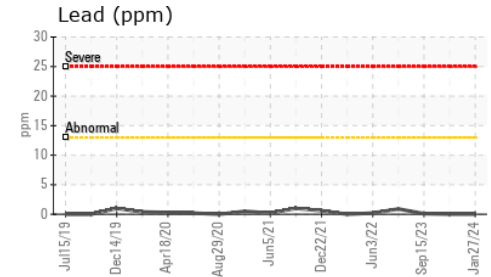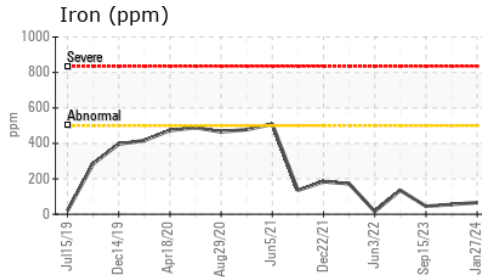

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0109186  
**Lab Number** : 06080953  
**Unique Number** : 10863044  
**Test Package** : MOB 1

**Kemp Quarries - Kemp Stone - Hulbert**  
 17801 Hwy 80  
 Hulbert, OK  
 US 74441

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: hulbert@kempstone.com

T:

F: