




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

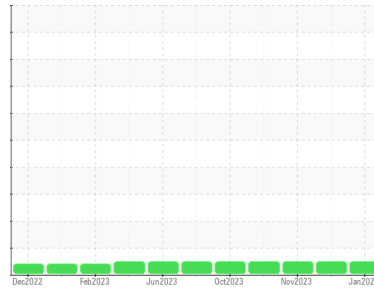

Machine Id  
**913144**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0105552</b>	GFL0105565	GFL0101115
Sample Date	Client Info	<b>31 Jan 2024</b>	03 Jan 2024	17 Nov 2023
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>Changed</b>	Not Changd	Not Changd
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	<b>12</b>	10	7
Chromium	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	0
Nickel	ppm ASTM D5185m >2	<b>0</b>	<1	0
Titanium	ppm ASTM D5185m	<b>0</b>	<1	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >25	<b>6</b>	3	4
Lead	ppm ASTM D5185m >45	<b>&lt;1</b>	<1	0
Copper	ppm ASTM D5185m >85	<b>4</b>	4	4
Tin	ppm ASTM D5185m >4	<b>0</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>4</b>	6	8
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>62</b>	61	59
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm ASTM D5185m 1010	<b>816</b>	775	795
Calcium	ppm ASTM D5185m 1070	<b>1315</b>	1275	1347
Phosphorus	ppm ASTM D5185m 1150	<b>1036</b>	981	1066
Zinc	ppm ASTM D5185m 1270	<b>1277</b>	1176	1243
Sulfur	ppm ASTM D5185m 2060	<b>3084</b>	3250	3179

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	<b>6</b>	7	4
Sodium	ppm ASTM D5185m	<b>2</b>	0	2
Potassium	ppm ASTM D5185m >20	<b>8</b>	7	6

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.4</b>	0.3	0.2
Nitration	Abs/cm *ASTM D7624 >20	<b>10.1</b>	8.5	7.2
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>21.3</b>	19.9	19.3

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>17.6</b>	16.0	15.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>6.3</b>	7.4	7.8







# OIL ANALYSIS REPORT

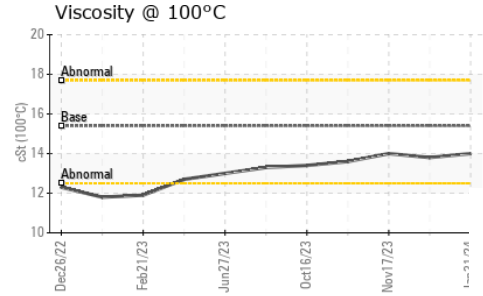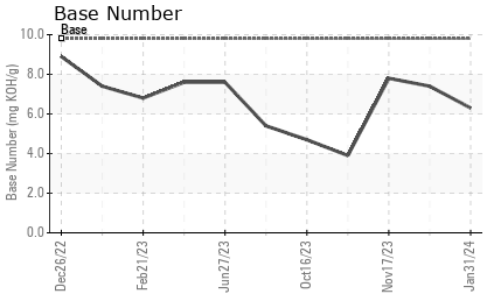

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.0</b>	13.8	14.0

## GRAPHS

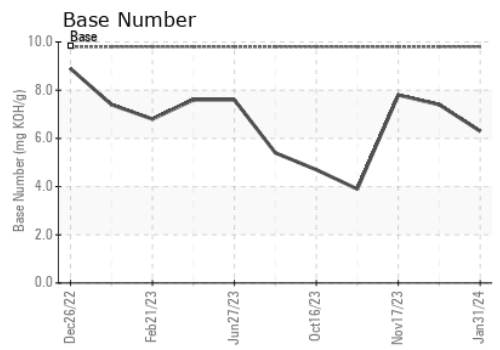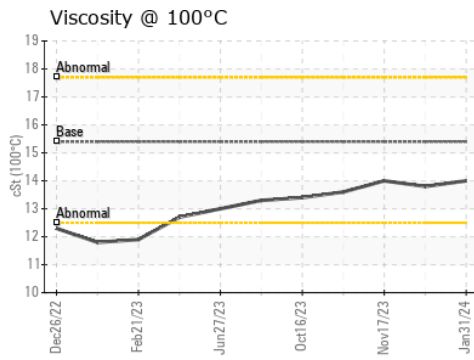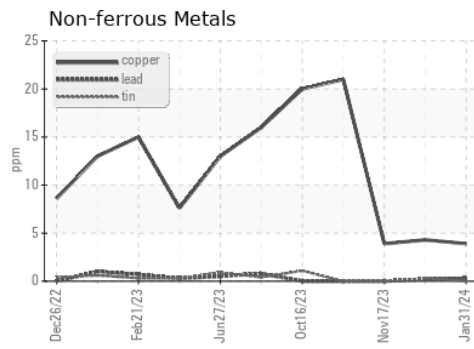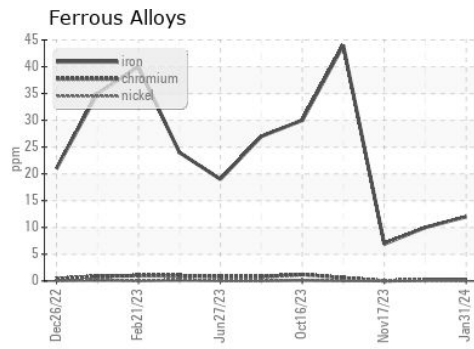

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0105552 **Received** : 06 Feb 2024  
**Lab Number** : **06081045** **Diagnosed** : 06 Feb 2024  
**Unique Number** : 10863136 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 846 - Mayfield Hauling**  
 3426 State Route 45  
 Mayfield, KY  
 US 42066  
 Contact: Jack Lindsey  
 jack.lindsey@gflenv.com  
 T: (270)970-3690  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)