




# OIL ANALYSIS REPORT

Sample Rating Trend

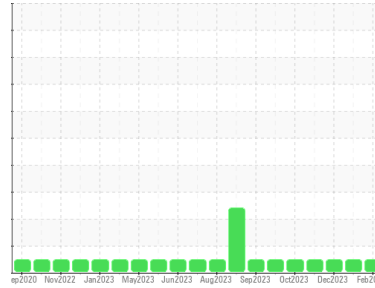

**NORMAL**



Machine Id  
**729069-362009**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0105176</b>	GFL0105145	GFL0090292
Sample Date	Client Info		<b>02 Feb 2024</b>	02 Jan 2024	05 Dec 2023
Machine Age	hrs	Client Info	<b>13376</b>	13168	13040
Oil Age	hrs	Client Info	<b>200</b>	150	300
Oil Changed	Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>6</b>	9	9
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	2
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m >330	<b>4</b>	35	37
Tin	ppm	ASTM D5185m >15	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>1</b>	17	18
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>58</b>	63	66
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>936</b>	853	965
Calcium	ppm	ASTM D5185m 1070	<b>1020</b>	1005	1120
Phosphorus	ppm	ASTM D5185m 1150	<b>1011</b>	945	1043
Zinc	ppm	ASTM D5185m 1270	<b>1246</b>	1137	1239
Sulfur	ppm	ASTM D5185m 2060	<b>3111</b>	2870	3257

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	3	4
Sodium	ppm	ASTM D5185m	<b>3</b>	5	4
Potassium	ppm	ASTM D5185m >20	<b>3</b>	<1	<1

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.4	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.4</b>	6.7	5.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.8</b>	18.7	17.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.3</b>	13.9	13.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.0</b>	8.0	8.3







# OIL ANALYSIS REPORT

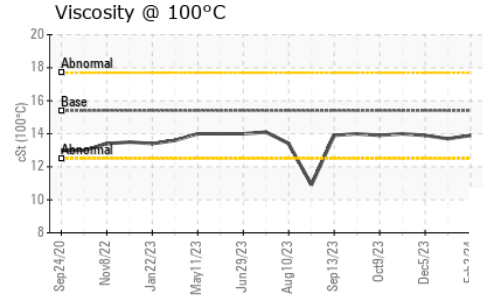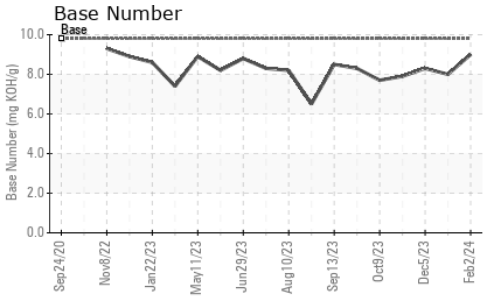

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.9</b>	13.7	13.9

## GRAPHS

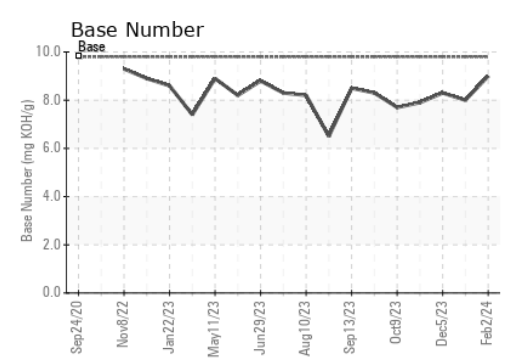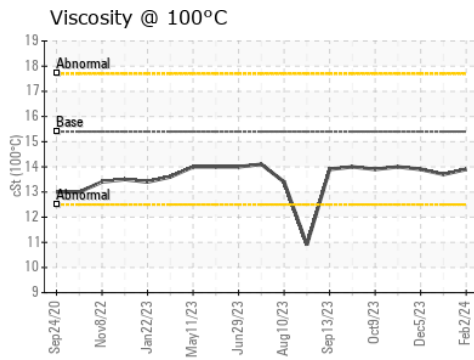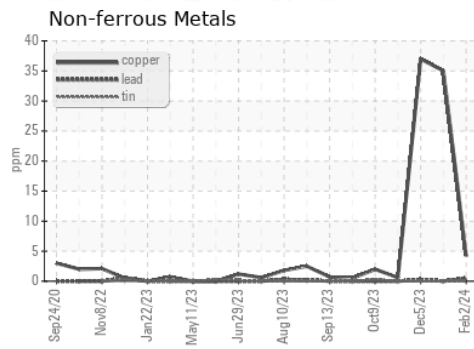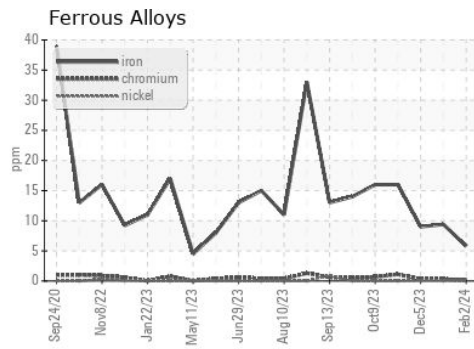

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0105176 **Received** : 06 Feb 2024  
**Lab Number** : **06081091** **Diagnosed** : 06 Feb 2024  
**Unique Number** : 10863182 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 821 - Ozarks Hauling**  
 33924 Olath Drive  
 Lebanon, MO  
 US 65536  
 Contact: Landen Johnson  
 landen.johnson@gflenv.com  
 T: (417)664-0010  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)