




# OIL ANALYSIS REPORT

Sample Rating Trend

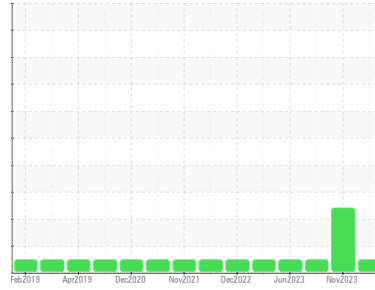

**NORMAL**



Machine Id  
**929081-260352**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0109211</b>	GFL0098275	GFL0067099
Sample Date	Client Info		<b>25 Jan 2024</b>	15 Nov 2023	29 Aug 2023
Machine Age	hrs	Client Info	<b>14820</b>	14363	32764
Oil Age	hrs	Client Info	<b>300</b>	700	589
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>16</b>	20	18
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	2
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	<1	2
Lead	ppm	ASTM D5185m >40	<b>4</b>	3	5
Copper	ppm	ASTM D5185m >330	<b>2</b>	3	<1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	<1
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>65</b>	70	68
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>931</b>	939	984
Calcium	ppm	ASTM D5185m 1070	<b>1064</b>	1040	1125
Phosphorus	ppm	ASTM D5185m 1150	<b>1009</b>	1047	1063
Zinc	ppm	ASTM D5185m 1270	<b>1251</b>	1189	1311
Sulfur	ppm	ASTM D5185m 2060	<b>2975</b>	2649	3336

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>8</b>	8	10
Sodium	ppm	ASTM D5185m	<b>53</b>	▲ 135	4
Potassium	ppm	ASTM D5185m >20	<b>20</b>	▲ 41	<1

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.3</b>	10.3	9.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.7</b>	21.6	20.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.5</b>	16.5	17.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.0</b>	7.3	7.3







# OIL ANALYSIS REPORT

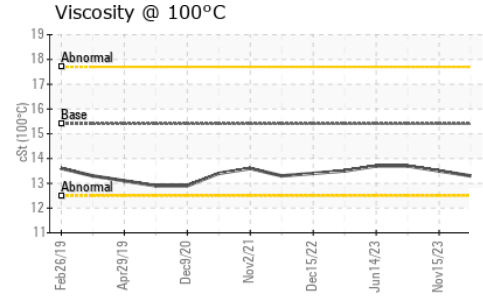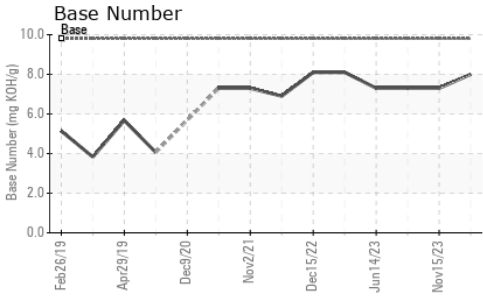

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.3</b>	13.5	13.7

## GRAPHS

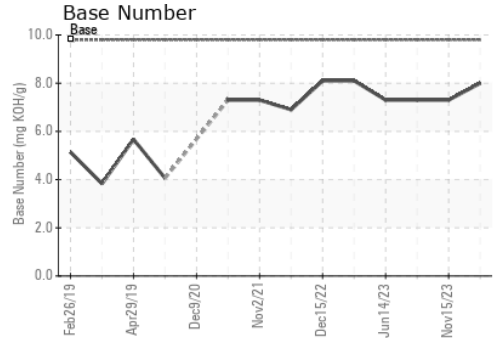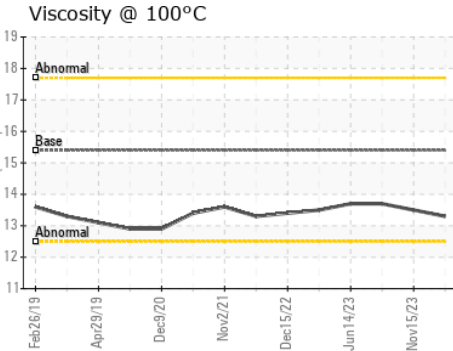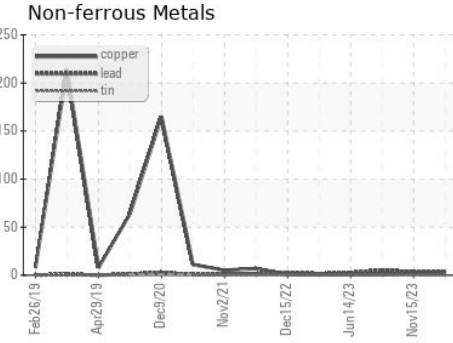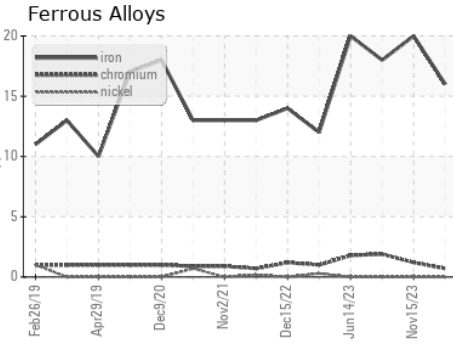

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0109211 **Received** : 06 Feb 2024  
**Lab Number** : **06081099** **Diagnosed** : 06 Feb 2024  
**Unique Number** : 10863190 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 822 - Springfield Hauling**  
 2120 West Bennett Street  
 Springfield, MO  
 US 65807  
 Contact: Dennis Moore  
 dennis.moore@gflenv.com  
 T: (417)403-3641  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)