




OIL ANALYSIS REPORT

Sample Rating Trend

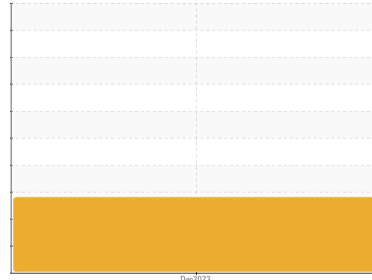

DIRT



Machine Id
914049
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check all areas where dirt can enter the system. Resample at the next service interval to monitor.

▲ Wear

All component wear rates are normal.

▲ Contamination

Fuel content negligible. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0084769	---	---
Sample Date	Client Info		27 Dec 2023	---	---
Machine Age	hrs	Client Info	630	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	43	---	---
Chromium	ppm	ASTM D5185m >20	<1	---	---
Nickel	ppm	ASTM D5185m >5	4	---	---
Titanium	ppm	ASTM D5185m >2	<1	---	---
Silver	ppm	ASTM D5185m >2	1	---	---
Aluminum	ppm	ASTM D5185m >20	▲ 6	---	---
Lead	ppm	ASTM D5185m >40	<1	---	---
Copper	ppm	ASTM D5185m >330	171	---	---
Tin	ppm	ASTM D5185m >15	3	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	159	---	---
Barium	ppm	ASTM D5185m 0	0	---	---
Molybdenum	ppm	ASTM D5185m 60	108	---	---
Manganese	ppm	ASTM D5185m 0	4	---	---
Magnesium	ppm	ASTM D5185m 1010	723	---	---
Calcium	ppm	ASTM D5185m 1070	1301	---	---
Phosphorus	ppm	ASTM D5185m 1150	737	---	---
Zinc	ppm	ASTM D5185m 1270	872	---	---
Sulfur	ppm	ASTM D5185m 2060	2261	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	▲ 50	---	---
Sodium	ppm	ASTM D5185m	4	---	---
Potassium	ppm	ASTM D5185m >20	12	---	---
Fuel	%	ASTM D3524 >3.0	0.5	---	---

INFRA-RED






	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	0.4	---	---
Nitration	Abs/cm	*ASTM D7624 >20	10.3	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	23.7	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	21.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	7.4	---	---







OIL ANALYSIS REPORT

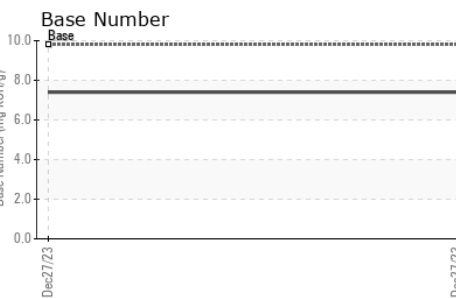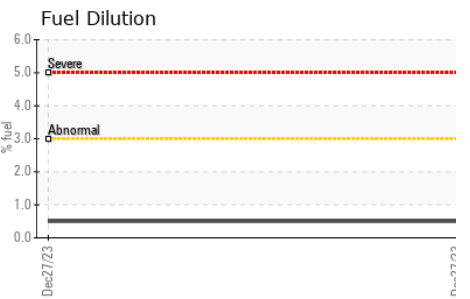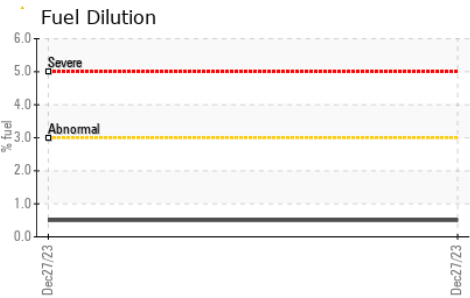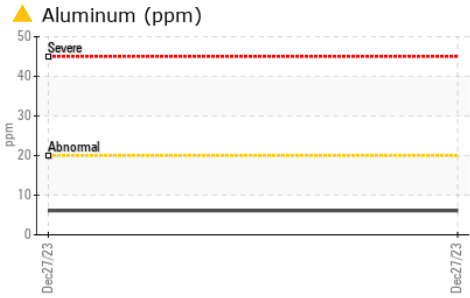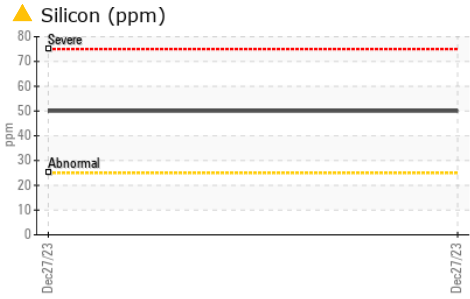

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 10.6	---

GRAPHS

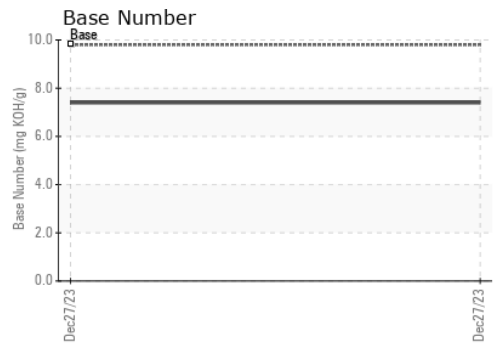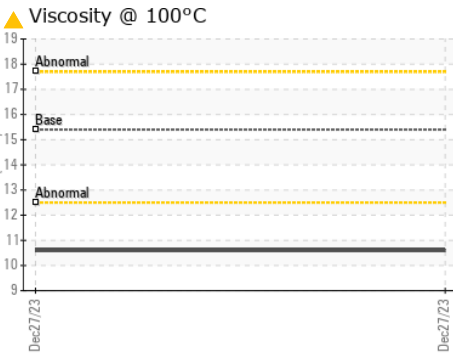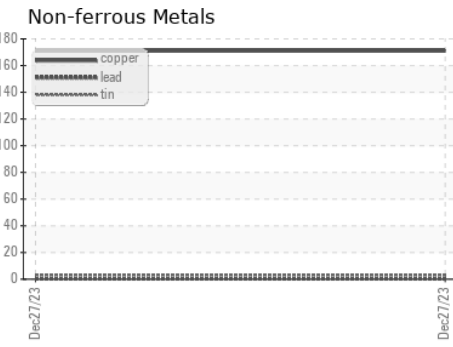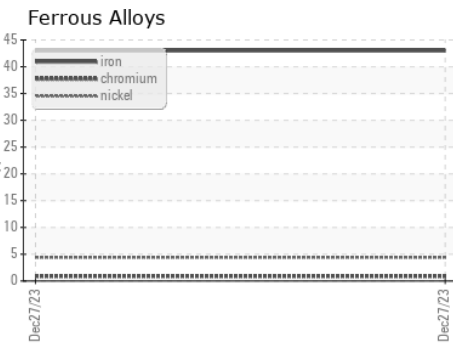

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0084769 **Received** : 06 Feb 2024
Lab Number : 06081871 **Tested** : 08 Feb 2024
Unique Number : 10869316 **Diagnosed** : 08 Feb 2024 - Angela Borella
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 959A - Urbana HC
 4808 cunningham Rd
 Urbana, IL
 US 61802
 Contact: Kristine Tryon
 Ktryon@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)