




# OIL ANALYSIS REPORT

Sample Rating Trend

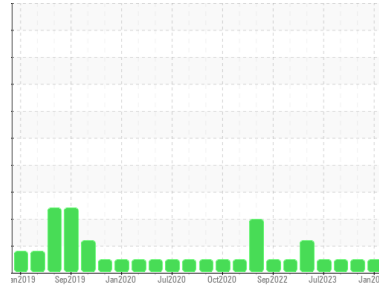

**NORMAL**



Machine Id  
**923034-260317**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0065753</b>	GFL0087184	GFL0087150
Sample Date	Client Info	<b>14 Jan 2024</b>	15 Aug 2023	20 Jul 2023
Machine Age	hrs	<b>0</b>	20441	20257
Oil Age	hrs	<b>0</b>	600	600
Oil Changed	Client Info	<b>N/A</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	<b>22</b>	11	40
Chromium	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	2
Nickel	ppm ASTM D5185m >2	<b>&lt;1</b>	0	<1
Titanium	ppm ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm ASTM D5185m >2	<b>&lt;1</b>	<1	0
Aluminum	ppm ASTM D5185m >25	<b>4</b>	2	5
Lead	ppm ASTM D5185m >45	<b>1</b>	<1	2
Copper	ppm ASTM D5185m >85	<b>2</b>	2	10
Tin	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>4</b>	<1	3
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>58</b>	62	66
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>868</b>	1005	1002
Calcium	ppm ASTM D5185m 1070	<b>955</b>	1125	1155
Phosphorus	ppm ASTM D5185m 1150	<b>982</b>	1038	1025
Zinc	ppm ASTM D5185m 1270	<b>1177</b>	1262	1273
Sulfur	ppm ASTM D5185m 2060	<b>2788</b>	3665	3410

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	<b>5</b>	4	7
Sodium	ppm ASTM D5185m	<b>32</b>	7	76
Potassium	ppm ASTM D5185m >20	<b>3</b>	2	1

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>1.3</b>	0.7	1.9
Nitration	Abs/cm *ASTM D7624 >20	<b>9.9</b>	7.2	12.6
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>21.4</b>	19.7	24.9

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.7</b>	14.6	19.3
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.9</b>	8.9	7.7







# OIL ANALYSIS REPORT

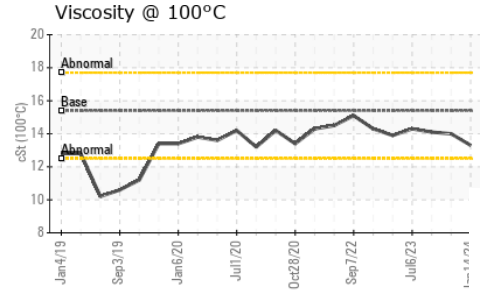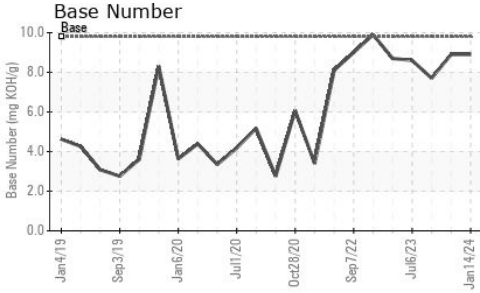

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.3</b>	14.0	14.1

## GRAPHS

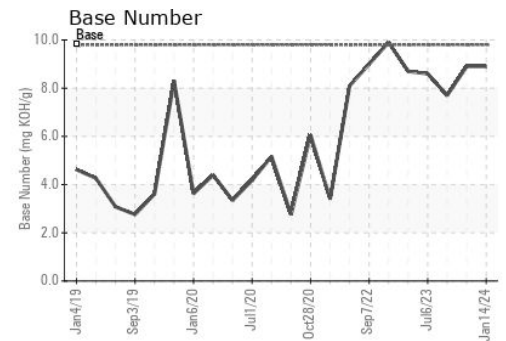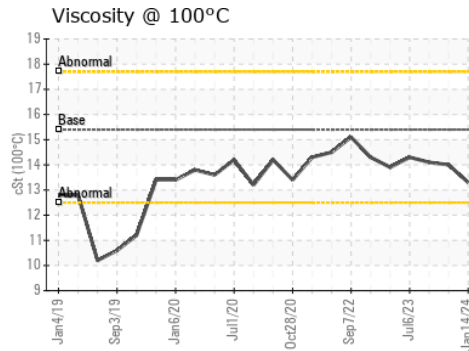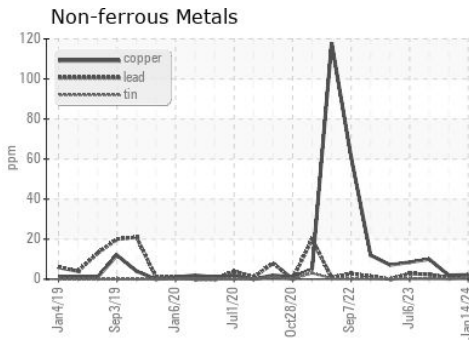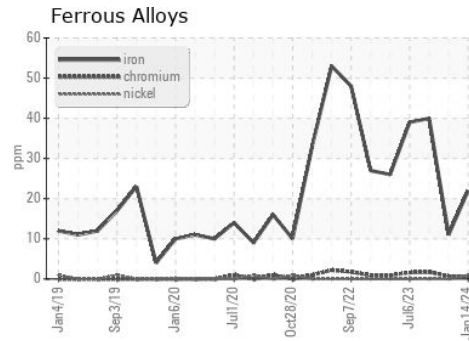

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0065753  
 Lab Number : 06081900  
 Unique Number : 10869345  
 Test Package : FLEET

Received : 06 Feb 2024  
 Tested : 07 Feb 2024  
 Diagnosed : 07 Feb 2024 - Wes Davis

GFL Environmental - 823 - Central Missouri Hauling  
 24461 Oak Grove Lane  
 Sedalia, MO  
 US 65301

Contact: Terry Randolph  
 trandolph@gflenv.com

T: (660)631-2116

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)