


OIL ANALYSIS REPORT



Area
KEMP QUARRIES / RIVER VALLEY BACKBONE
Machine Id
WL088
Component
Front Right Final Drive
Fluid
MOBIL MOBILTRANS HD 50 (--- GAL)

Sample Rating Trend

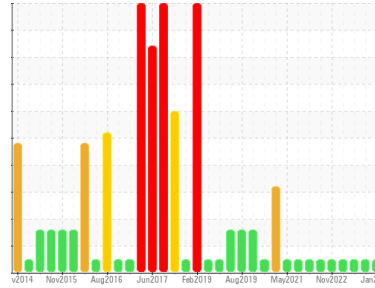

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0069723	PCA0084825	PCA0084896
Sample Date	Client Info	30 Jan 2024	10 Nov 2023	02 Oct 2023
Machine Age	hrs	43499	6716	36443
Oil Age	hrs	1200	900	600
Oil Changed	Client Info	Changed	Not Changd	Not Changd
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >800	42	33	31
Chromium	ppm ASTM D5185m >10	<1	<1	0
Nickel	ppm ASTM D5185m >5	0	<1	<1
Titanium	ppm ASTM D5185m >15	0	<1	<1
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >75	2	2	0
Lead	ppm ASTM D5185m >10	0	<1	<1
Copper	ppm ASTM D5185m >75	4	4	3
Tin	ppm ASTM D5185m >8	0	0	<1
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	<1	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	1	0	1
Barium	ppm ASTM D5185m	5	0	1
Molybdenum	ppm ASTM D5185m	0	<1	<1
Manganese	ppm ASTM D5185m	0	<1	<1
Magnesium	ppm ASTM D5185m	12	13	11
Calcium	ppm ASTM D5185m	2809	2930	2758
Phosphorus	ppm ASTM D5185m	958	1094	1014
Zinc	ppm ASTM D5185m	1227	1306	1243
Sulfur	ppm ASTM D5185m	5090	5159	5184


CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >400	38	31	31
Sodium	ppm ASTM D5185m	0	0	0
Potassium	ppm ASTM D5185m >20	2	2	1

VISUAL

method	limit/base	current	history1	history2
White Metal	scalar *Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar *Visual NONE	NONE	NONE	NONE
Precipitate	scalar *Visual NONE	NONE	NONE	NONE
Silt	scalar *Visual NONE	NONE	NONE	NONE
Debris	scalar *Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar *Visual NONE	NONE	NONE	NONE
Appearance	scalar *Visual NORML	NORML	NORML	NORML
Odor	scalar *Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar *Visual >0.2	NEG	NEG	NEG
Free Water	scalar *Visual	NEG	NEG	NEG

OIL ANALYSIS REPORT








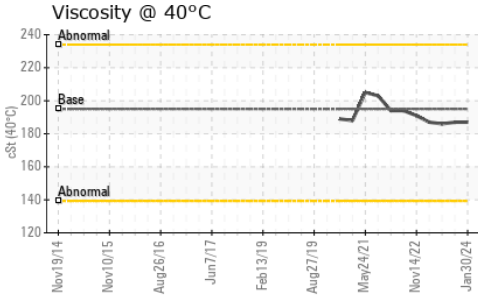


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	195	187	187	186

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color		no image	no image	no image
Bottom		no image	no image	no image

GRAPHS

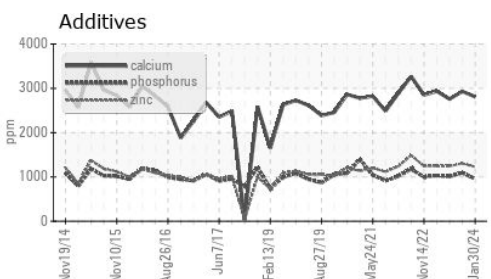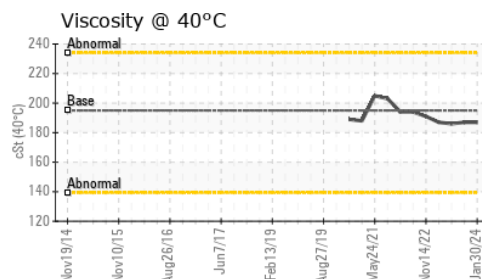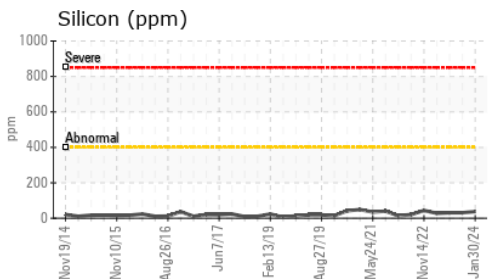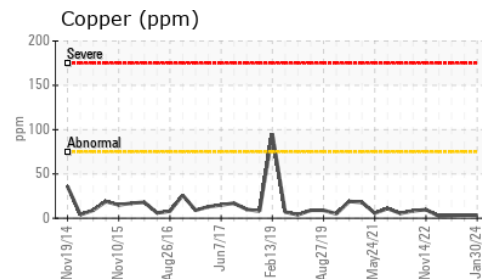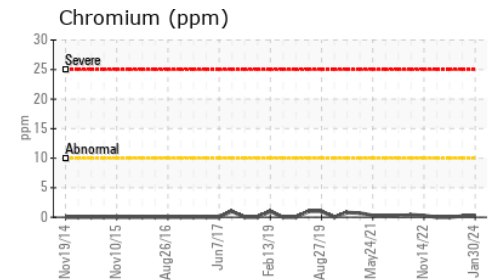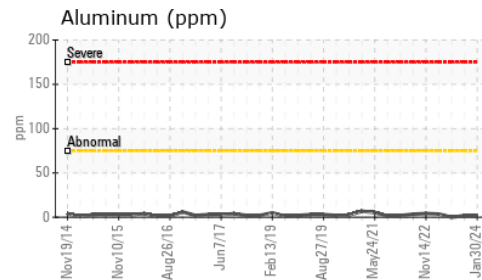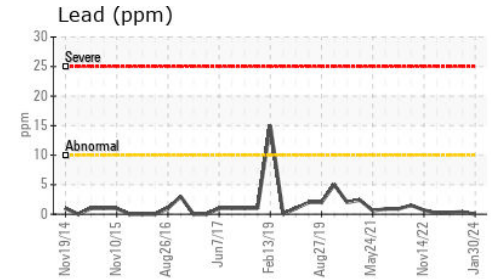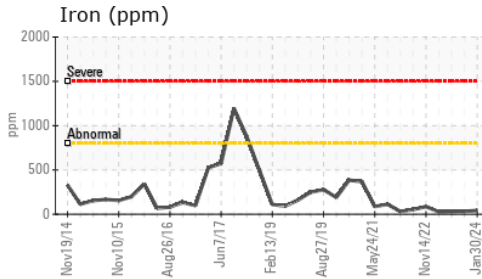

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0069723
Lab Number : 06082056
Unique Number : 10869501
Test Package : MOB 1

Received : 06 Feb 2024
Tested : 07 Feb 2024
Diagnosed : 07 Feb 2024 - Wes Davis

Kemp Quarries - River Valley - Backbone
 5600 S Hwy 253
 Huntington, AR
 US 72940

Contact: backbone@rivervalleyquarries.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: