


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
KEMP QUARRIES / RIVER VALLEY ARKOMA
Machine Id
WL108
Component
Front Left Final Drive
Fluid
MOBIL MOBILTRANS HD 50 (--- GAL)

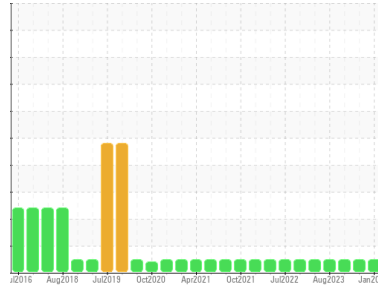

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0084372	PCA0084177	PCA0083942
Sample Date	Client Info			30 Jan 2024	29 Oct 2023	08 Sep 2023
Machine Age	hrs	Client Info		47663	47123	46766
Oil Age	hrs	Client Info		47123	45035	45035
Oil Changed	Client Info			Not Chngd	Changed	Not Chngd
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	NEG


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>800	22	42	50
Chromium	ppm	ASTM D5185m	>10	<1	0	<1
Nickel	ppm	ASTM D5185m	>5	0	<1	<1
Titanium	ppm	ASTM D5185m	>15	0	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>75	2	2	3
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>75	<1	<1	2
Tin	ppm	ASTM D5185m	>8	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		5	0	0
Molybdenum	ppm	ASTM D5185m		0	0	<1
Manganese	ppm	ASTM D5185m		0	<1	1
Magnesium	ppm	ASTM D5185m		9	18	20
Calcium	ppm	ASTM D5185m		3418	3247	3541
Phosphorus	ppm	ASTM D5185m		839	1052	1032
Zinc	ppm	ASTM D5185m		1050	1254	1292
Sulfur	ppm	ASTM D5185m		4570	4570	5625

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>400	11	19	20
Sodium	ppm	ASTM D5185m		0	2	4
Potassium	ppm	ASTM D5185m	>20	2	<1	2

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	0.2%
Free Water	scalar	*Visual		NEG	NEG	NEG

OIL ANALYSIS REPORT








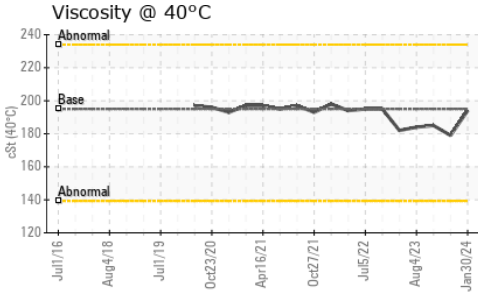


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	195	194	179	185

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

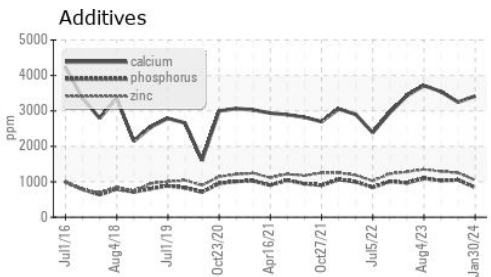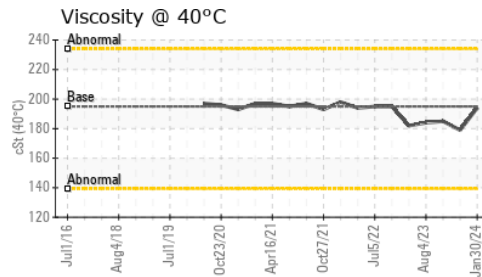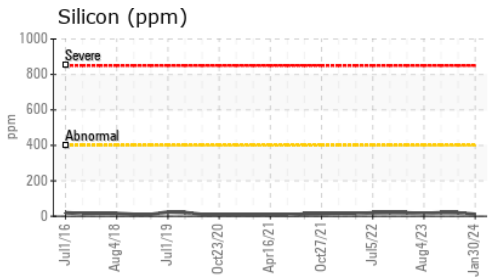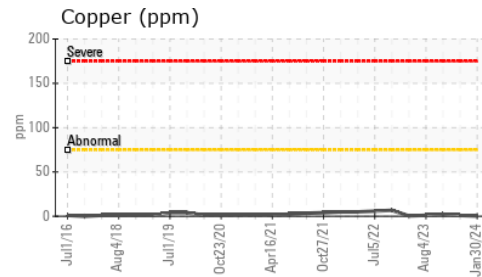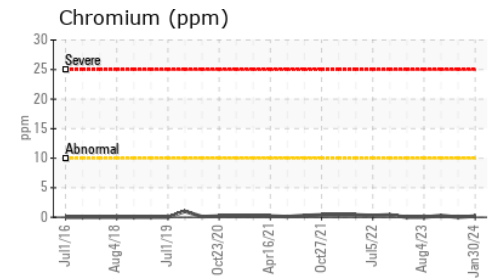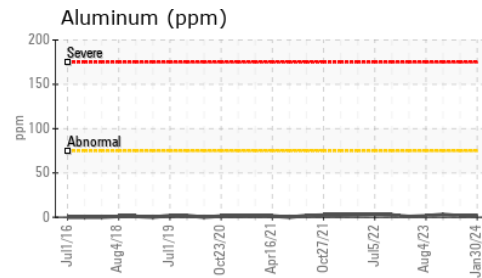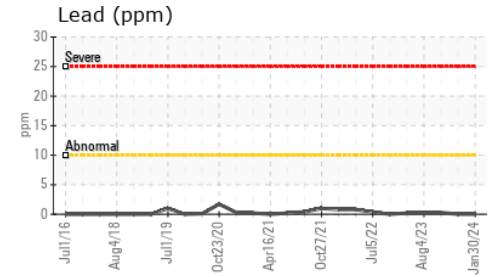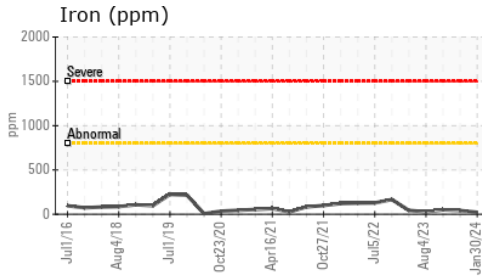

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0084372
Lab Number : **06082073**
Unique Number : 10869518
Test Package : MOB 1

Received : 06 Feb 2024
Tested : 07 Feb 2024
Diagnosed : 07 Feb 2024 - Wes Davis

Kemp Quarries - River Valley - Arkoma
 12971 HWY 9a
 Shawnee, OK
 US 74804

Contact: arkomashop@kempquarries.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: