


OIL ANALYSIS REPORT

Sample Rating Trend



FUEL

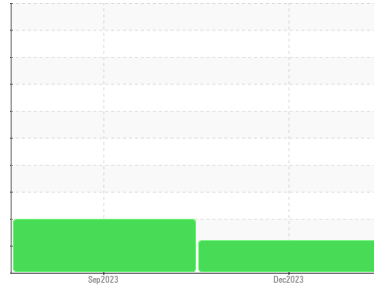

Machine Id
500-204
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a moderate amount of fuel present in the oil.

▲ Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0089581	PCA0106859	---
Sample Date	Client Info	29 Dec 2023	24 Sep 2023	---
Machine Age	hrs	1632	1145	---
Oil Age	hrs	495	0	---
Oil Changed	Client Info	Changed	Changed	---
Sample Status		ABNORMAL	ABNORMAL	---

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>100	31	45	---
Chromium	ppm	ASTM D5185m	>20	<1	2	---
Nickel	ppm	ASTM D5185m	>4	6	▲ 22	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	2	7	---
Lead	ppm	ASTM D5185m	>40	6	15	---
Copper	ppm	ASTM D5185m	>330	16	48	---
Tin	ppm	ASTM D5185m	>15	3	5	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	2	0	---
Barium	ppm	ASTM D5185m	0	2	0	---
Molybdenum	ppm	ASTM D5185m	60	60	69	---
Manganese	ppm	ASTM D5185m	0	<1	2	---
Magnesium	ppm	ASTM D5185m	1010	906	898	---
Calcium	ppm	ASTM D5185m	1070	998	1040	---
Phosphorus	ppm	ASTM D5185m	1150	857	897	---
Zinc	ppm	ASTM D5185m	1270	1202	1187	---
Sulfur	ppm	ASTM D5185m	2060	2380	2618	---

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	4	8	---
Sodium	ppm	ASTM D5185m		1	3	---
Potassium	ppm	ASTM D5185m	>20	7	22	---
Fuel	%	ASTM D3524	>5	▲ 4.8	▲ 7.1	---

INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>3	0.7	0.7	---
Nitration	Abs/cm	*ASTM D7624	>20	10.6	12.1	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.7	23.3	---

FLUID DEGRADATION


method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.2	20.2	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.2	6.2	---

OIL ANALYSIS REPORT


▲ Fuel Dilution



▲ Viscosity @ 100°C

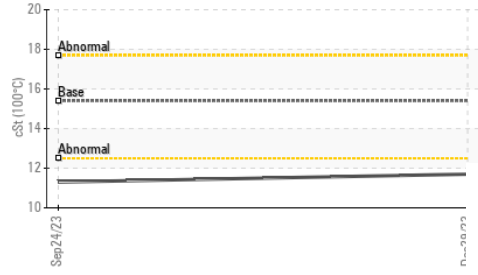


Base Number

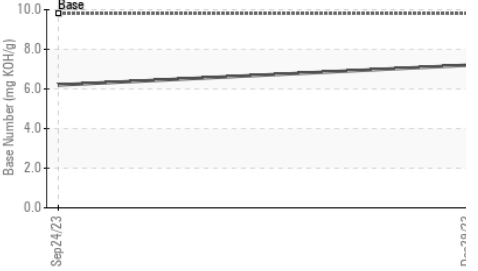

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 11.7	▲ 11.3	---

GRAPHS

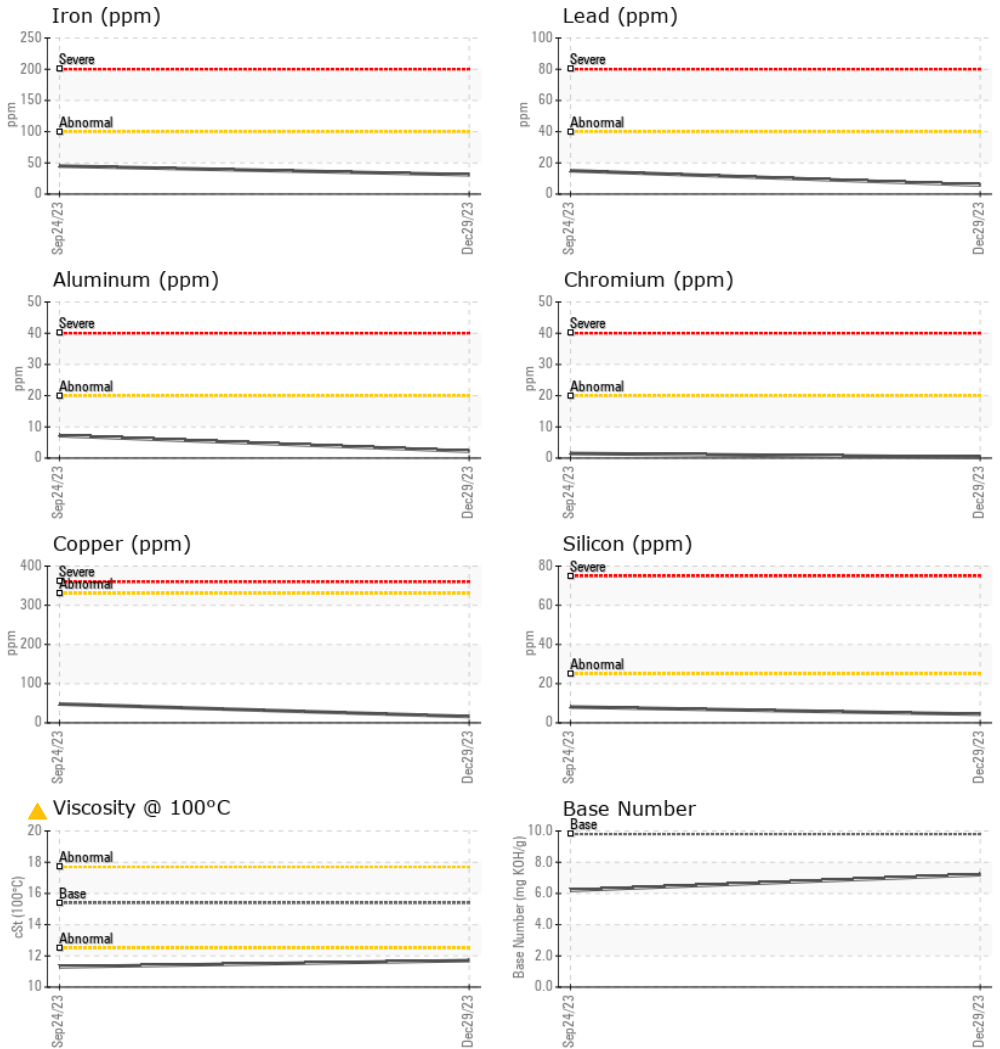

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0089581 **Received** : 07 Feb 2024
Lab Number : 06082221 **Tested** : 08 Feb 2024
Unique Number : 10869666 **Diagnosed** : 09 Feb 2024 - Jonathan Hester
Test Package : MOB 1 (Additional Tests: PercentFuel, TBN)

GE MARSHALL EXCAVATION
 1351 JOLIET RD
 VALPARAISO, IN
 US 46385
 Contact: MARK STEFFEL
 mark.steffel@gemarshall.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: