




OIL ANALYSIS REPORT

Sample Rating Trend

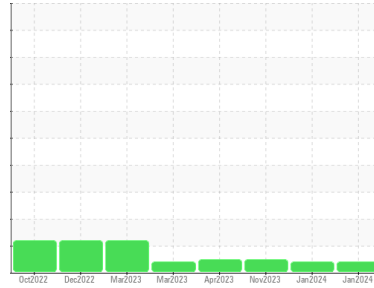

VISCOSITY



Machine Id
225069-23

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | GFL0100269 | GFL0100221 | GFL0100232 |
| Sample Date | Client Info | | 31 Jan 2024 | 10 Jan 2024 | 15 Nov 2023 |
| Machine Age | mls | Client Info | 227598 | 8368 | 227272 |
| Oil Age | mls | Client Info | 0 | 200 | 0 |
| Oil Changed | Client Info | | Not Chngd | Not Chngd | Not Chngd |
| Sample Status | | | ATTENTION | ATTENTION | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | WC Method | | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >100 | 14 | 56 | 8 |
| Chromium | ppm | ASTM D5185m >20 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m >2 | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185m >2 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m >2 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m >25 | 2 | 4 | 2 |
| Lead | ppm | ASTM D5185m >40 | 0 | <1 | <1 |
| Copper | ppm | ASTM D5185m >330 | 1 | 36 | 0 |
| Tin | ppm | ASTM D5185m >15 | <1 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m 0 | 19 | 59 | 17 |
| Barium | ppm | ASTM D5185m 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m 60 | 68 | 41 | 65 |
| Manganese | ppm | ASTM D5185m 0 | <1 | 6 | <1 |
| Magnesium | ppm | ASTM D5185m 1010 | 970 | 528 | 964 |
| Calcium | ppm | ASTM D5185m 1070 | 1002 | 1437 | 1042 |
| Phosphorus | ppm | ASTM D5185m 1150 | 1101 | 772 | 1037 |
| Zinc | ppm | ASTM D5185m 1270 | 1275 | 895 | 1231 |
| Sulfur | ppm | ASTM D5185m 2060 | 3116 | 2415 | 3035 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|----------------|----------|----------|
| Silicon | ppm | ASTM D5185m >25 | 4 | 23 | 4 |
| Sodium | ppm | ASTM D5185m | 3 | 6 | <1 |
| Potassium | ppm | ASTM D5185m >20 | 0 | 5 | <1 |
| Fuel | % | ASTM D3524 >5 | <1.0 | 1.1 | <1.0 |

INFRA-RED




| | method | limit/base | current | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 >3 | 0.1 | 0.1 | 0.1 |
| Nitration | Abs/cm | *ASTM D7624 >20 | 7.0 | 6.3 | 6.2 |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | 17.7 | 21.5 | 17.8 |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 >25 | 14.2 | 20.1 | 13.9 |
| Base Number (BN) | mg KOH/g | ASTM D2896 9.8 | 9.0 | 9.9 | 9.2 |







OIL ANALYSIS REPORT

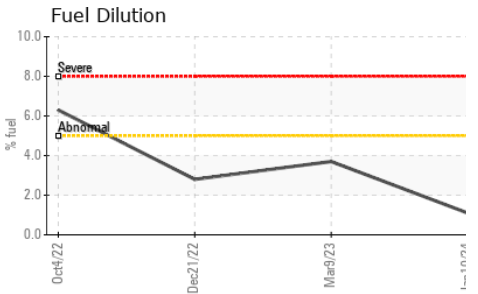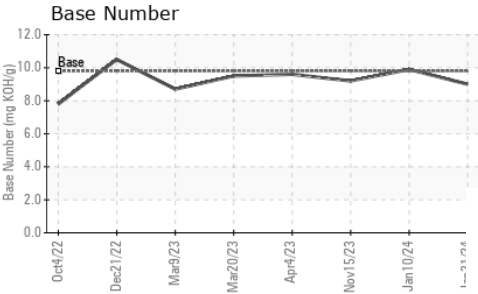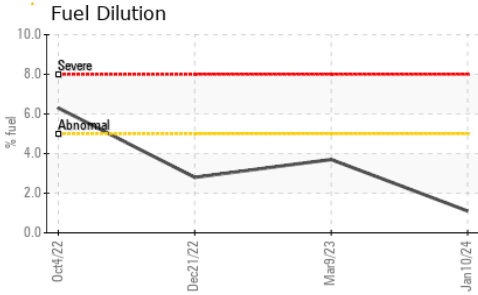

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | ▲ 11.9 | ▲ 11.1 |

GRAPHS

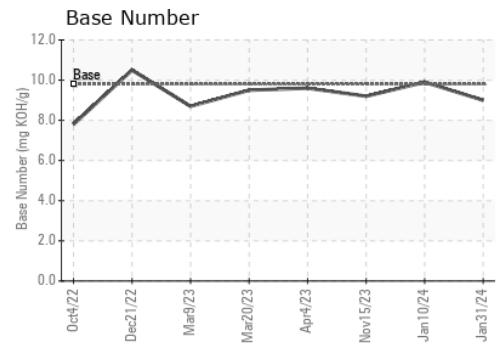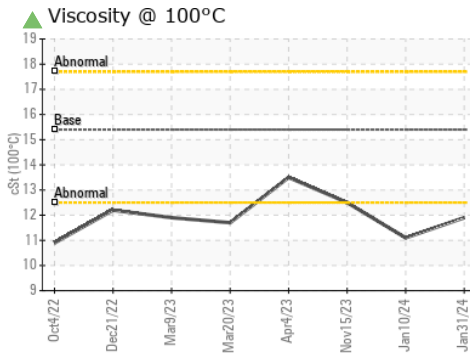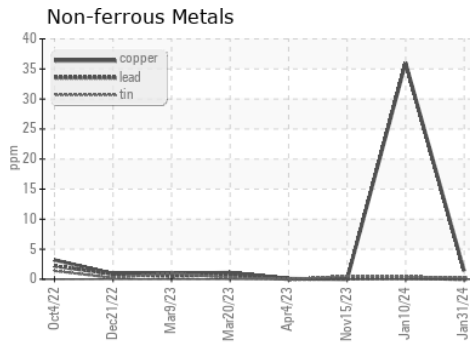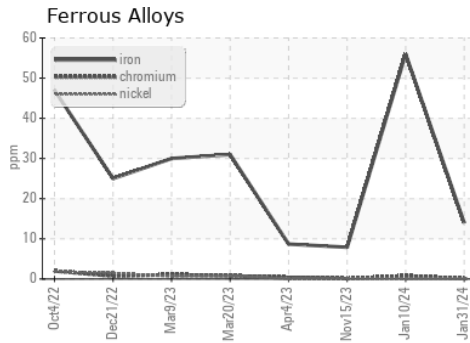

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0100269 **Received** : 07 Feb 2024
Lab Number : 06082309 **Tested** : 08 Feb 2024
Unique Number : 10869754 **Diagnosed** : 09 Feb 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: FuelDilution)

GFL Environmental - 166 - Phenix City
 18 Old Brickyard Rd
 Phenix City, AL
 US 36869
 Contact: DEAN PEACE JR
 dean.peace@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: