


OIL ANALYSIS REPORT

Sample Rating Trend



GLYCOL

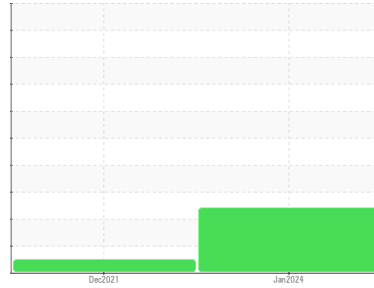

Machine Id

38

Component

Diesel Engine

Fluid

PETRO CANADA DURON XL SYN BLEND 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high. There is a moderate amount of fuel present in the oil. Test for glycol is negative.

Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0066384	PCA0053919	---
Sample Date	Client Info			24 Jan 2024	31 Dec 2021	---
Machine Age	mls	Client Info		365041	323386	---
Oil Age	mls	Client Info		20000	20000	---
Oil Changed	Client Info			Changed	Changed	---
Sample Status				ABNORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	35	42	---
Chromium	ppm	ASTM D5185m	>20	<1	2	---
Nickel	ppm	ASTM D5185m	>4	0	0	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	<1	---
Aluminum	ppm	ASTM D5185m	>20	7	4	---
Lead	ppm	ASTM D5185m	>40	<1	24	---
Copper	ppm	ASTM D5185m	>330	3	10	---
Tin	ppm	ASTM D5185m	>15	<1	2	---
Antimony	ppm	ASTM D5185m		---	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
Cadmium	ppm	ASTM D5185m		0	0	---





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	1	19	32	---
Barium	ppm	ASTM D5185m	1	0	0	---
Molybdenum	ppm	ASTM D5185m	60	53	6	---
Manganese	ppm	ASTM D5185m	1	<1	<1	---
Magnesium	ppm	ASTM D5185m	1010	816	707	---
Calcium	ppm	ASTM D5185m	1070	1089	1577	---
Phosphorus	ppm	ASTM D5185m	1150	1006	823	---
Zinc	ppm	ASTM D5185m	1270	1208	909	---
Sulfur	ppm	ASTM D5185m	2060	2804	2554	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	16	19	---
Sodium	ppm	ASTM D5185m		10	0	---
Potassium	ppm	ASTM D5185m	>20	▲ 41	16	---
Fuel	%	ASTM D3524	>5	▲ 6.6	<1.0	---
Glycol	%	*ASTM D2982		NEG	NEG	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.3	0.7	---
Nitration	Abs/cm	*ASTM D7624	>20	10.4	14.1	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.6	31.0	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.2	29.1	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.6	7.4	4.7	---









OIL ANALYSIS REPORT

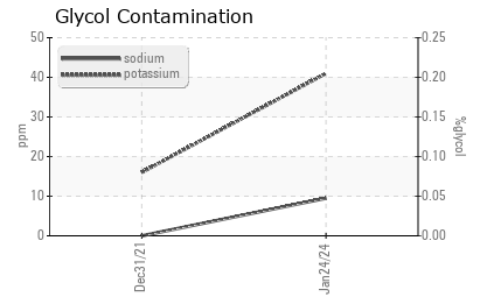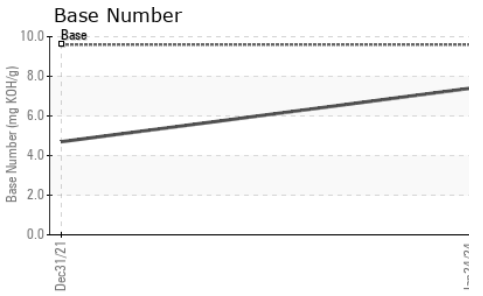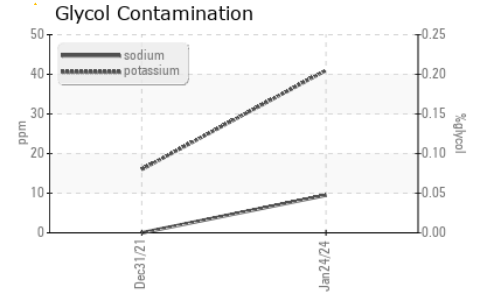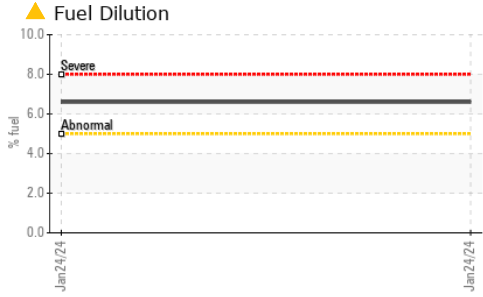

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.5	▲ 11.0	13.6

GRAPHS

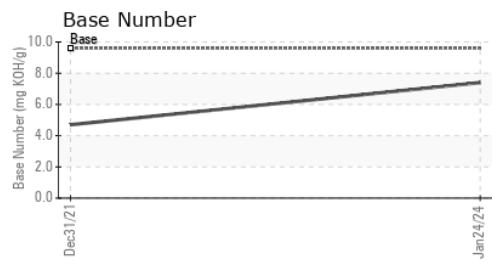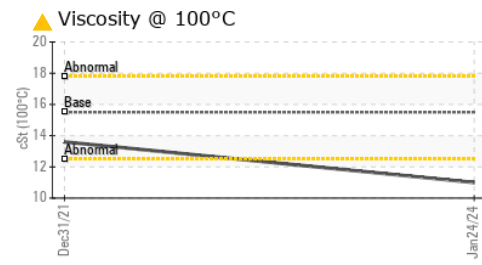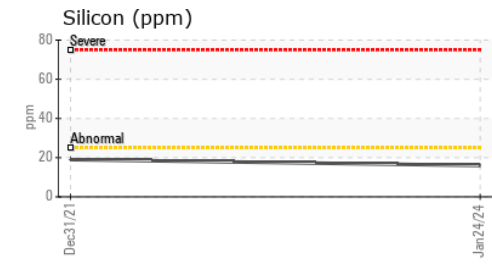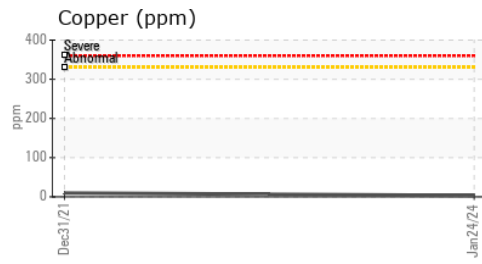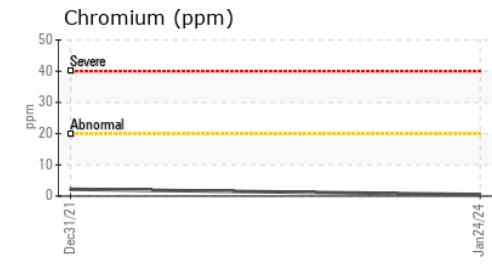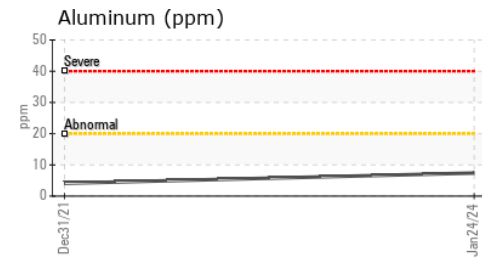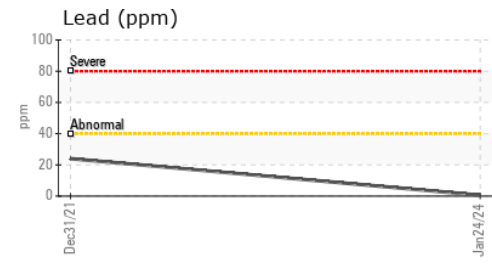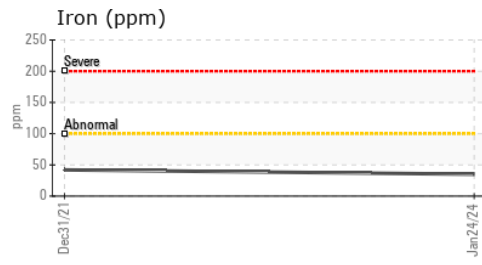

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0066384 **Received** : 07 Feb 2024
Lab Number : 06082947 **Tested** : 09 Feb 2024
Unique Number : 10870392 **Diagnosed** : 09 Feb 2024 - Jonathan Hester
Test Package : MOB 1 (Additional Tests: FuelDilution, Glycol, PercentFuel, TBN)

B & B HARVESTING
 2842 LADD RD
 MODESTO, CA
 US 95356
 Contact: Service Manager
 drcalvalley@gmail.com
 T: (209)545-8300
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)