


OIL ANALYSIS REPORT

Sample Rating Trend



FUEL

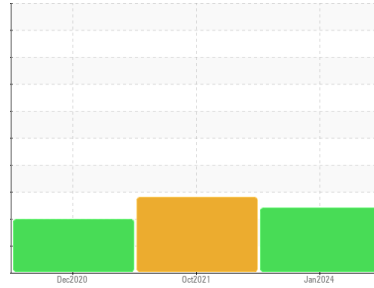

Machine Id
507
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of fuel present in the oil.

Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0105113	PCA0053878	PCA0020818
Sample Date	Client Info		19 Jan 2024	01 Oct 2021	03 Dec 2020
Machine Age	mls	Client Info	224727	167597	160311
Oil Age	mls	Client Info	7500	7500	7500
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			SEVERE	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	51	▲ 151	98
Chromium	ppm	ASTM D5185m >20	2	4	2
Nickel	ppm	ASTM D5185m >4	0	2	2
Titanium	ppm	ASTM D5185m	0	<1	<1
Silver	ppm	ASTM D5185m >3	0	1	<1
Aluminum	ppm	ASTM D5185m >20	9	▲ 60	▲ 34
Lead	ppm	ASTM D5185m >40	<1	3	0
Copper	ppm	ASTM D5185m >330	2	6	3
Tin	ppm	ASTM D5185m >15	0	<1	0
Antimony	ppm	ASTM D5185m	---	0	0
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<1	18	111
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	52	47	2
Manganese	ppm	ASTM D5185m 0	<1	2	1
Magnesium	ppm	ASTM D5185m 1010	832	731	103
Calcium	ppm	ASTM D5185m 1070	892	1260	2014
Phosphorus	ppm	ASTM D5185m 1150	861	947	896
Zinc	ppm	ASTM D5185m 1270	1053	1073	1042
Sulfur	ppm	ASTM D5185m 2060	2502	2588	2542

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	9	17	14
Sodium	ppm	ASTM D5185m	2	5	5
Potassium	ppm	ASTM D5185m >20	0	2	<1
Fuel	%	ASTM D3524 >5	● 13.7	▲ 6.1	▲ 5.2




INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.9	0.7	0.5
Nitration	Abs/cm	*ASTM D7624 >20	11.2	11.4	10.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	30.5	26.1	25.8

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	40.5	28.9	26
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	6.46	9.77	5.84









OIL ANALYSIS REPORT

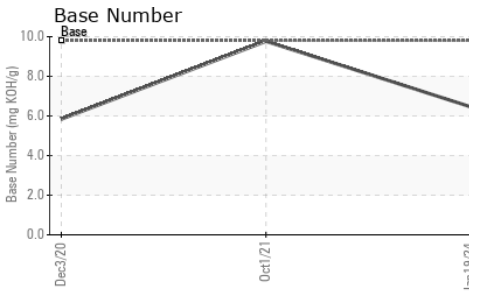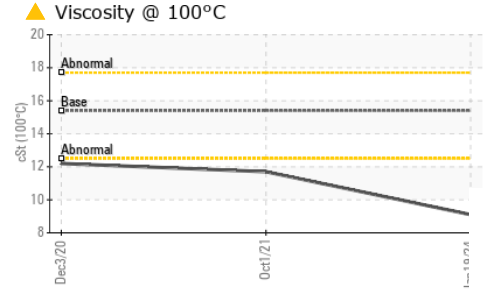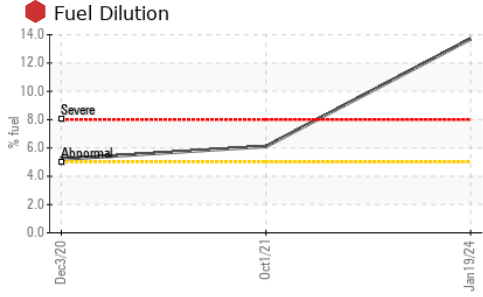

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	▲ 9.1	▲ 11.7	▲ 12.2

GRAPHS

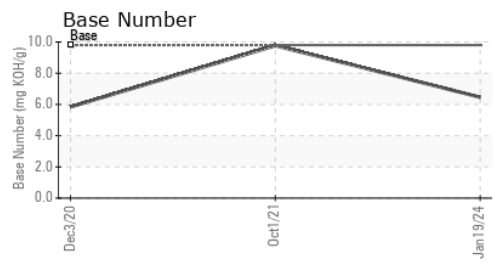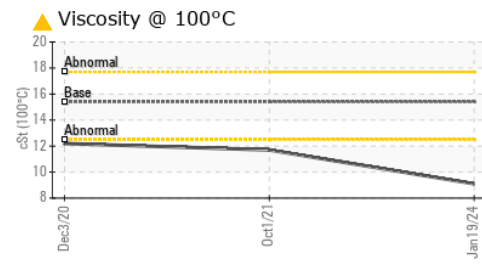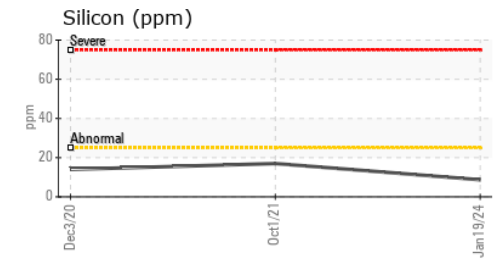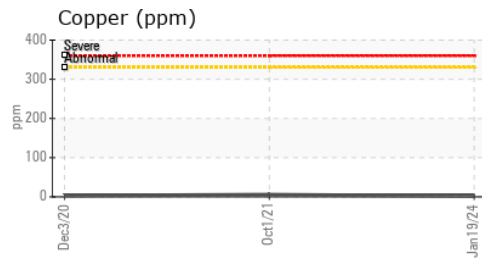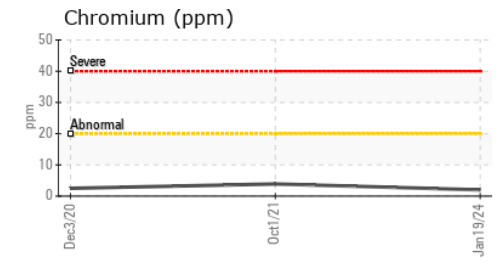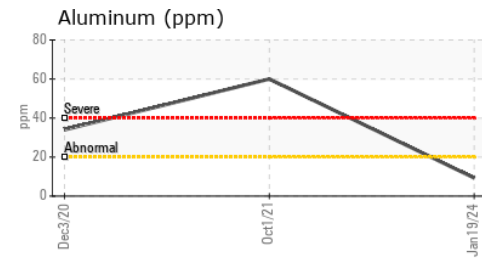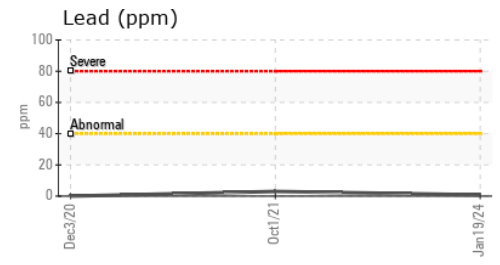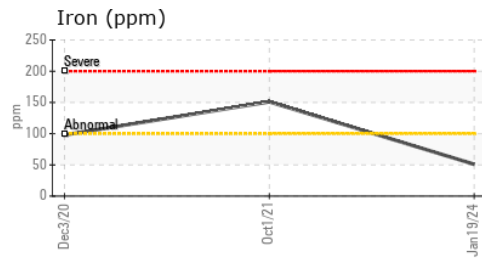

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0105113 **Received** : 07 Feb 2024
Lab Number : 06083154 **Tested** : 09 Feb 2024
Unique Number : 10870599 **Diagnosed** : 09 Feb 2024 - Sean Felton
Test Package : MOB 2 (Additional Tests: PercentFuel)

B & B HARVESTING
 2842 LADD RD
 MODESTO, CA
 US 95356
 Contact: Service Manager
 drcalvalley@gmail.com
 T: (209)545-8300
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)