




OIL ANALYSIS REPORT

Sample Rating Trend

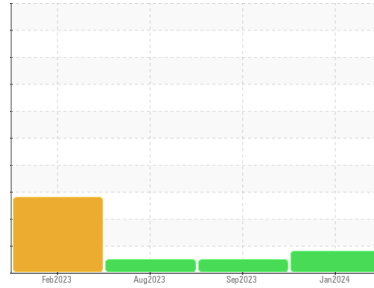

WEAR



Area
(56911Z)
Machine Id
913094
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (42 GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Valve wear is indicated. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0095956	GFL0095970	GFL0066949
Sample Date	Client Info	30 Jan 2024	20 Sep 2023	16 Aug 2023
Machine Age	hrs	2402	1780	1647
Oil Age	hrs	622	61	0
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	19	9	20
Chromium	ppm ASTM D5185m >20	1	0	<1
Nickel	ppm ASTM D5185m >5	▲ 11	0	1
Titanium	ppm ASTM D5185m >2	<1	0	0
Silver	ppm ASTM D5185m >2	0	0	<1
Aluminum	ppm ASTM D5185m >20	2	1	4
Lead	ppm ASTM D5185m >40	0	0	0
Copper	ppm ASTM D5185m >330	3	16	20
Tin	ppm ASTM D5185m >15	2	0	1
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	4	9	7
Barium	ppm ASTM D5185m 0	0	12	0
Molybdenum	ppm ASTM D5185m 60	60	59	67
Manganese	ppm ASTM D5185m 0	<1	0	<1
Magnesium	ppm ASTM D5185m 1010	939	891	1046
Calcium	ppm ASTM D5185m 1070	1062	1114	1279
Phosphorus	ppm ASTM D5185m 1150	996	977	1077
Zinc	ppm ASTM D5185m 1270	1202	1167	1396
Sulfur	ppm ASTM D5185m 2060	2691	3230	3369

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	4	6	5
Sodium	ppm ASTM D5185m	5	8	2
Potassium	ppm ASTM D5185m >20	4	20	3

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	0.8	0.3	0.8
Nitration	Abs/cm *ASTM D7624 >20	11.1	7.3	10.9
Sulfation	Abs/.1mm *ASTM D7415 >30	23.4	20.6	23.5


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	20.2	16.7	20.4
Base Number (BN)	mg KOH/g ASTM D2896 9.8	6.0	8.2	6.6




OIL ANALYSIS REPORT


▲ Ferrous Alloys

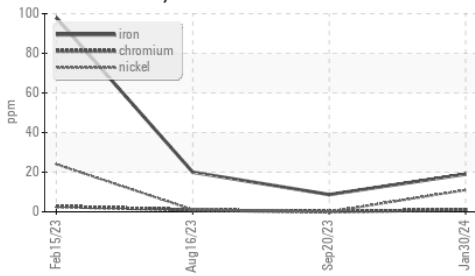

Base Number

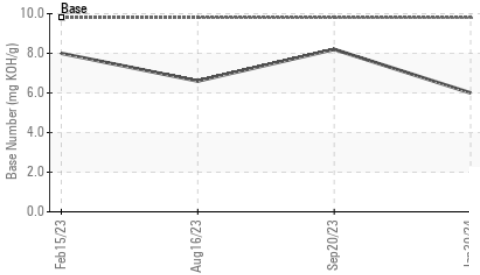

Viscosity @ 100°C

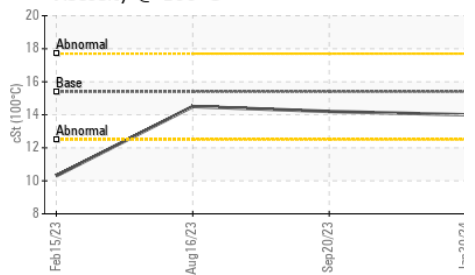


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.0	14.2

GRAPHS


▲ Ferrous Alloys

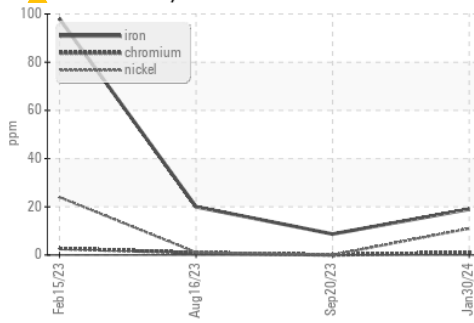


Non-ferrous Metals

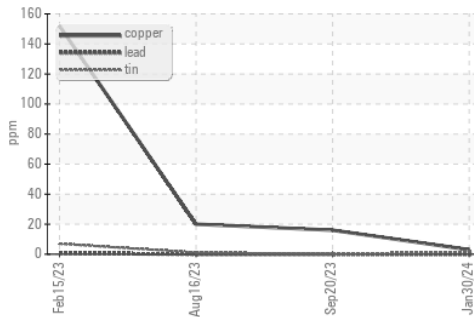

Viscosity @ 100°C

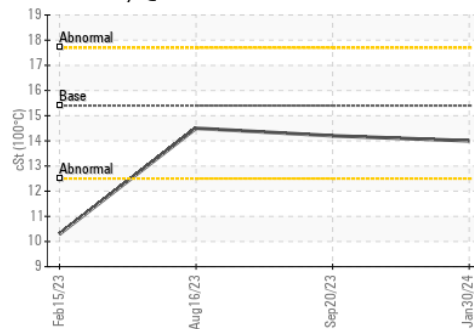

Base Number

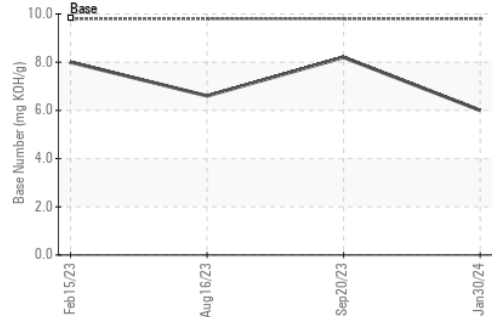

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0095956 **Received** : 08 Feb 2024
Lab Number : 06083289 **Tested** : 08 Feb 2024
Unique Number : 10870734 **Diagnosed** : 09 Feb 2024 - Don Baldrige
Test Package : FLEET

GFL Environmental - 916A - Suamico
 2300 Deerfield Ave E
 Suamico, WI
 US 54313
 Contact: NICHOLAS WEIDNER
 nweidner@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: