



OIL ANALYSIS REPORT

Sample Rating Trend



WEAR



Machine Id
INTERNATIONAL 223077

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

▲ Wear

Aluminum ppm levels are abnormal. Piston wear is indicated.

▲ Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0095379	---	---
Sample Date	Client Info	02 Feb 2024	---	---
Machine Age	hrs Client Info	3918	---	---
Oil Age	hrs Client Info	600	---	---
Oil Changed	Client Info	Changed	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	---	---
Glycol	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	48	---	---
Chromium	ppm ASTM D5185m >20	2	---	---
Nickel	ppm ASTM D5185m >4	2	---	---
Titanium	ppm ASTM D5185m	<1	---	---
Silver	ppm ASTM D5185m >3	0	---	---
Aluminum	ppm ASTM D5185m >20	▲ 26	---	---
Lead	ppm ASTM D5185m >40	<1	---	---
Copper	ppm ASTM D5185m >330	5	---	---
Tin	ppm ASTM D5185m >15	<1	---	---
Vanadium	ppm ASTM D5185m	<1	---	---
Cadmium	ppm ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	4	---	---
Barium	ppm ASTM D5185m 0	0	---	---
Molybdenum	ppm ASTM D5185m 60	55	---	---
Manganese	ppm ASTM D5185m 0	1	---	---
Magnesium	ppm ASTM D5185m 1010	764	---	---
Calcium	ppm ASTM D5185m 1070	1084	---	---
Phosphorus	ppm ASTM D5185m 1150	980	---	---
Zinc	ppm ASTM D5185m 1270	1110	---	---
Sulfur	ppm ASTM D5185m 2060	3142	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	4	---	---
Sodium	ppm ASTM D5185m	6	---	---
Potassium	ppm ASTM D5185m >20	0	---	---
Fuel	% ASTM D3524 >2.0	▲ 2.9	---	---

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.2	---	---
Nitration	Abs/cm *ASTM D7624 >20	8.9	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	19.0	---	---


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	15.6	---	---
Base Number (BN)	mg KOH/g ASTM D2896 9.8	9.9	---	---



OIL ANALYSIS REPORT


Fuel Dilution

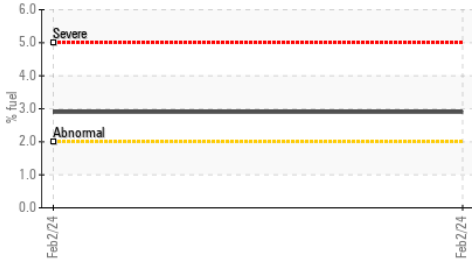


Aluminum (ppm)



Aluminum (ppm)

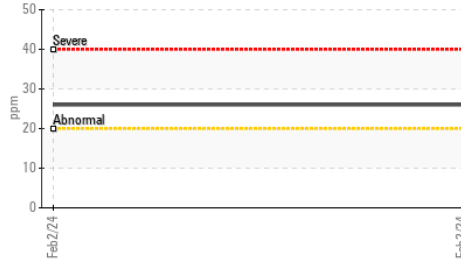





Base Number

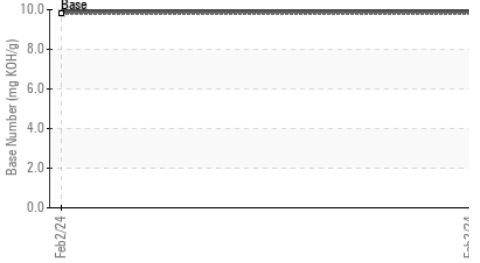

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 12.2	---	---

GRAPHS

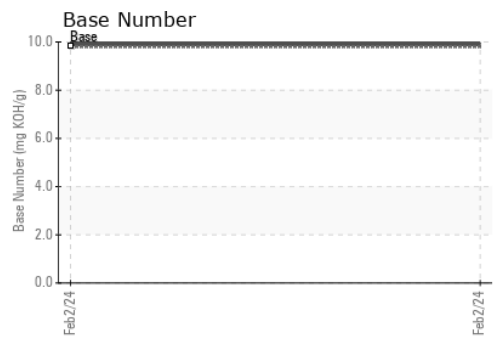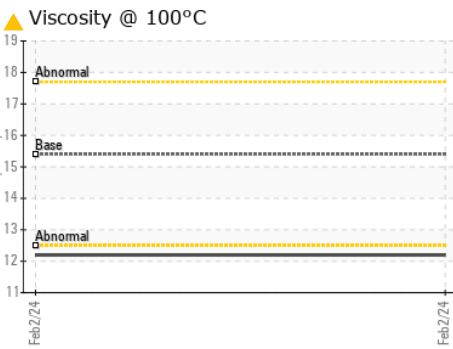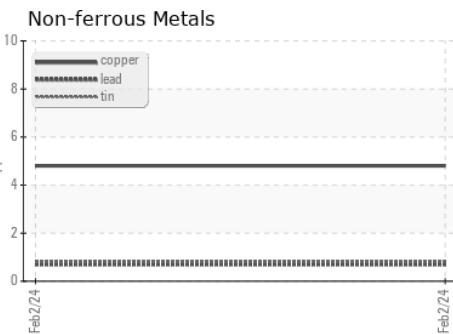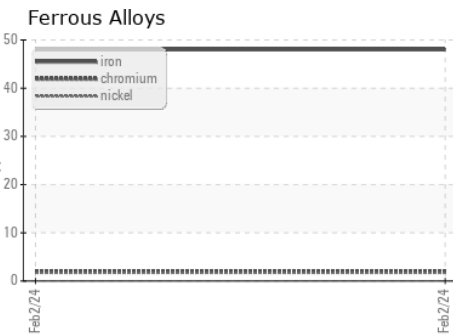

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0095379 Received : 08 Feb 2024
 Lab Number : 06083293 Tested : 09 Feb 2024
 Unique Number : 10870738 Diagnosed : 09 Feb 2024 - Wes Davis
 Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 982 - Texas City Hauling
 1004 4th Ave S
 Texas City, TX
 US 77590

Contact: COLLIN FERNANDEZ
 cfernandez@gflenv.com

T: (832)920-9305

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: