




# OIL ANALYSIS REPORT

Sample Rating Trend

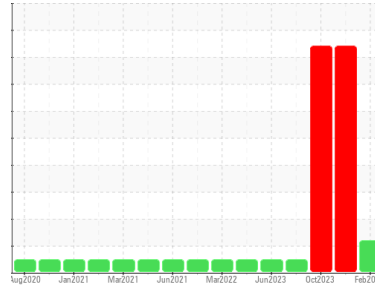

GLYCOL



Area  
**(26831XA)**

Machine Id  
**528006**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels remain elevated. Test for glycol is negative.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0058120</b>	GFL0101324	GFL0091753	
Sample Date	Client Info	<b>07 Feb 2024</b>	13 Jan 2024	28 Oct 2023	
Machine Age	hrs	Client Info	<b>14153</b>	14153	13686
Oil Age	hrs	Client Info	<b>13308</b>	13308	13686
Oil Changed	Client Info	<b>N/A</b>	Not Changd	Not Changd	
Sample Status		<b>ATTENTION</b>	SEVERE	SEVERE	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>9</b>	14	17
Chromium	ppm ASTM D5185m >20	<b>0</b>	0	<1
Nickel	ppm ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	<1	<1
Aluminum	ppm ASTM D5185m >20	<b>2</b>	3	2
Lead	ppm ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm ASTM D5185m >330	<b>2</b>	9	4
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>0</b>	0	2
Barium	ppm ASTM D5185m 0	<b>0</b>	0	20
Molybdenum	ppm ASTM D5185m 60	<b>64</b>	107	108
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	1	<1
Magnesium	ppm ASTM D5185m 1010	<b>913</b>	880	871
Calcium	ppm ASTM D5185m 1070	<b>1037</b>	960	937
Phosphorus	ppm ASTM D5185m 1150	<b>1010</b>	971	953
Zinc	ppm ASTM D5185m 1270	<b>1190</b>	1142	1116
Sulfur	ppm ASTM D5185m 2060	<b>2883</b>	2556	3632

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>5</b>	7	8
Sodium	ppm ASTM D5185m	<b>16</b>	▲ 93	▲ 94
Potassium	ppm ASTM D5185m >20	▲ <b>77</b>	▲ 504	▲ 465
Glycol	% *ASTM D2982	<b>NEG</b>	◆ 0.10	◆ 0.10

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.2</b>	0.5	0.3
Nitration	Abs/cm *ASTM D7624 >20	<b>7.2</b>	9.9	8.0
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.9</b>	21.2	19.1

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>14.7</b>	18.2	15.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.7</b>	6.5	8.3







# OIL ANALYSIS REPORT

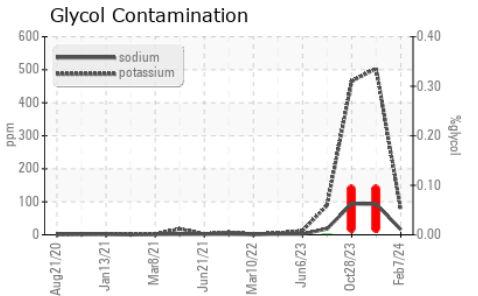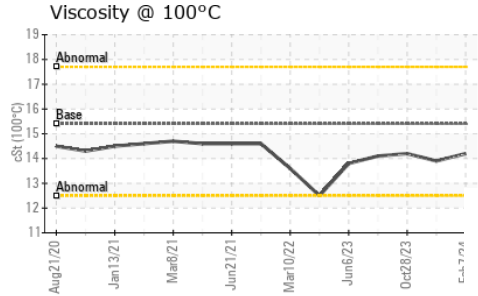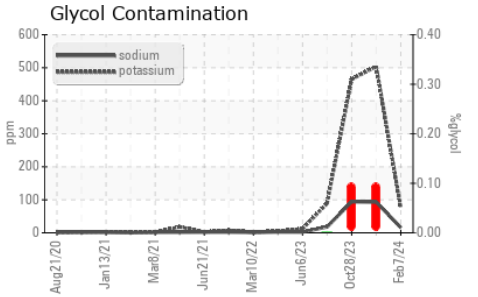

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.2</b>	13.9	14.2

## GRAPHS

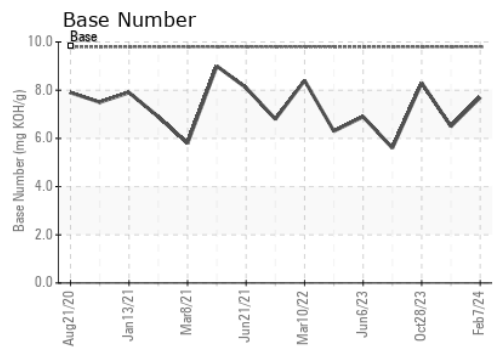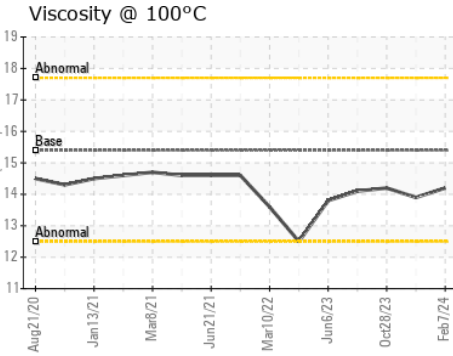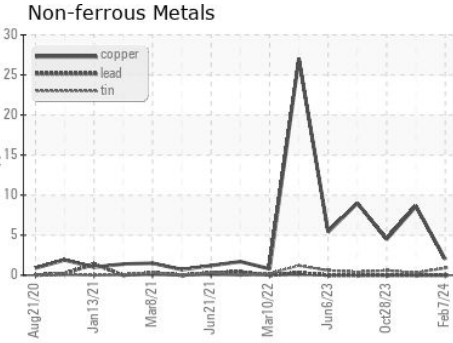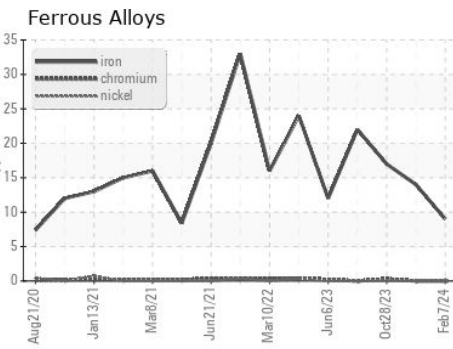

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0058120  
**Lab Number** : 06083296  
**Unique Number** : 10870741  
**Test Package** : FLEET

**Received** : 08 Feb 2024  
**Tested** : 12 Feb 2024  
**Diagnosed** : 12 Feb 2024 - Jonathan Hester

**GFL Environmental - 654 - Richmond Hauling**  
 11800 Lewis Road  
 Chester, VA  
 US 23831  
 Contact: Jimmy Mayes  
 jmayes@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: