


# OIL ANALYSIS REPORT

Sample Rating Trend

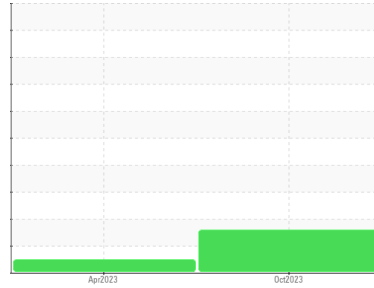

Machine Id  
**236423**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

## DIAGNOSIS

**Recommendation**  
 No corrective action is recommended at this time. Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. Elemental level of silicon (Si) above normal indicating ingress of seal material.

**Fluid Condition**  
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2 |
|---------------|-------------|-------------|--------------------|-------------|----------|
| Sample Number | Client Info |             | <b>PCA0110208</b>  | PCA0091414  | ---      |
| Sample Date   | Client Info |             | <b>28 Oct 2023</b> | 24 Apr 2023 | ---      |
| Machine Age   | mls         | Client Info | <b>11688</b>       | 0           | ---      |
| Oil Age       | mls         | Client Info | <b>11688</b>       | 10000       | ---      |
| Oil Changed   | Client Info |             | <b>Not Chngd</b>   | Changed     | ---      |
| Sample Status |             |             | <b>ABNORMAL</b>    | NORMAL      | ---      |

## CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >5         | <b>&lt;1.0</b> | <1.0     | ---      |
| Water  | WC Method | >0.2       | <b>NEG</b>     | NEG      | ---      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | ---      |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >100 | <b>61</b>    | 30       | ---      |
| Chromium | ppm    | ASTM D5185m >20  | <b>2</b>     | 1        | ---      |
| Nickel   | ppm    | ASTM D5185m >4   | <b>&lt;1</b> | <1       | ---      |
| Titanium | ppm    | ASTM D5185m      | <b>&lt;1</b> | 0        | ---      |
| Silver   | ppm    | ASTM D5185m >3   | <b>0</b>     | 0        | ---      |
| Aluminum | ppm    | ASTM D5185m >20  | <b>23</b>    | 10       | ---      |
| Lead     | ppm    | ASTM D5185m >40  | <b>&lt;1</b> | 0        | ---      |
| Copper   | ppm    | ASTM D5185m >330 | <b>29</b>    | 17       | ---      |
| Tin      | ppm    | ASTM D5185m >15  | <b>3</b>     | 2        | ---      |
| Vanadium | ppm    | ASTM D5185m      | <b>0</b>     | <1       | ---      |
| Cadmium  | ppm    | ASTM D5185m      | <b>&lt;1</b> | 0        | ---      |

## ADDITIVES

|            | method | limit/base       | current      | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 2    | <b>39</b>    | 60       | ---      |
| Barium     | ppm    | ASTM D5185m 0    | <b>&lt;1</b> | 0        | ---      |
| Molybdenum | ppm    | ASTM D5185m 50   | <b>49</b>    | 42       | ---      |
| Manganese  | ppm    | ASTM D5185m 0    | <b>9</b>     | 7        | ---      |
| Magnesium  | ppm    | ASTM D5185m 950  | <b>605</b>   | 550      | ---      |
| Calcium    | ppm    | ASTM D5185m 1050 | <b>1838</b>  | 1679     | ---      |
| Phosphorus | ppm    | ASTM D5185m 995  | <b>899</b>   | 838      | ---      |
| Zinc       | ppm    | ASTM D5185m 1180 | <b>1102</b>  | 1006     | ---      |
| Sulfur     | ppm    | ASTM D5185m 2600 | <b>3093</b>  | 3308     | ---      |

## CONTAMINANTS

|           | method | limit/base      | current     | history1 | history2 |
|-----------|--------|-----------------|-------------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25 | <b>▲ 37</b> | 13       | ---      |
| Sodium    | ppm    | ASTM D5185m     | <b>2</b>    | 5        | ---      |
| Potassium | ppm    | ASTM D5185m >20 | <b>71</b>   | 25       | ---      |






## INFRA-RED

|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >3  | <b>0.3</b>  | 0.2      | ---      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>7.7</b>  | 6.0      | ---      |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>22.6</b> | 22.3     | ---      |

## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>20.4</b> | 20.6     | ---      |
| Base Number (BN) | mg KOH/g | ASTM D2896      | <b>9.9</b>  | 10.0     | ---      |









# OIL ANALYSIS REPORT

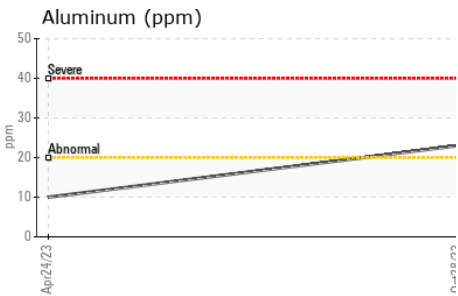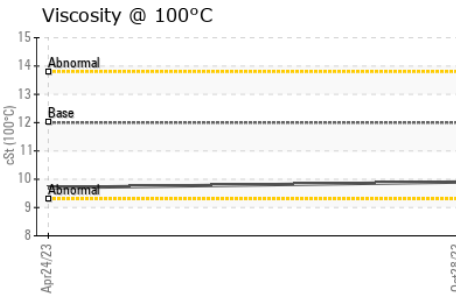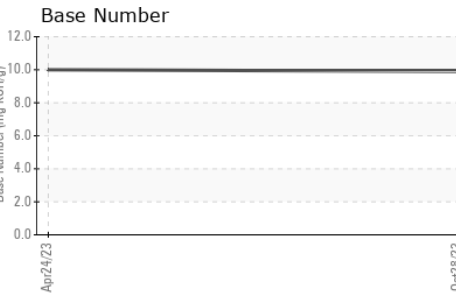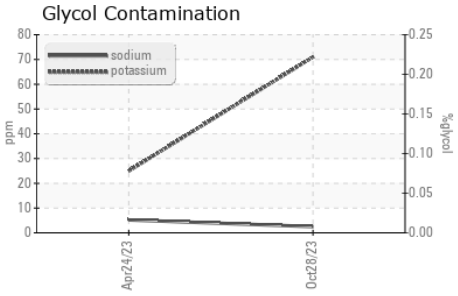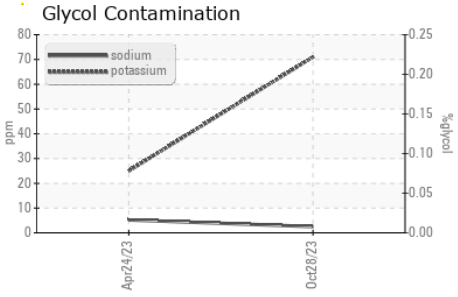

| PARAMETER        | VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|--------|------------|---------|----------|----------|
| White Metal      | None   | scalar | *Visual    | NONE    | NONE     | ---      |
| Yellow Metal     | None   | scalar | *Visual    | NONE    | NONE     | ---      |
| Precipitate      | None   | scalar | *Visual    | NONE    | NONE     | ---      |
| Silt             | None   | scalar | *Visual    | NONE    | NONE     | ---      |
| Debris           | None   | scalar | *Visual    | NONE    | NONE     | ---      |
| Sand/Dirt        | None   | scalar | *Visual    | NONE    | NONE     | ---      |
| Appearance       | NORML  | scalar | *Visual    | NORML   | NORML    | ---      |
| Odor             | NORML  | scalar | *Visual    | NORML   | NORML    | ---      |
| Emulsified Water | NEG    | scalar | *Visual    | >0.2    | NEG      | ---      |
| Free Water       | NEG    | scalar | *Visual    | ---     | NEG      | ---      |

| PARAMETER    | method | limit/base | current | history1   | history2 |     |
|--------------|--------|------------|---------|------------|----------|-----|
| Visc @ 100°C | cSt    | ASTM D445  | 12.00   | <b>9.9</b> | 9.7      | --- |

## GRAPHS

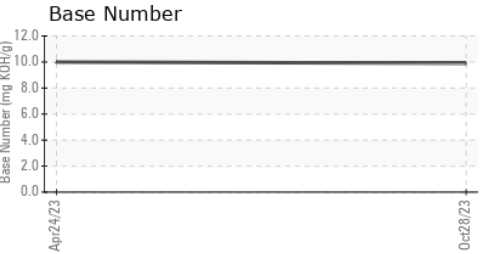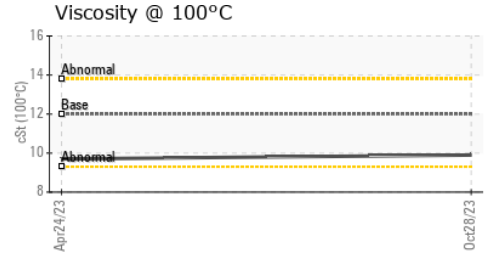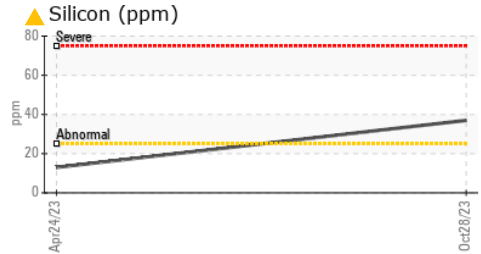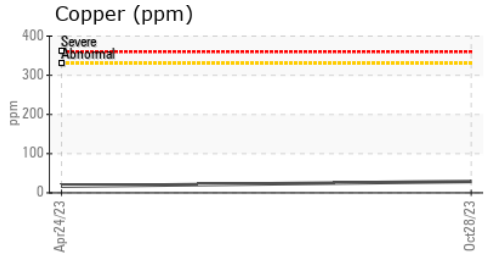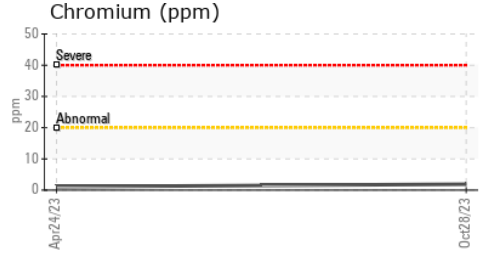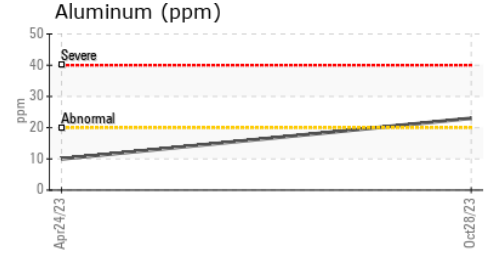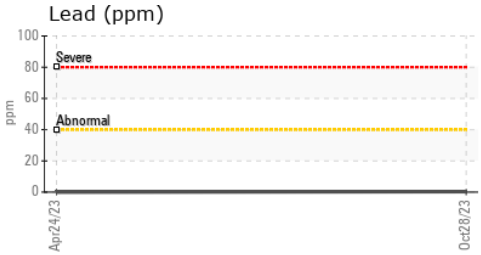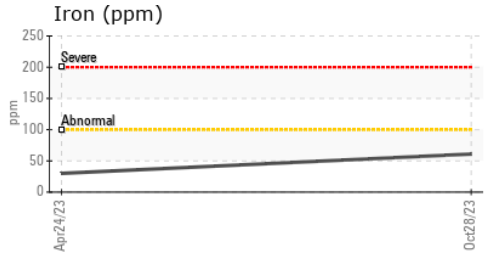

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0110208 **Received** : 08 Feb 2024  
**Lab Number** : 06083401 **Tested** : 09 Feb 2024  
**Unique Number** : 10870846 **Diagnosed** : 09 Feb 2024 - Don Baldrige  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #121**  
 107 HOW LANE  
 NEW BRUNSWICK, NJ  
 US 08901  
 Contact: Anthony Cursi  
 acursi@millertransgroup.com  
 T: (732)358-4027  
 F: (732)400-8475

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)