


OIL ANALYSIS REPORT

Sample Rating Trend



WEAR

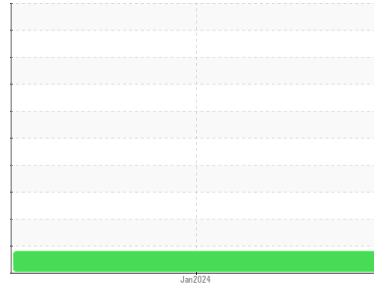

Machine Id
MH-88
 Component
Left Swing Drive
 Fluid
GEAR OIL LS 80W90 (--- GAL)

DIAGNOSIS

▲ Recommendation

The oil change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

Gear wear is indicated. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0112770	---	---
Sample Date	Client Info		24 Jan 2024	---	---
Machine Age	hrs	Client Info	4819	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >400	▲ 436	---	---
Chromium	ppm	ASTM D5185m >10	4	---	---
Nickel	ppm	ASTM D5185m >10	<1	---	---
Titanium	ppm	ASTM D5185m	<1	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m >25	1	---	---
Lead	ppm	ASTM D5185m >50	<1	---	---
Copper	ppm	ASTM D5185m >200	69	---	---
Tin	ppm	ASTM D5185m >10	7	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	<1	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 150	16	---	---
Barium	ppm	ASTM D5185m	2	---	---
Molybdenum	ppm	ASTM D5185m	<1	---	---
Manganese	ppm	ASTM D5185m	5	---	---
Magnesium	ppm	ASTM D5185m 10	<1	---	---
Calcium	ppm	ASTM D5185m 70	6	---	---
Phosphorus	ppm	ASTM D5185m 2000	347	---	---
Zinc	ppm	ASTM D5185m 50	51	---	---
Sulfur	ppm	ASTM D5185m 20000	5857	---	---



CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	3	---	---
Sodium	ppm	ASTM D5185m	0	---	---
Potassium	ppm	ASTM D5185m >20	3	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.56	---	---

OIL ANALYSIS REPORT







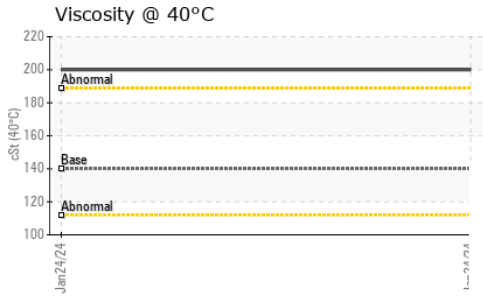
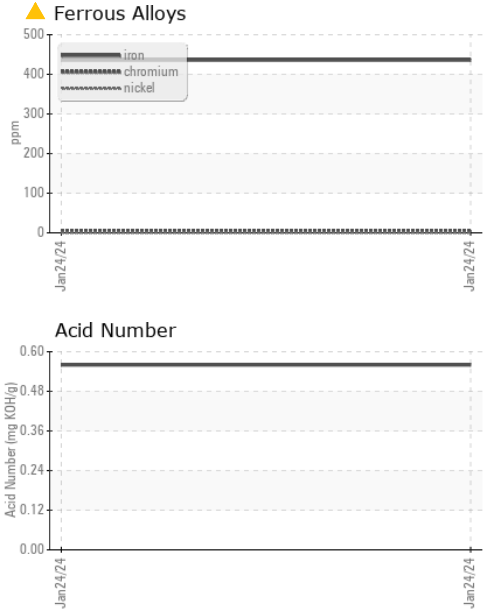


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	140	200	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

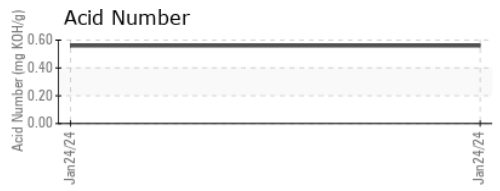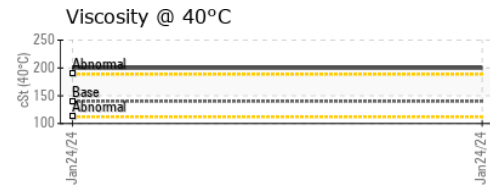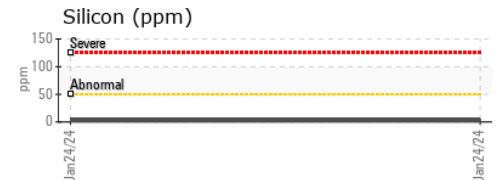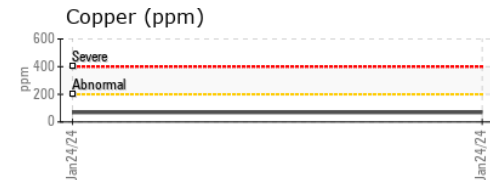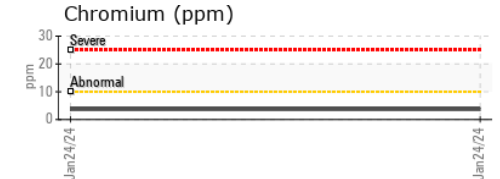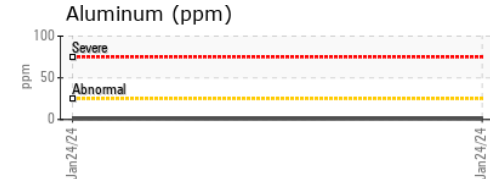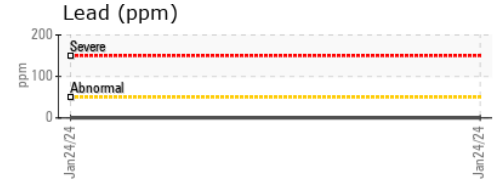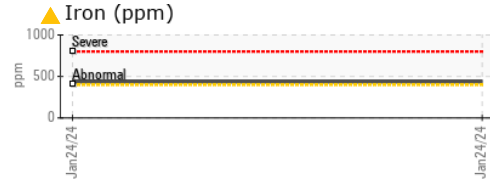

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0112770 **Received** : 08 Feb 2024
Lab Number : 06083795 **Tested** : 09 Feb 2024
Unique Number : 10871240 **Diagnosed** : 11 Feb 2024 - Don Baldrige
Test Package : MOB 2

SCRAP METAL SERVICES (SMS Mill Services LLC)
 1500 COMMERCIAL AVE
 MINGO JUNCTION, OH
 US 43938
 Contact: FRANK NALLY
 fnally@scrapmetalservices.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)