

# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id  
**MH-90**  
 Component  
**Left Swing Drive**  
 Fluid  
**GEAR OIL LS 80W90 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0112767</b>	---	---
Sample Date	Client Info	<b>25 Jan 2024</b>	---	---
Machine Age	hrs Client Info	<b>5249</b>	---	---
Oil Age	hrs Client Info	<b>2249</b>	---	---
Oil Changed	Client Info	<b>Changed</b>	---	---
Sample Status		<b>NORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >400	<b>145</b>	---	---
Chromium	ppm ASTM D5185m >10	<b>&lt;1</b>	---	---
Nickel	ppm ASTM D5185m >10	<b>&lt;1</b>	---	---
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm ASTM D5185m >25	<b>1</b>	---	---
Lead	ppm ASTM D5185m >50	<b>&lt;1</b>	---	---
Copper	ppm ASTM D5185m >200	<b>185</b>	---	---
Tin	ppm ASTM D5185m >10	<b>15</b>	---	---
Vanadium	ppm ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 150	<b>41</b>	---	---
Barium	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Molybdenum	ppm ASTM D5185m	<b>2</b>	---	---
Manganese	ppm ASTM D5185m	<b>1</b>	---	---
Magnesium	ppm ASTM D5185m 10	<b>15</b>	---	---
Calcium	ppm ASTM D5185m 70	<b>119</b>	---	---
Phosphorus	ppm ASTM D5185m 2000	<b>551</b>	---	---
Zinc	ppm ASTM D5185m 50	<b>181</b>	---	---
Sulfur	ppm ASTM D5185m 20000	<b>7225</b>	---	---


## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >50	<b>1</b>	---	---
Sodium	ppm ASTM D5185m	<b>0</b>	---	---
Potassium	ppm ASTM D5185m >20	<b>2</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	<b>0.82</b>	---	---

# OIL ANALYSIS REPORT

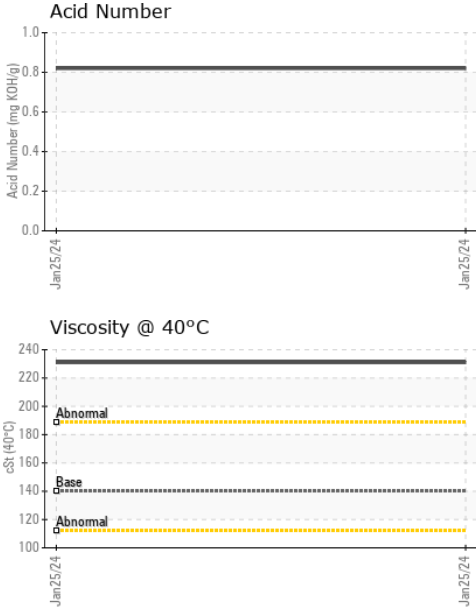


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	140	<b>231</b>	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

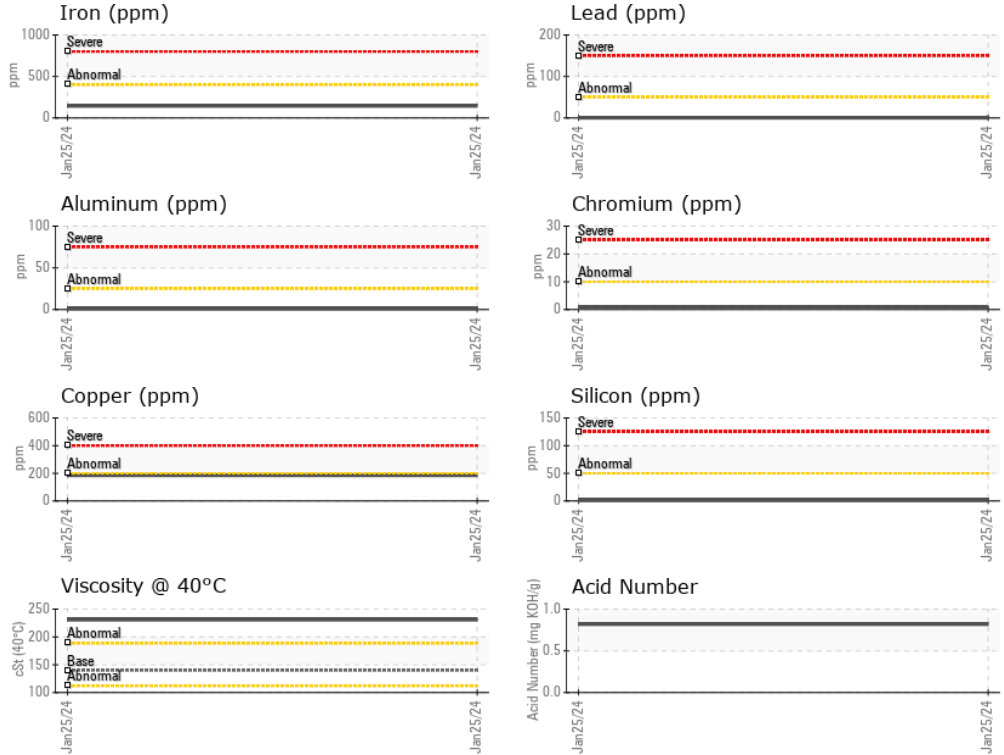

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0112767  
**Lab Number** : 06083798  
**Unique Number** : 10871243  
**Test Package** : MOB 2  
**Received** : 08 Feb 2024  
**Tested** : 09 Feb 2024  
**Diagnosed** : 11 Feb 2024 - Don Baldrige

**SCRAP METAL SERVICES (SMS Mill Services LLC)**  
 1500 COMMERCIAL AVE  
 MINGO JUNCTION, OH  
 US 43938  
 Contact: STAN MANN  
 smann@scrapmetalservices.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: