


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

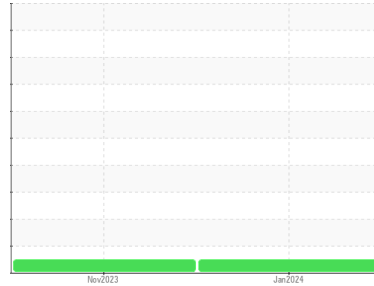

Area  
**(P1021288) Dixon Transport-Tractor**  
 Machine Id  
**[Dixon Transport-Tractor] 325A325549**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0114338</b>	PCA0109481	---
Sample Date	Client Info			<b>26 Jan 2024</b>	03 Nov 2023	---
Machine Age	mls	Client Info		<b>474505</b>	455197	---
Oil Age	mls	Client Info		<b>19308</b>	33994	---
Oil Changed	Client Info			<b>Not Chngd</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	<b>14</b>	19	---
Chromium	ppm	ASTM D5185m	>5	<b>2</b>	2	---
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	1	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>30	<b>6</b>	4	---
Lead	ppm	ASTM D5185m	>30	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m	>150	<b>4</b>	6	---
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	---



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>9</b>	<1	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	9	---
Molybdenum	ppm	ASTM D5185m	50	<b>61</b>	61	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	950	<b>959</b>	950	---
Calcium	ppm	ASTM D5185m	1050	<b>1100</b>	1188	---
Phosphorus	ppm	ASTM D5185m	995	<b>1018</b>	1008	---
Zinc	ppm	ASTM D5185m	1180	<b>1222</b>	1267	---
Sulfur	ppm	ASTM D5185m	2600	<b>2932</b>	3050	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>4</b>	6	---
Sodium	ppm	ASTM D5185m		<b>2</b>	0	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	4	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.7</b>	9.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.3</b>	21.6	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.9</b>	18.3	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>5.7</b>	6.5	---





# OIL ANALYSIS REPORT

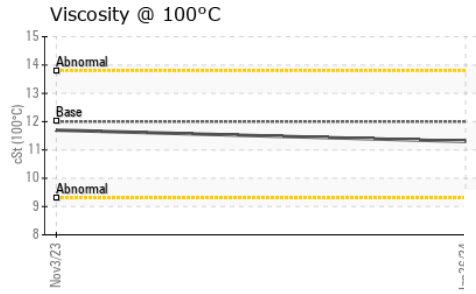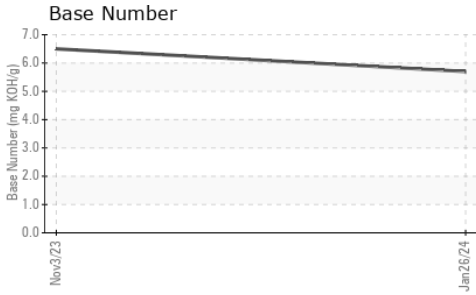

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual		<b>NEG</b>	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.3</b>	11.7	---

## GRAPHS

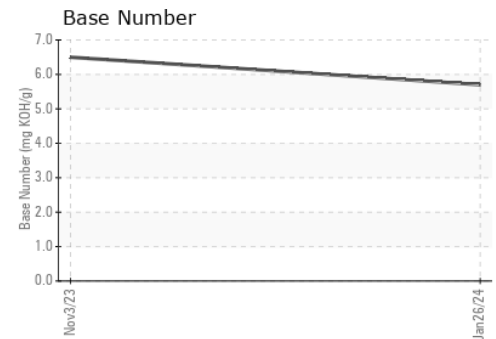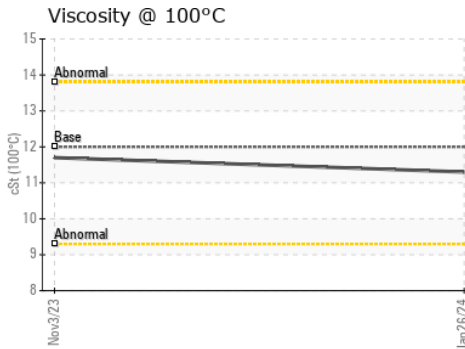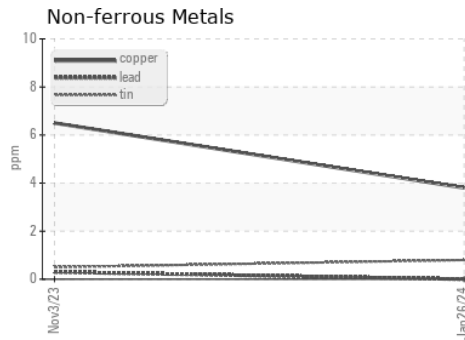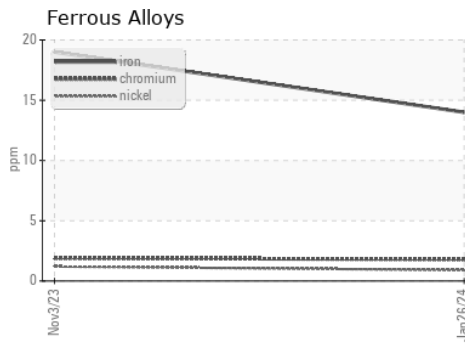

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0114338  
**Lab Number** : **06084455**  
**Unique Number** : 10871900  
**Test Package** : FLEET

**Received** : 09 Feb 2024  
**Tested** : 09 Feb 2024  
**Diagnosed** : 09 Feb 2024 - Wes Davis

**Transervice - Shop 3250 - Dixon Transport**  
 1124 E. River Road  
 Dixon, IL  
 US 61021  
 Contact: Mike Shoemaker  
 Shop3250@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: