

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
(P1021281) Dixon Transport-Tractor
 Machine Id
[Dixon Transport-Tractor] 325A325542
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-----------------|--------------------|----------|----------|
| Sample Number | Client Info | PCA0114336 | --- | --- |
| Sample Date | Client Info | 02 Feb 2024 | --- | --- |
| Machine Age | mls Client Info | 409028 | --- | --- |
| Oil Age | mls Client Info | 41928 | --- | --- |
| Oil Changed | Client Info | Changed | --- | --- |
| Sample Status | | NORMAL | --- | --- |

CONTAMINATION

| method | limit/base | current | history1 | history2 |
|--------|----------------|----------------|----------|----------|
| Fuel | WC Method >5 | <1.0 | --- | --- |
| Water | WC Method >0.2 | NEG | --- | --- |
| Glycol | WC Method | NEG | --- | --- |

WEAR METALS

| method | limit/base | current | history1 | history2 |
|----------|----------------------|--------------|----------|----------|
| Iron | ppm ASTM D5185m >80 | 29 | --- | --- |
| Chromium | ppm ASTM D5185m >5 | 3 | --- | --- |
| Nickel | ppm ASTM D5185m >2 | <1 | --- | --- |
| Titanium | ppm ASTM D5185m | <1 | --- | --- |
| Silver | ppm ASTM D5185m >3 | 0 | --- | --- |
| Aluminum | ppm ASTM D5185m >30 | 12 | --- | --- |
| Lead | ppm ASTM D5185m >30 | 0 | --- | --- |
| Copper | ppm ASTM D5185m >150 | 4 | --- | --- |
| Tin | ppm ASTM D5185m >5 | 1 | --- | --- |
| Vanadium | ppm ASTM D5185m | <1 | --- | --- |
| Cadmium | ppm ASTM D5185m | 0 | --- | --- |

ADDITIVES

| method | limit/base | current | history1 | history2 |
|------------|----------------------|--------------|----------|----------|
| Boron | ppm ASTM D5185m 2 | <1 | --- | --- |
| Barium | ppm ASTM D5185m 0 | 0 | --- | --- |
| Molybdenum | ppm ASTM D5185m 50 | 63 | --- | --- |
| Manganese | ppm ASTM D5185m 0 | <1 | --- | --- |
| Magnesium | ppm ASTM D5185m 950 | 1034 | --- | --- |
| Calcium | ppm ASTM D5185m 1050 | 1144 | --- | --- |
| Phosphorus | ppm ASTM D5185m 995 | 1077 | --- | --- |
| Zinc | ppm ASTM D5185m 1180 | 1302 | --- | --- |
| Sulfur | ppm ASTM D5185m 2600 | 2749 | --- | --- |

CONTAMINANTS

| method | limit/base | current | history1 | history2 |
|-----------|---------------------|--------------|----------|----------|
| Silicon | ppm ASTM D5185m >20 | 6 | --- | --- |
| Sodium | ppm ASTM D5185m | 3 | --- | --- |
| Potassium | ppm ASTM D5185m >20 | <1 | --- | --- |



INFRA-RED

| method | limit/base | current | history1 | history2 |
|-----------|--------------------------|-------------|----------|----------|
| Soot % | % *ASTM D7844 >3 | 0.8 | --- | --- |
| Nitration | Abs/cm *ASTM D7624 >20 | 10.7 | --- | --- |
| Sulfation | Abs/.1mm *ASTM D7415 >30 | 23.7 | --- | --- |

FLUID DEGRADATION

| method | limit/base | current | history1 | history2 |
|------------------|--------------------------|-------------|----------|----------|
| Oxidation | Abs/.1mm *ASTM D7414 >25 | 20.8 | --- | --- |
| Base Number (BN) | mg KOH/g ASTM D2896 | 5.3 | --- | --- |





OIL ANALYSIS REPORT

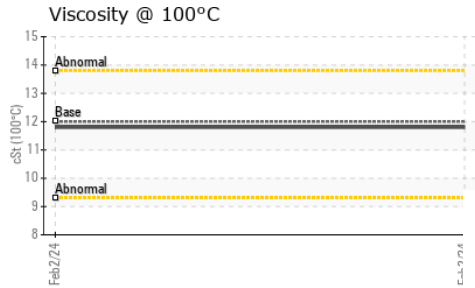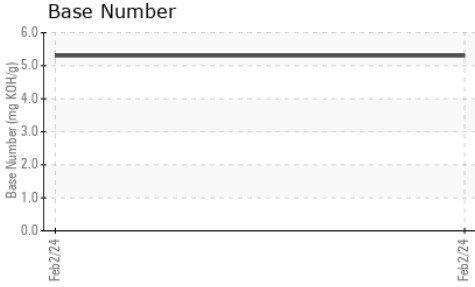

| VISUAL | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|----------|----------|-----|
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- | --- |
| Free Water | scalar | *Visual | | NEG | --- | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|----------|----------|-----|
| Visc @ 100°C | cSt | ASTM D445 | 12.00 | 11.8 | --- | --- |

GRAPHS

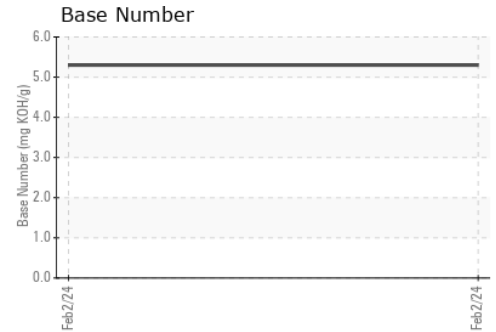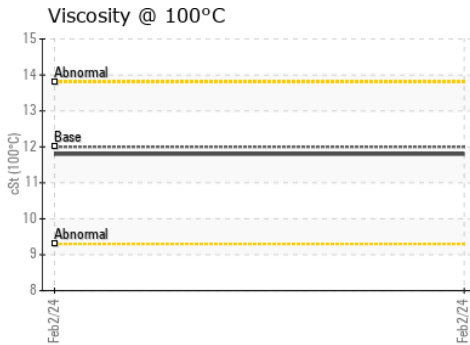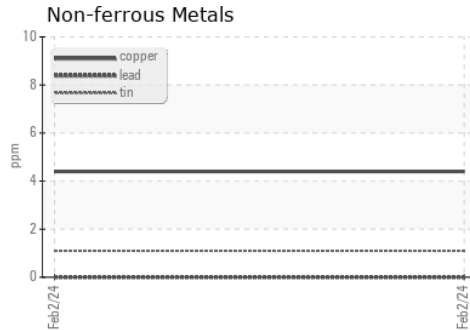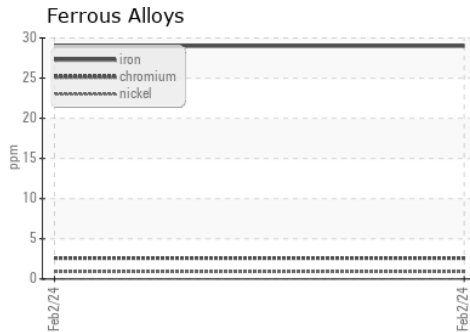

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0114336
Lab Number : 06084458
Unique Number : 10871903
Test Package : FLEET

Received : 09 Feb 2024
Tested : 09 Feb 2024
Diagnosed : 09 Feb 2024 - Wes Davis

Transervice - Shop 3250 - Dixon Transport
 1124 E. River Road
 Dixon, IL
 US 61021
 Contact: Mike Shoemaker
 Shop3250@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: