


# **OIL ANALYSIS REPORT**

# (65222Z) Walgreens - Tractor [Walgreens - Tractor] 136A624195

**Diesel Engine** 

PETRO CANADA DURON SHP 10W30 (11 GAL)





## DIAGNOSIS

#### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

# Wear

Metal levels are typical for a new component breaking in.

#### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.


### **Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

GAL)			Nov2023	Jan2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0103579	PCA0103504	
Sample Date		Client Info		22 Jan 2024	14 Nov 2023	
Machine Age	mls	Client Info		64031	33459	
Oil Age	mls	Client Info		60000	33459	
Oil Changed		Client Info		Changed	Not Changd	
Sample Status				NORMAL	NORMAL	
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	
Water		WC Method	>0.2	NEG	NEG	
Glycol		WC Method		NEG	NEG	
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	55	30	
Chromium	ppm	ASTM D5185m	>5	4	3	
Nickel	ppm	ASTM D5185m	>2	2	<1	
Titanium	ppm	ASTM D5185m		<1	0	
Silver	ppm	ASTM D5185m	>3	0	0	
Aluminum	ppm	ASTM D5185m	>30	108	68	
Lead	ppm	ASTM D5185m	>30	1	2	
Copper	ppm	ASTM D5185m	>150	195	156	
Tin	ppm	ASTM D5185m	>5	9	7	
Vanadium	ppm	ASTM D5185m		<1	<1	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	28	24	
Barium	ppm	ASTM D5185m	0	0	0	
Molybdenum	ppm	ASTM D5185m	50	41	36	
Manganese	ppm	ASTM D5185m	0	4	3	
Magnesium	ppm	ASTM D5185m	950	586	538	
Calcium	ppm	ASTM D5185m	1050	1690	1608	
Phosphorus	ppm	ASTM D5185m	995	727	735	
Zinc	ppm	ASTM D5185m	1180	884	826	
Sulfur	ppm	ASTM D5185m	2600	1848	1831	
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	7	6	
Sodium	ppm	ASTM D5185m		7	5	
Potassium	ppm	ASTM D5185m	>20	224	154	
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.4	0.2	
Nitration	Abs/cm	*ASTM D7624	>20	11.1	9.4	
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.1	22.5	
FLUID DEGRAI	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	26.5	23.5	
Base Number (BN)	mg KOH/g	ASTM D2896		3.0	7.5	



# **OIL ANALYSIS REPORT**

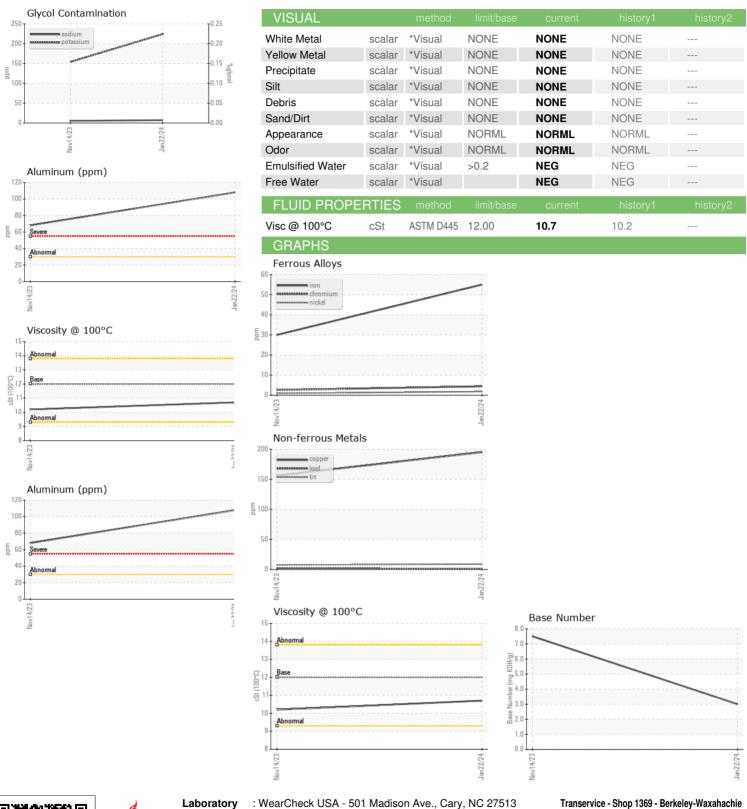



Certificate L2367

Laboratory Sample No.

Lab Number : 06084467 **Unique Number** : 10871912 Test Package : FLEET

: PCA0103579 Received

**Tested** Diagnosed

: 09 Feb 2024 : 09 Feb 2024

: 12 Feb 2024 - Don Baldridge

Transervice - Shop 1369 - Berkeley-Waxahachie 710 Ovilla Road Waxahachie, TX

US 75167 Contact: Robert Beal

rbeal@transervice.com T: (972)923-9928

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (972)923-9919 Contact/Location: Robert Beal - TSV1369