




OIL ANALYSIS REPORT

Sample Rating Trend

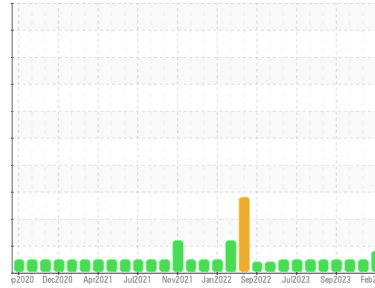

FUEL



Machine Id
CUMMINS 810030

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (28 QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0109083	GFL0109100	GFL0109062
Sample Date	Client Info	02 Feb 2024	11 Jan 2024	05 Jan 2024
Machine Age	hrs	15987	15837	15744
Oil Age	hrs	10655	15837	15744
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		MARGINAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >75	10	35	6
Chromium	ppm	ASTM D5185m >5	<1	1	<1
Nickel	ppm	ASTM D5185m >4	0	0	<1
Titanium	ppm	ASTM D5185m >2	<1	0	<1
Silver	ppm	ASTM D5185m >2	0	<1	0
Aluminum	ppm	ASTM D5185m >15	2	5	2
Lead	ppm	ASTM D5185m >25	0	0	<1
Copper	ppm	ASTM D5185m >100	<1	6	1
Tin	ppm	ASTM D5185m >4	<1	<1	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	16	16	19
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	57	60	57
Manganese	ppm	ASTM D5185m 0	<1	1	<1
Magnesium	ppm	ASTM D5185m 1010	673	795	704
Calcium	ppm	ASTM D5185m 1070	1048	1046	1097
Phosphorus	ppm	ASTM D5185m 1150	878	957	772
Zinc	ppm	ASTM D5185m 1270	1046	1132	1089
Sulfur	ppm	ASTM D5185m 2060	2594	2774	2862

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	3	9	4
Sodium	ppm	ASTM D5185m	4	7	0
Potassium	ppm	ASTM D5185m >20	2	2	3
Fuel	%	ASTM D3524 >3.0	▲ 2.1	<1.0	<1.0

INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >6	0.5	0.8	0.3
Nitration	Abs/cm	*ASTM D7624 >20	8.7	8.4	7.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.6	18.3	17.7


FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.9	13.5	13.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	6.7	7.1	7.4




OIL ANALYSIS REPORT


Fuel Dilution

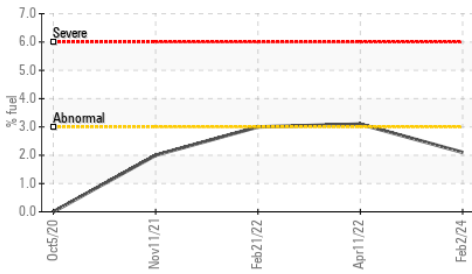

Base Number

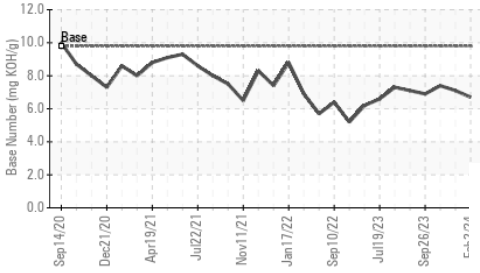

Viscosity @ 100°C

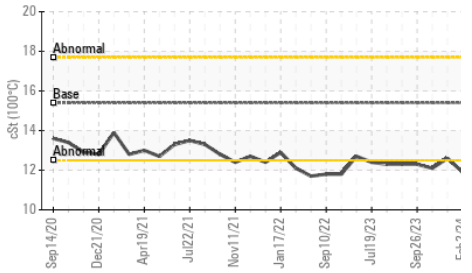


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	11.9	12.6

GRAPHS


Ferrous Alloys

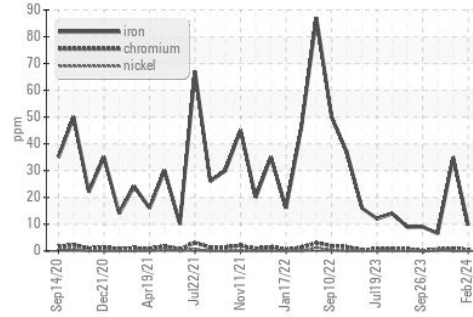


Non-ferrous Metals

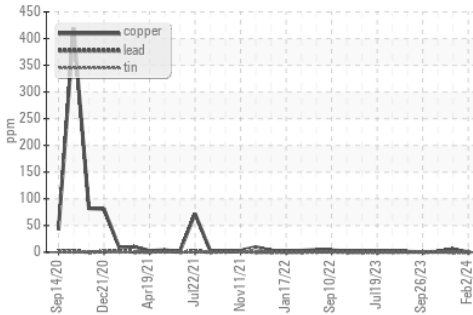

Viscosity @ 100°C

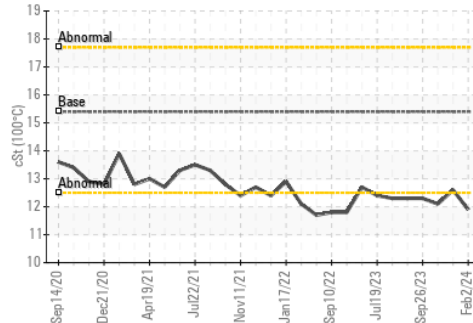

Base Number

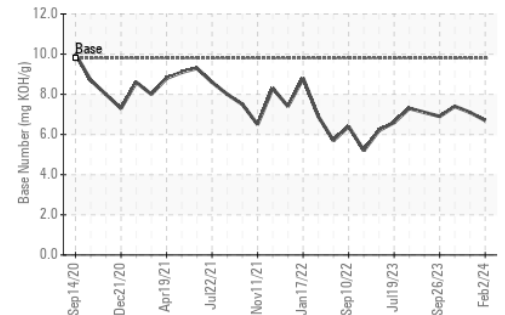

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0109083

Lab Number : 06084482

Unique Number : 10871927

Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

Received : 09 Feb 2024

Tested : 13 Feb 2024

Diagnosed : 13 Feb 2024 - Wes Davis

GFL Environmental - 009 - Fairburn

6905 Roosevelt Hwy

Fairburn, GA

US 30213

Contact: Eric Jones

erjones@gflenv.com

T: (678)630-9927

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)